

35×35×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5v U 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 10g

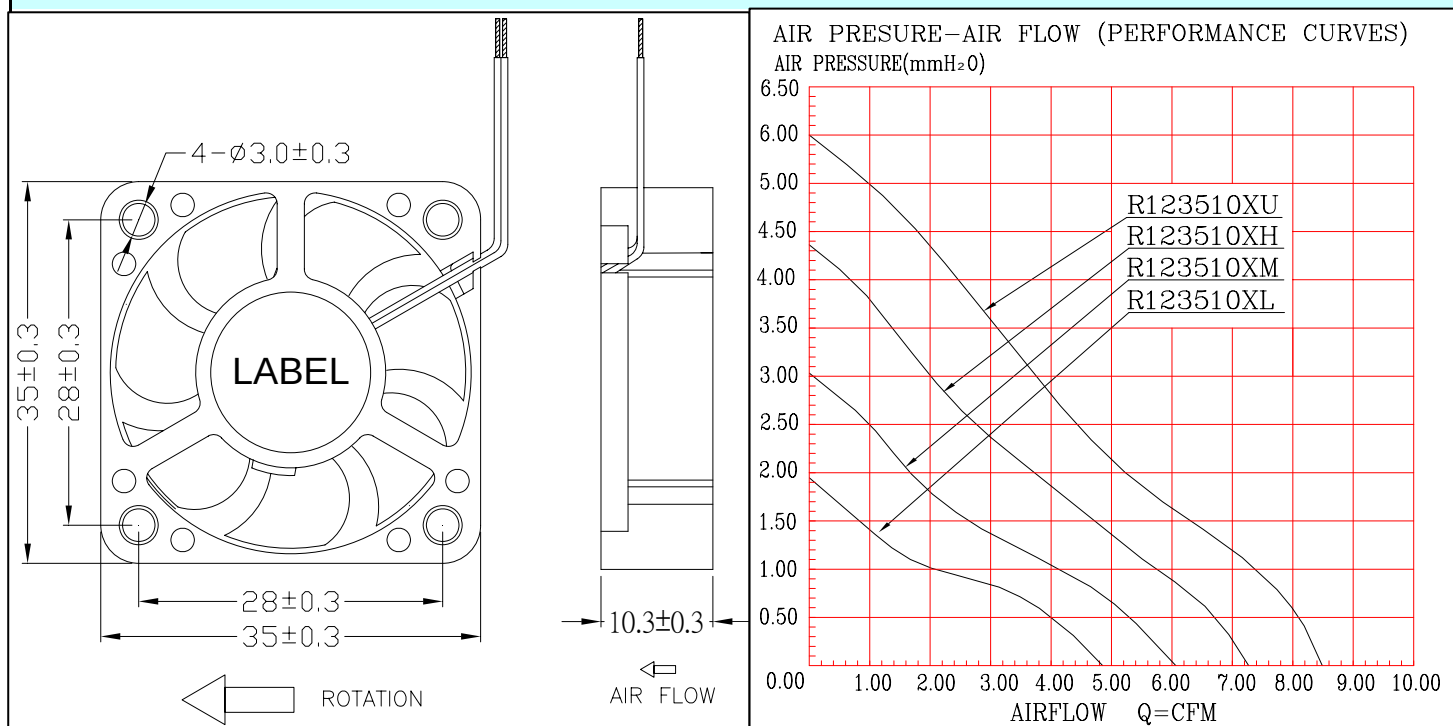

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R123510BL	12	7~13.2	0.16	1.92	6000	4.85	0.14	1.94	22.5
R123510BM	12	7~13.2	0.18	2.16	7500	6.06	0.17	3.03	25.3
R123510BH	12	7~13.2	0.25	3.00	9000	7.27	0.21	4.37	31
R123510BU	12	7~13.2	0.35	4.20	10500	8.48	0.24	6.00	34
R123510SL	12	7~13.2	0.16	1.92	6000	4.85	0.14	1.94	22.5
R123510SM	12	7~13.2	0.18	2.16	7500	6.06	0.17	3.03	25.3
R123510SH	12	7~13.2	0.25	3.00	9000	7.27	0.21	4.37	31
R123510SU	12	7~13.2	0.35	4.20	10500	8.48	0.24	6.00	34

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

40×40×7MM SERIES

Bearing Type:

EBR

Rated Voltage: 5v L.M.H.U

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 15g

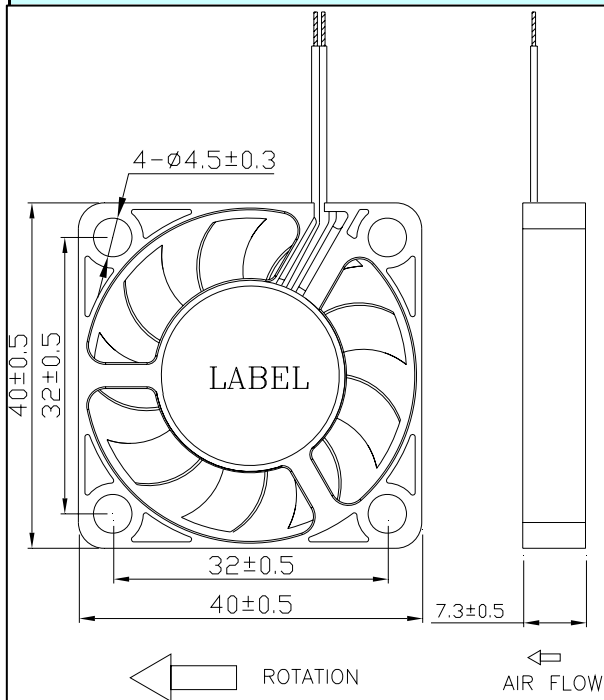

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESURE(mmH₂O)

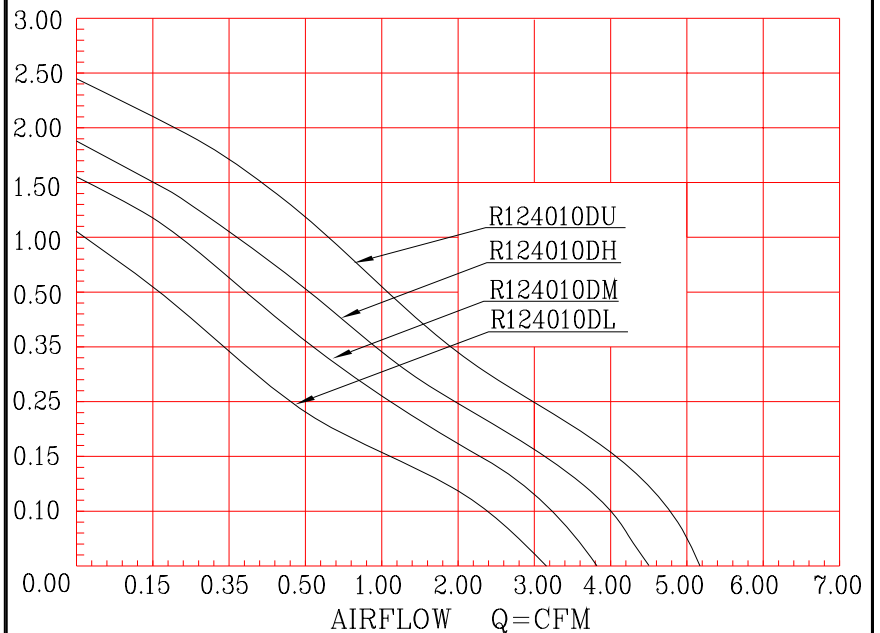

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010SL	12	7~13.2	0.10	1.20	5000	3.17	0.09	1.07	22.6
R124010SM	12	7~13.2	0.12	1.44	6000	3.81	0.11	1.55	25.8
R124010SH	12	7~13.2	0.14	1.68	7000	4.45	0.13	1.88	28.9
R124010SU	12	7~13.2	0.18	2.16	8000	5.08	0.14	2.46	32.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 15g

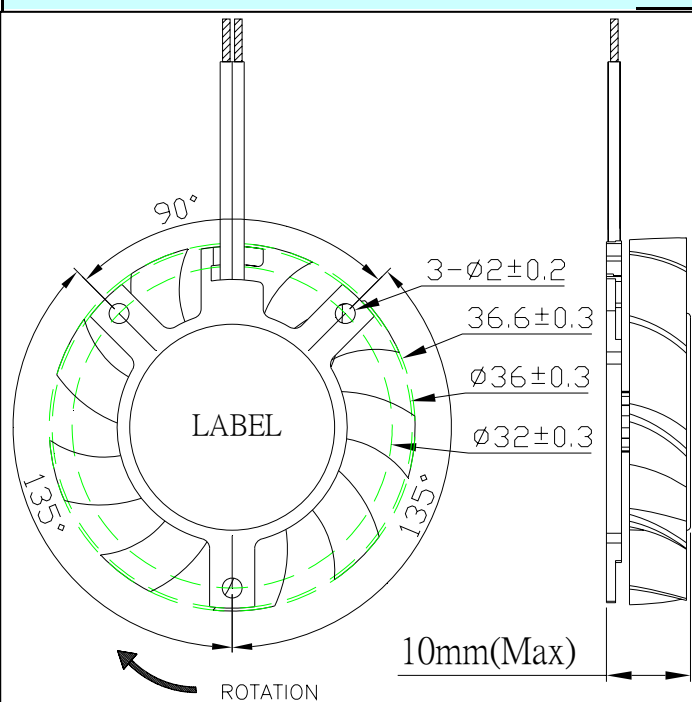

AIR PRESURE-AIR FLOW(PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

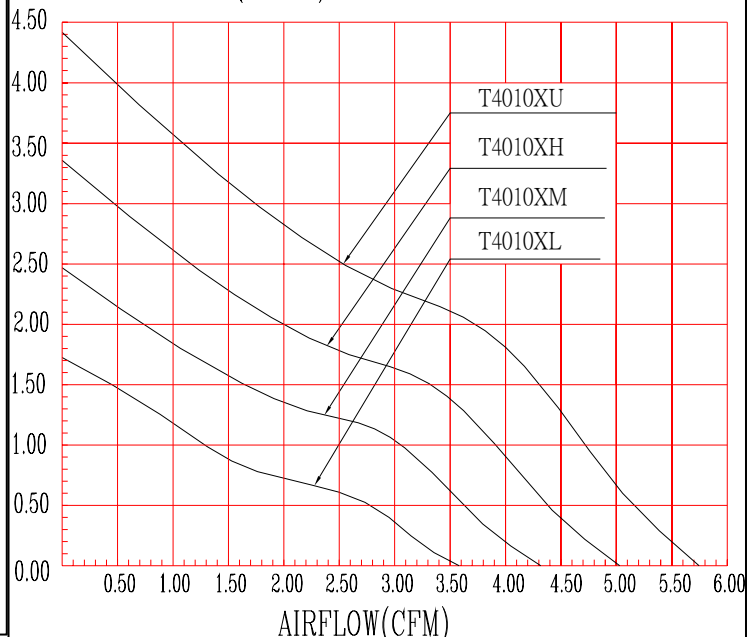

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T124010BL	12	7~13.2	0.10	1.20	5000	3.59	0.10	1.73	24
T124010BM	12	7~13.2	0.12	1.44	6000	4.31	0.12	2.49	26
T124010BH	12	7~13.2	0.14	1.68	7000	5.03	0.14	3.39	28.1
T124010BU	12	7~13.2	0.18	2.16	8000	5.75	0.16	4.42	30.2
T124010DL	12	7~13.2	0.10	1.20	5000	3.59	0.10	1.73	24
T124010DM	12	7~13.2	0.12	1.44	6000	4.31	0.12	2.49	26
T124010DH	12	7~13.2	0.14	1.68	7000	5.03	0.14	3.39	28.1
T124010DU	12	7~13.2	0.18	2.16	8000	5.75	0.16	4.42	30.2
T124010SL	12	7~13.2	0.10	1.20	5000	3.59	0.10	1.73	24
T124010SM	12	7~13.2	0.12	1.44	6000	4.31	0.12	2.49	26
T124010SH	12	7~13.2	0.14	1.68	7000	5.03	0.14	3.39	28.1
T124010SU	12	7~13.2	0.18	2.16	8000	5.75	0.16	4.42	30.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×8MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 15g

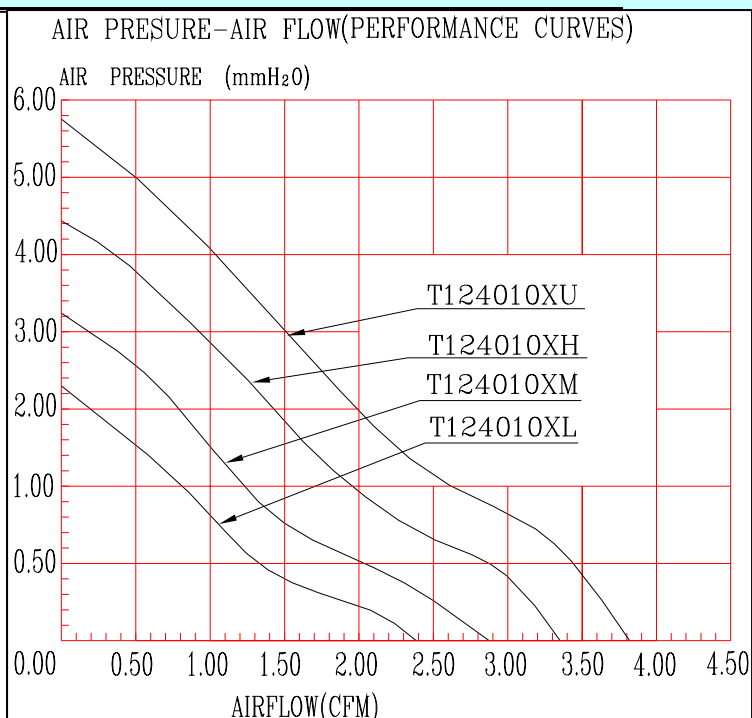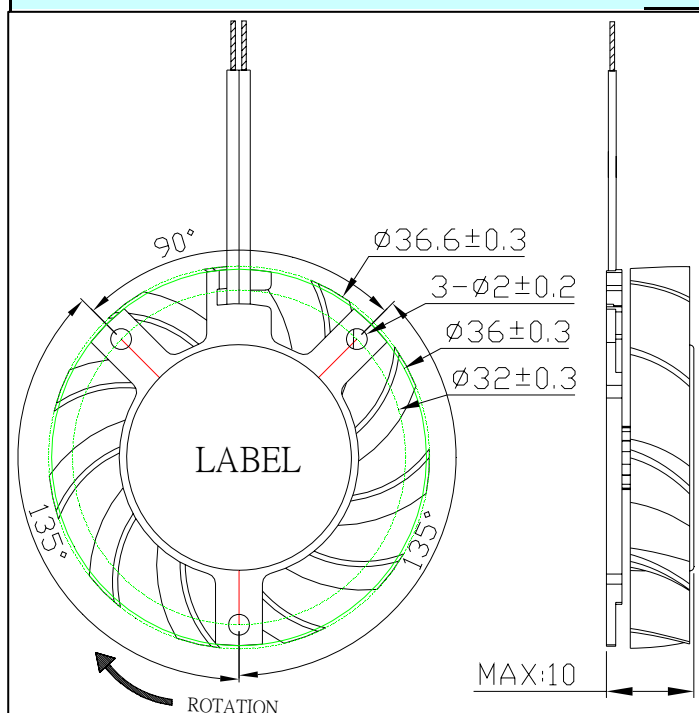

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T124010BL	12	7~13.2	0.10	1.20	5000	2.39	0.07	2.26	27.9
T124010BM	12	7~13.2	0.12	1.44	6000	2.87	0.08	3.23	32.5
T124010BH	12	7~13.2	0.14	1.68	7000	3.34	0.09	4.42	35.2
T124010BU	12	7~13.2	0.18	2.16	8000	3.82	0.11	5.77	38.4
T124010DL	12	7~13.2	0.10	1.20	5000	2.39	0.07	2.26	27.9
T124010DM	12	7~13.2	0.12	1.44	6000	2.87	0.08	3.23	32.5
T124010DH	12	7~13.2	0.14	1.68	7000	3.34	0.09	4.42	35.2
T124010DU	12	7~13.2	0.18	2.16	8000	3.82	0.11	5.77	38.4
T124010SL	12	7~13.2	0.10	1.20	5000	2.39	0.07	2.26	27.9
T124010SM	12	7~13.2	0.12	1.44	6000	2.87	0.08	3.23	32.5
T124010SH	12	7~13.2	0.14	1.68	7000	3.34	0.09	4.42	35.2
T124010SU	12	7~13.2	0.18	2.16	8000	3.82	0.11	5.77	38.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 12g

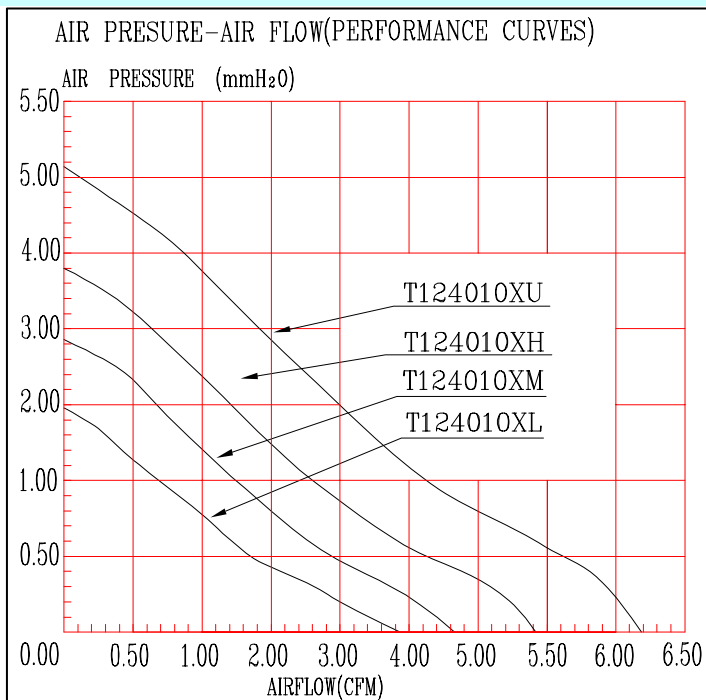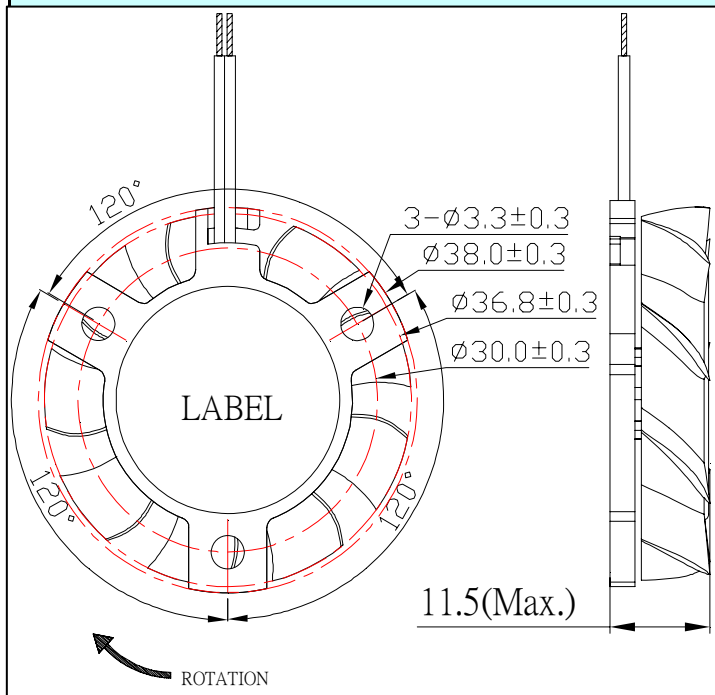

此款孔徑有2.3MM 跟3.3MM

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T124010BL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
T124010BM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
T124010BH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
T124010BU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7
T124010DL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
T124010DM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
T124010DH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
T124010DU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7
T124010SL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
T124010SM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
T124010SH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
T124010SU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 15g

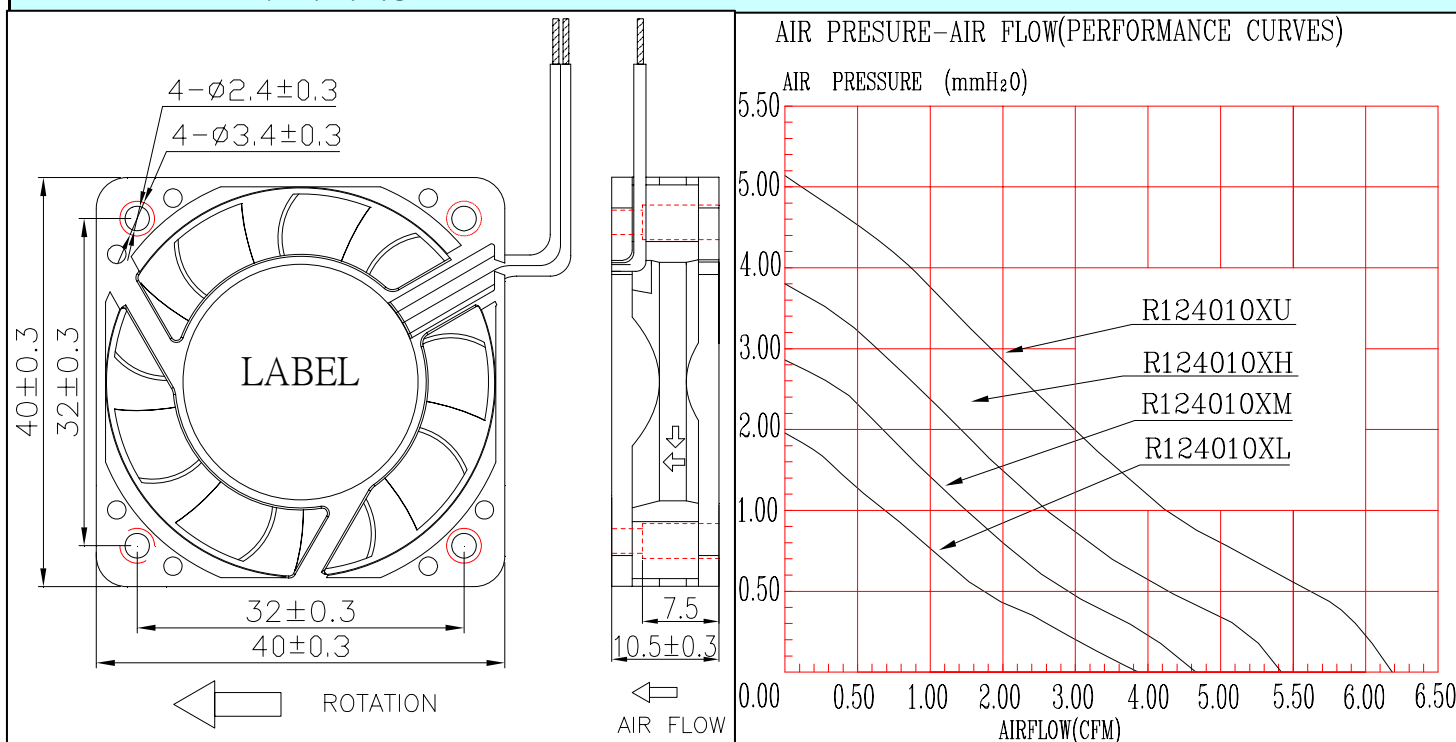

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7
R124010DL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
R124010DM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
R124010DH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
R124010DU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 15g

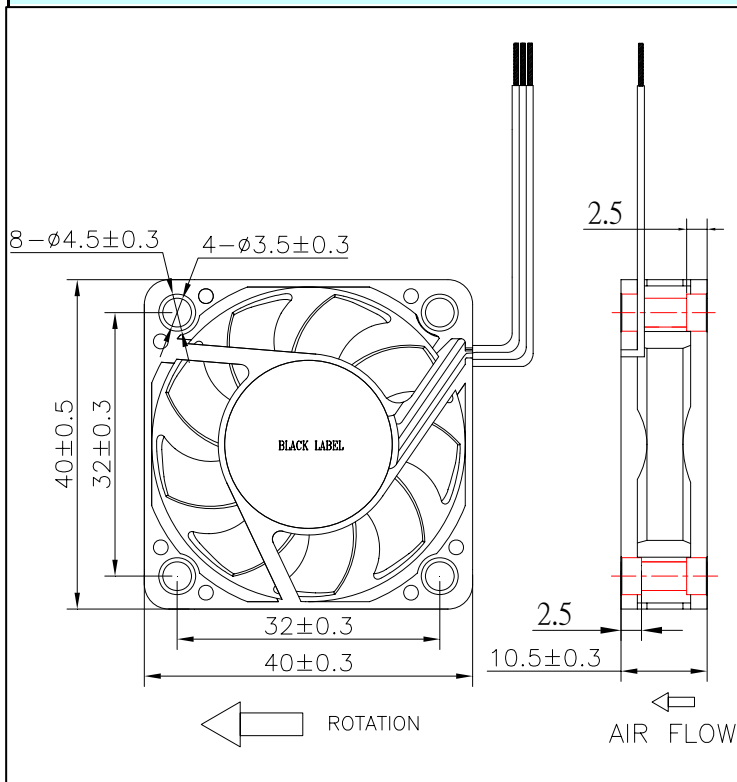

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

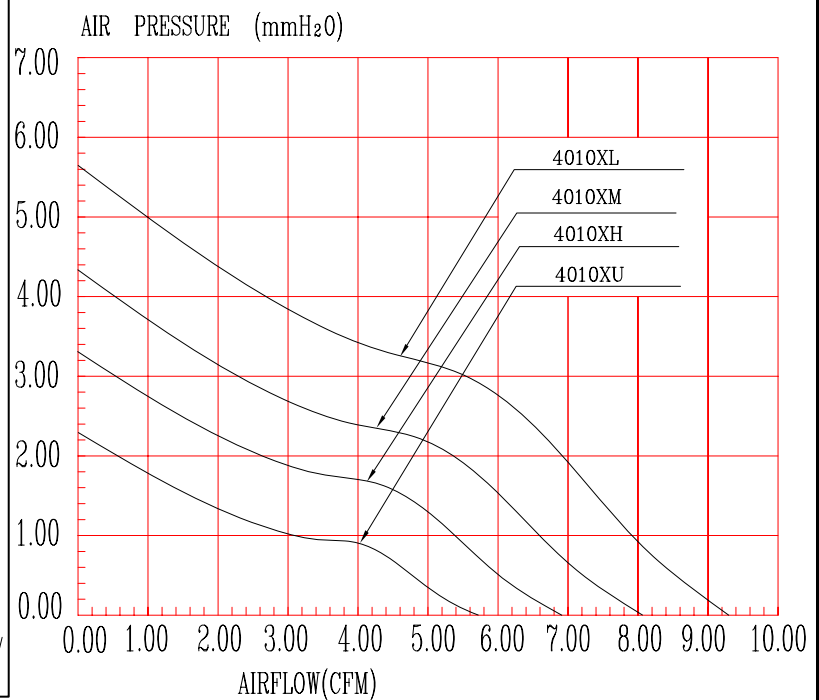

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	5.77	0.16	2.33	23.5
R124010BM	12	7~13.2	0.12	1.44	6000	6.92	0.20	3.35	28.3
R124010BH	12	7~13.2	0.14	1.68	7000	8.11	0.23	4.36	34.2
R124010BU	12	7~13.2	0.18	2.16	8000	9.27	0.26	5.69	36.3
R124010DL	12	7~13.2	0.10	1.20	5000	5.77	0.16	2.33	23.5
R124010DM	12	7~13.2	0.12	1.44	6000	6.92	0.20	3.35	28.3
R124010DH	12	7~13.2	0.14	1.68	7000	8.11	0.23	4.36	34.2
R124010DU	12	7~13.2	0.18	2.16	8000	9.27	0.26	5.69	36.3
R124010SL	12	7~13.2	0.10	1.20	5000	5.77	0.16	2.33	23.5
R124010SM	12	7~13.2	0.12	1.44	6000	6.92	0.20	3.35	28.3
R124010SH	12	7~13.2	0.14	1.68	7000	8.11	0.23	4.36	34.2
R124010SU	12	7~13.2	0.18	2.16	8000	9.27	0.26	5.69	36.3
					9000				40.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 15g

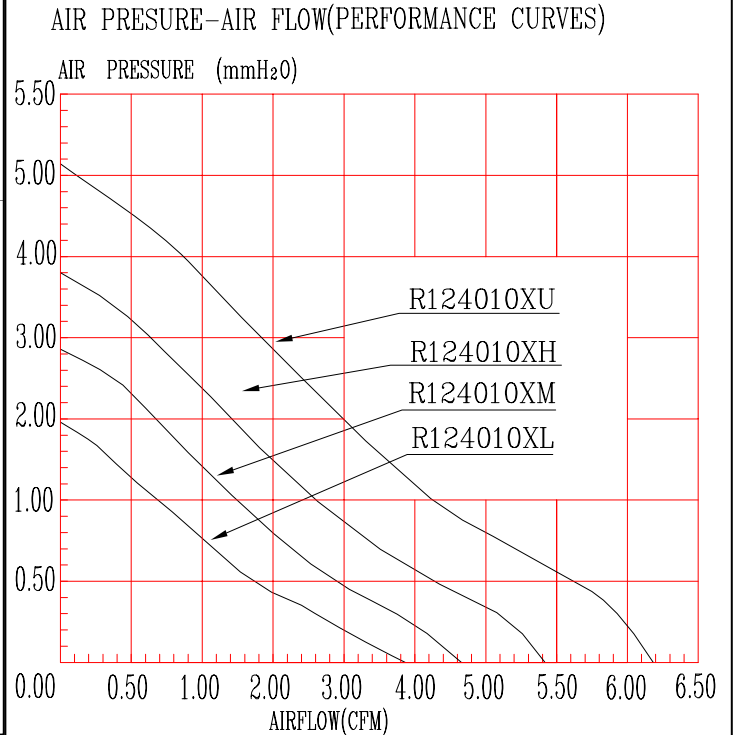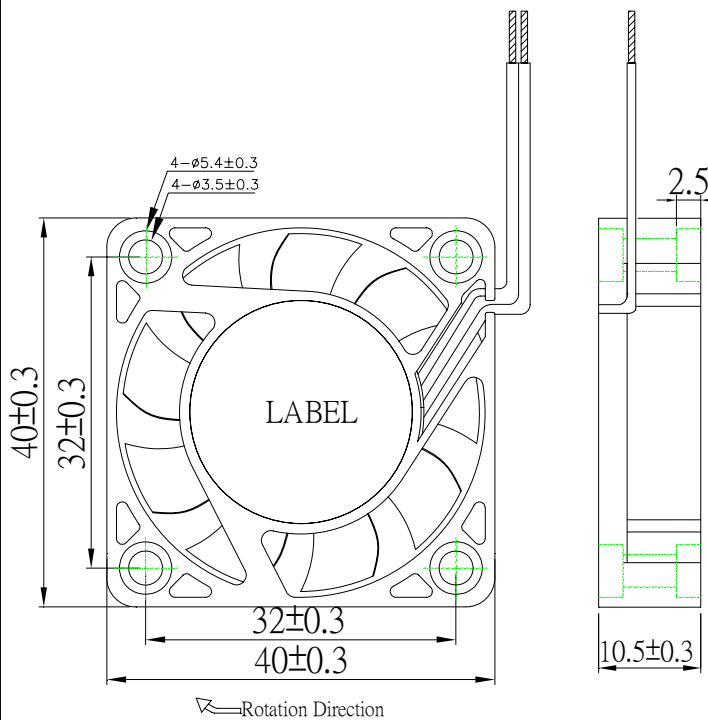

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7
R124010DL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
R124010DM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
R124010DH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
R124010DU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 15g

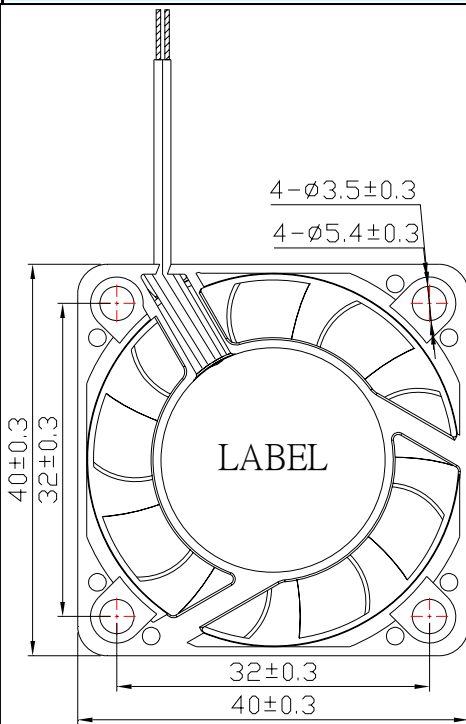

Rotation Direction

AIR PRESURE-AIR FLOW(PERFORMANCE CURVES)

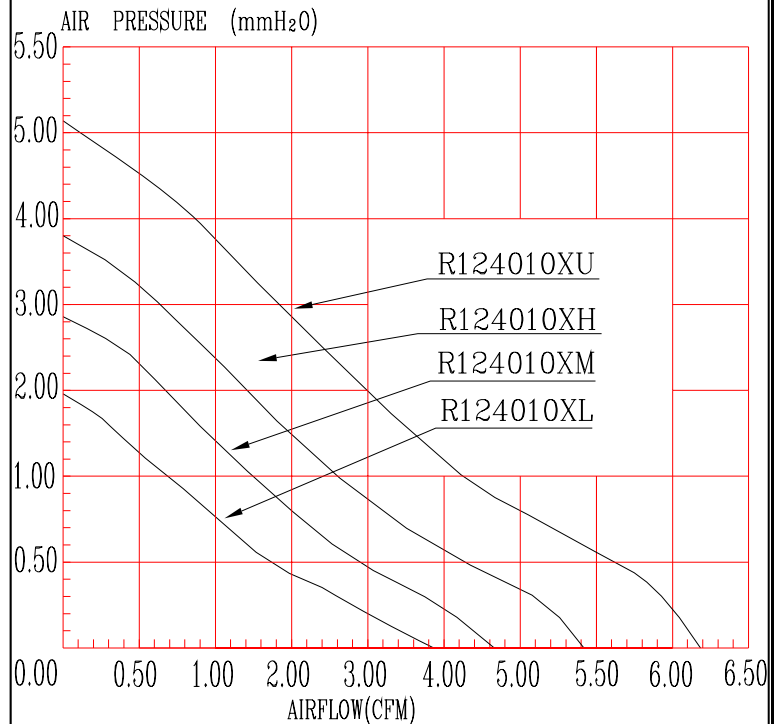

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7
R124010DL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
R124010DM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
R124010DH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
R124010DU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	3.86	0.11	1.99	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	4.64	0.13	2.87	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	5.41	0.15	3.90	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	6.18	0.18	5.09	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×20MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5v L.M

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 30g

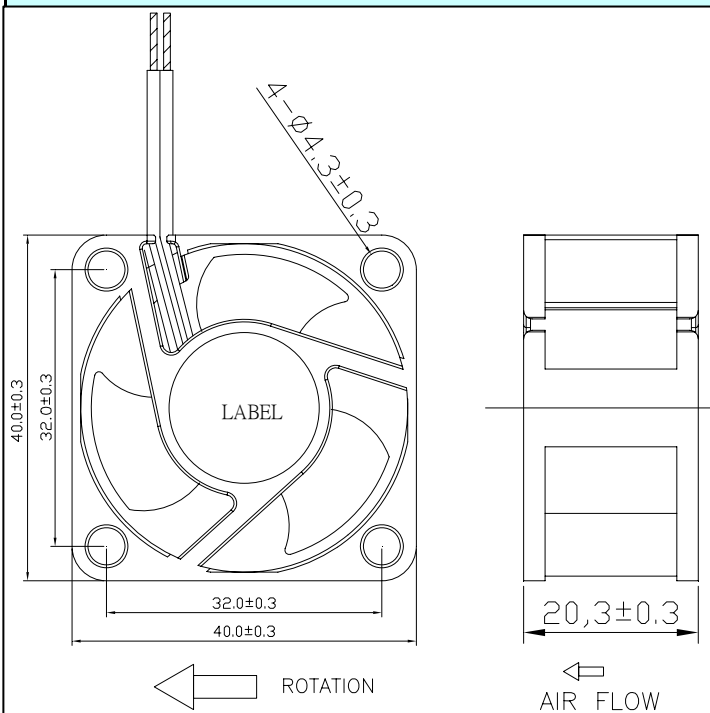

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

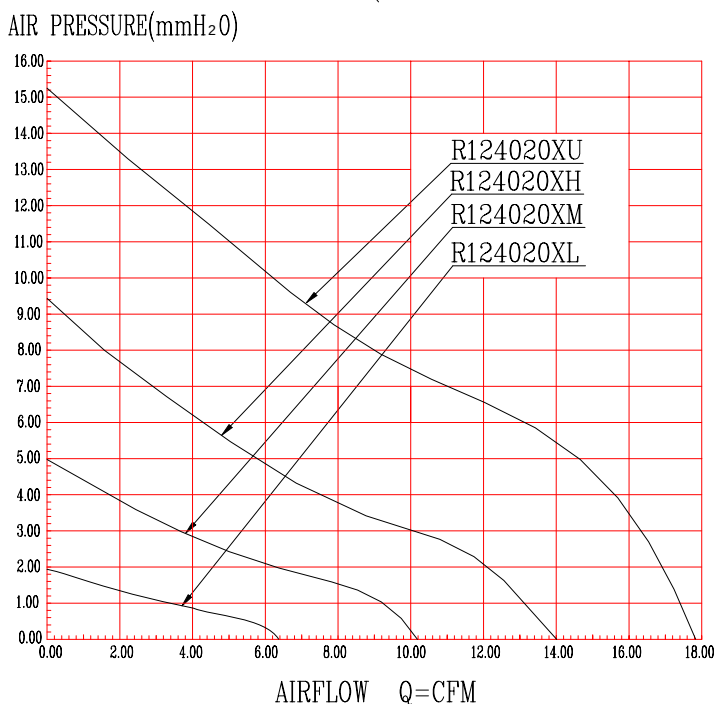

此款模具我司目前有4.3mm 3.6mm的螺絲孔徑.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124020BL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	24.5
R124020BM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	34.8
R124020BH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	45.4
R124020BU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	49.4
R124020DL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	24.5
R124020DM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	34.8
R124020DH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	45.4
R124020DU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	49.4
R104020SL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	24.5
R124020SM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	34.8
R124020SH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	45.4
R124020SU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	49.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5v L.M
12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 30g

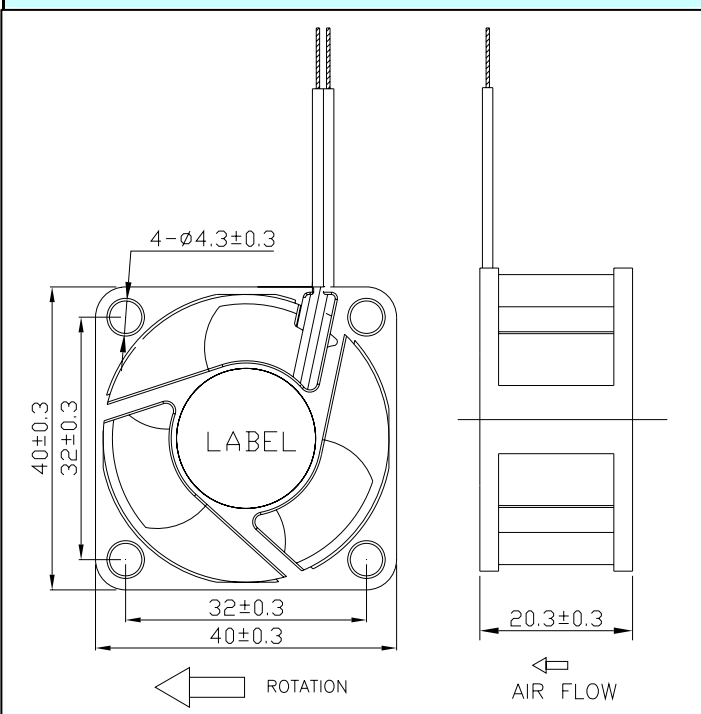

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

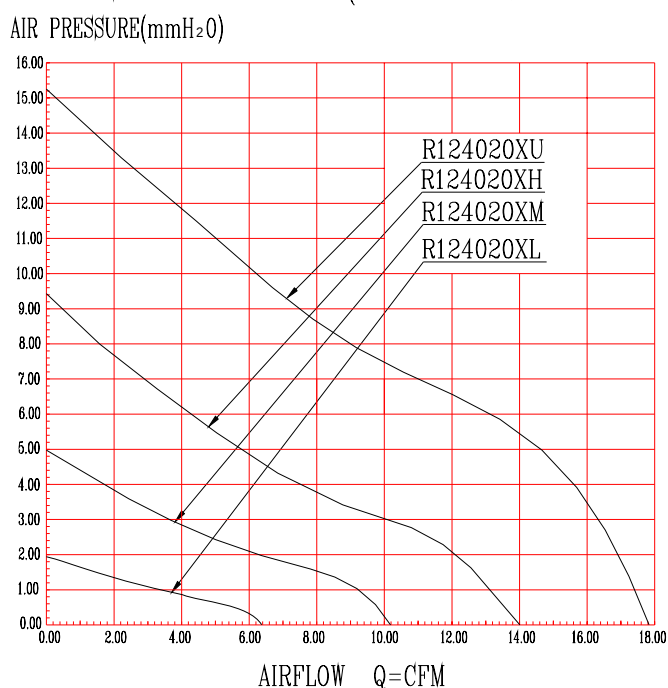

此款模具我司目前有4.3mm 3.6mm的螺絲孔徑.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124020BL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	24.5
R124020BM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	34.8
R124020BH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	45.4
R124020BU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	49.4
R124020DL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	24.5
R124020DM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	34.8
R124020DH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	45.4
R124020DU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	49.4
R104020SL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	24.5
R124020SM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	34.8
R124020SH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	45.4
R124020SU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	49.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5v L.M
12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 30g

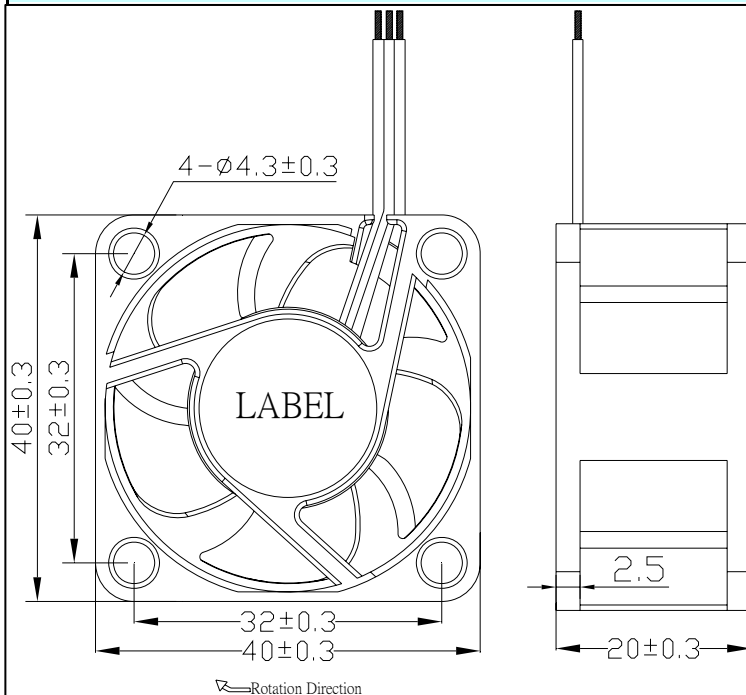

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

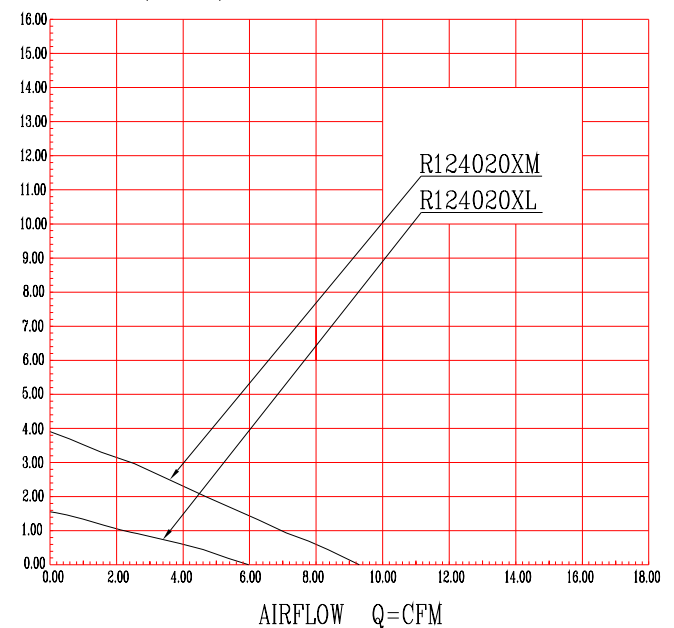

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124020BL	12	7~13.2	0.13	1.56	5000	5.90	0.17	1.58	21.2
R124020BM	12	7~13.2	0.16	1.92	8000	9.50	0.27	3.95	27.8
R124020SL	12	7~13.2	0.13	1.56	5000	5.90	0.17	1.58	21.2
R124020SM	12	7~13.2	0.16	1.92	8000	9.50	0.27	3.95	27.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×28MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 31g

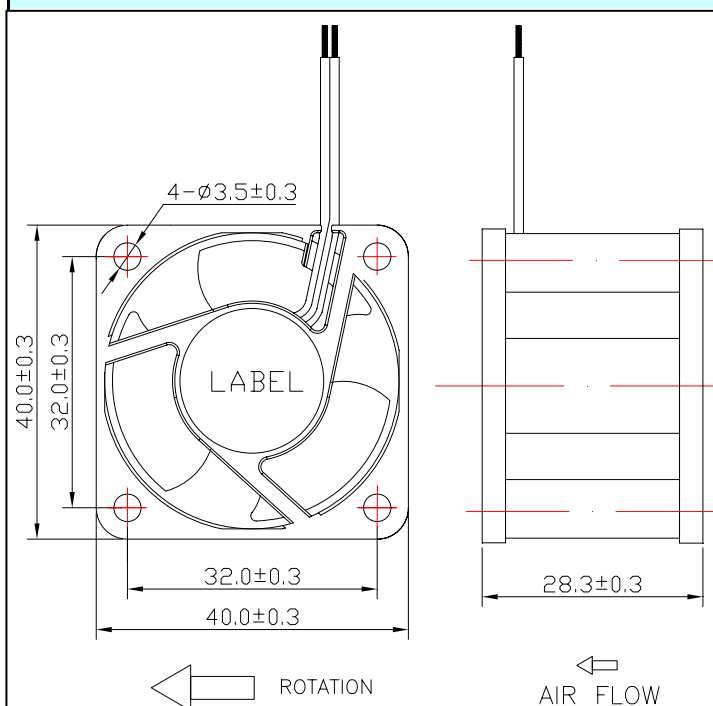

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

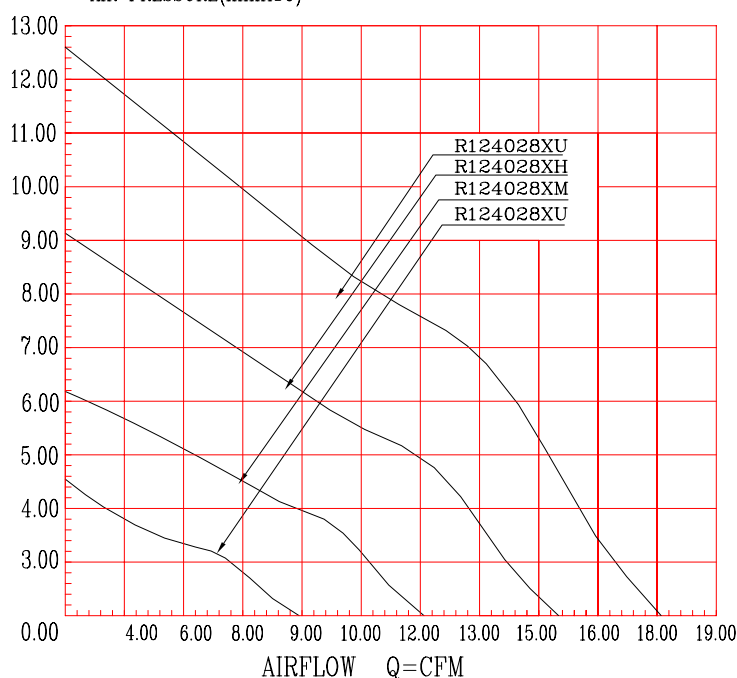

此款模具我司目前有4.3mm 3.5mm的螺絲孔徑.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124028BL	12	7~13.2	0.15	1.8	6000	8.94	0.25	3.57	26.9
R124028BM	12	7~13.2	0.18	2.16	8000	12.03	0.34	6.19	33.9
R124028BH	12	7~13.2	0.28	3.36	10000	15.32	0.43	9.16	39.9
R124028BU	12	7~13.2	0.40	4.8	12000	18.06	0.51	12.60	43.5
R124028SL	12	7~13.2	0.15	1.8	6000	8.94	0.25	3.57	26.9
R124028SM	12	7~13.2	0.18	2.16	8000	12.03	0.34	6.19	33.9
R124028SH	12	7~13.2	0.28	3.36	10000	15.32	0.43	9.16	39.9
R124028SU	12	7~13.2	0.40	4.8	12000	18.06	0.51	12.60	43.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

40×40×28MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

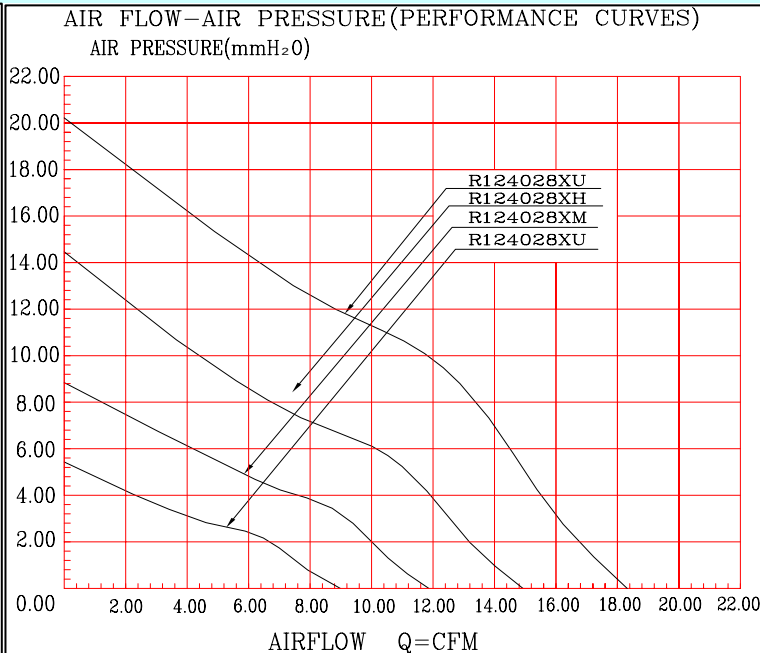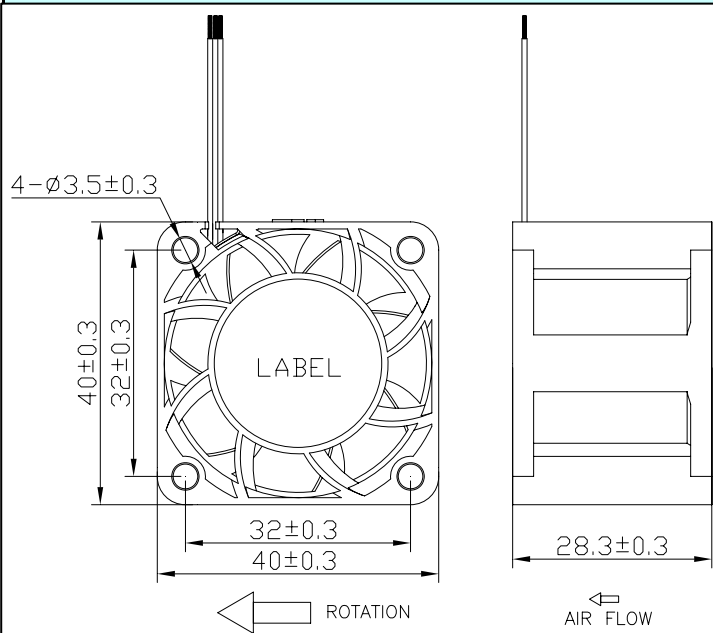

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124028BL	12	7~13.2	0.15	1.80	6000	8.92	0.25	5.36	32
R124028BM	12	7~13.2	0.18	2.16	8000	11.89	0.34	8.82	38.4
R124028BH	12	7~13.2	0.28	3.36	10000	14.85	0.42	14.5	43.4
R124028BU	12	7~13.2	0.40	4.80	12000	18.03	0.51	20.2	48.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

40×40×56MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 77g

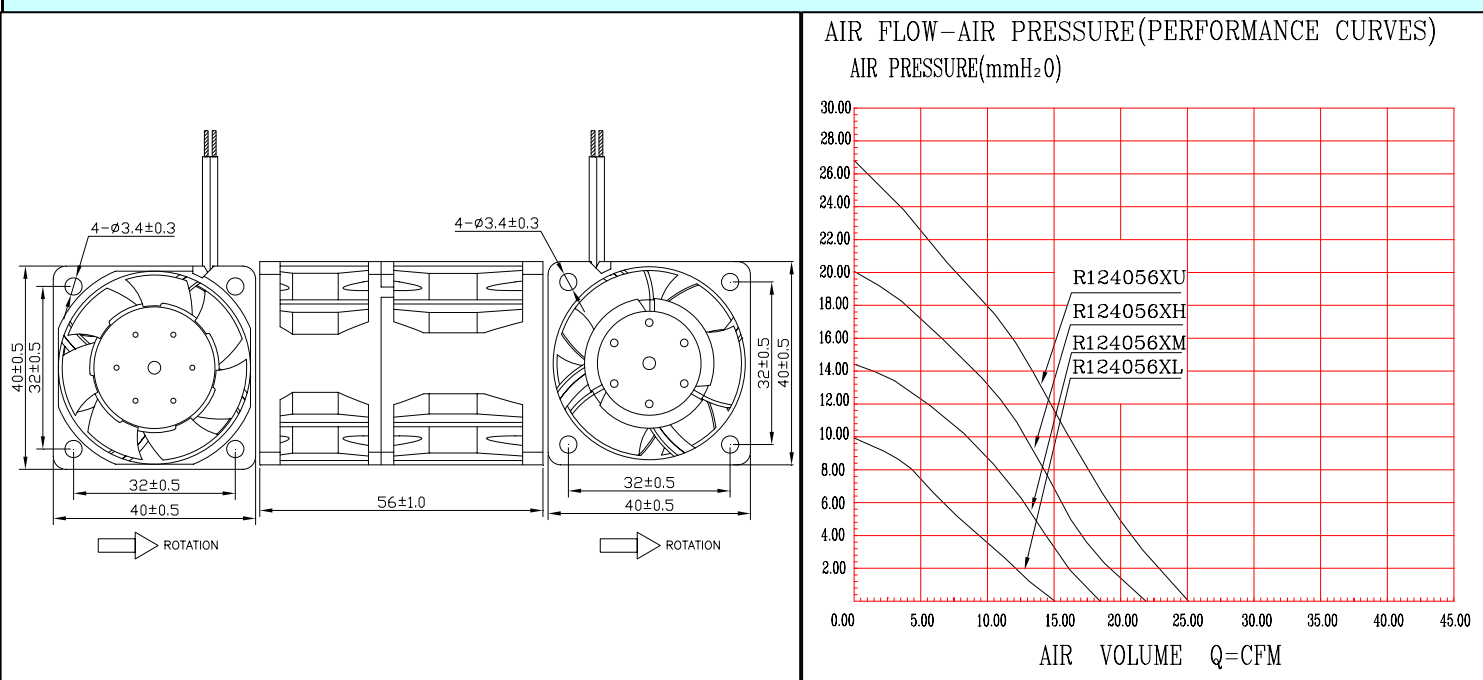

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124056BL	12	7~13.2	0.60	7.2	9000	15.10	0.43	9.66	48.8
R124056BM	12	7~13.2	0.90	10.8	11000	18.46	0.52	14.42	52.3
R124056BH	12	7~13.2	1.20	14.4	13000	21.81	0.62	20.15	56.5
R124056BU	12	7~13.2	1.50	18	15000	25.17	0.71	26.82	57.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×40MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 25g

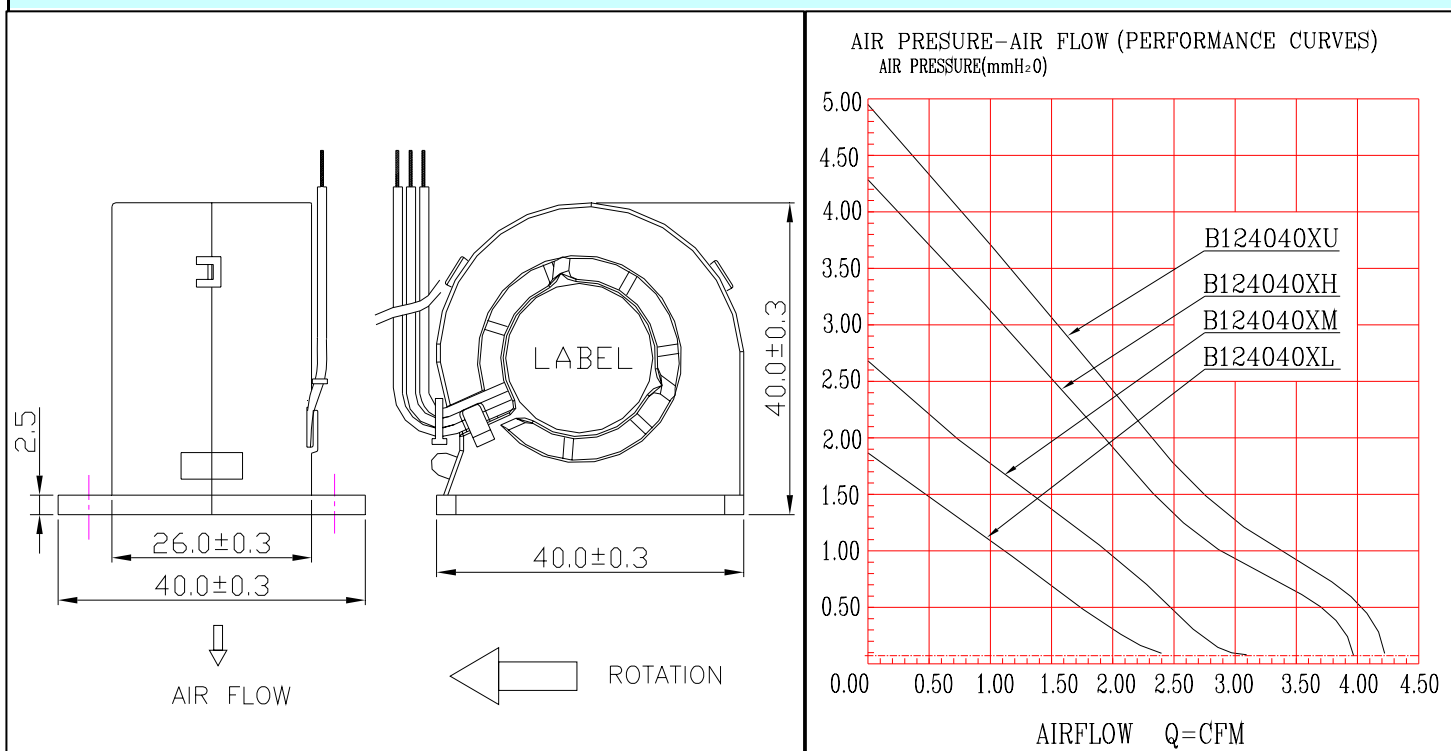

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
BB4040BL	12	7~13.2	0.20	2.40	5000	2.40	0.07	1.88	22.6
BB4040BM	12	7~13.2	0.28	3.36	6700	3.07	0.09	2.70	27.6
BB4040BH	12	7~13.2	0.35	4.20	8400	3.98	0.11	4.29	40.4
BB4040BU	12	7~13.2	0.40	4.80	9000	4.29	0.12	4.96	41.6
BB4040SL	12	7~13.2	0.20	2.40	5000	2.40	0.07	1.88	22.6
BB4040SM	12	7~13.2	0.28	3.36	6700	3.07	0.09	2.70	27.6
BB4040SH	12	7~13.2	0.35	4.20	8400	3.98	0.11	4.29	40.4
BB4040SU	12	7~13.2	0.40	4.80	9000	4.29	0.12	4.96	41.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

45×45×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

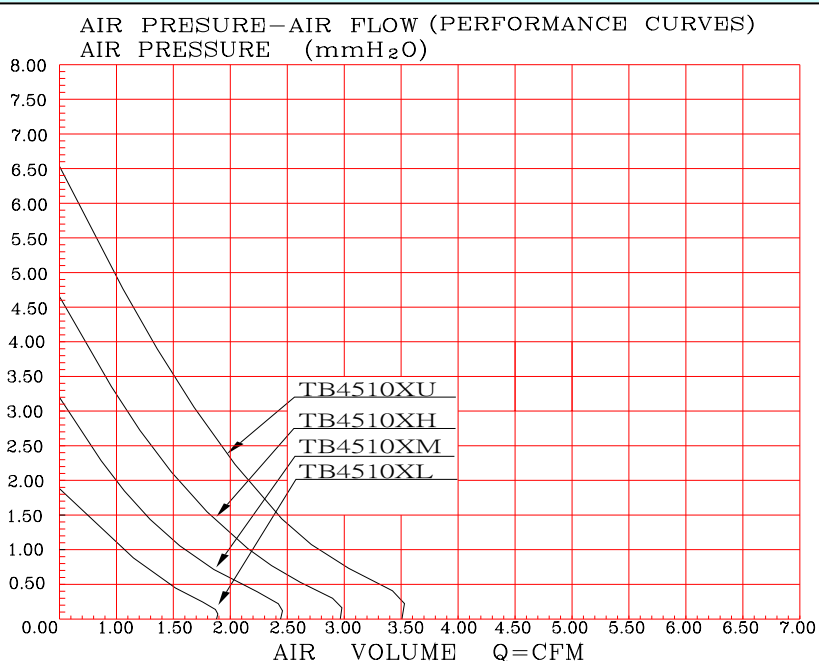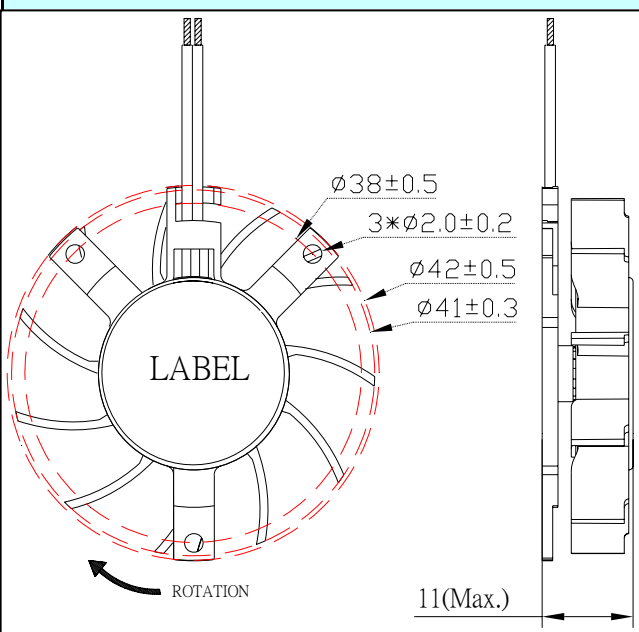

此基架有:有卡扣及無卡扣(直通式)

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010DL	12	7~13.2	0.13	1.56	3500	1.89	0.05	1.89	26.4
T125010DM	12	7~13.2	0.15	1.80	4500	2.43	0.07	3.12	32.1
T125010DH	12	7~13.2	0.25	3.00	5500	2.97	0.08	4.66	38
T125010DU	12	7~13.2	0.32	3.84	6500	3.51	0.10	6.51	38.9
T125010BL	12	7~13.2	0.13	1.56	3500	1.89	0.05	1.89	26.4
T125010BM	12	7~13.2	0.15	1.80	4500	2.43	0.07	3.12	32.1
T125010BH	12	7~13.2	0.25	3.00	5500	2.97	0.08	4.66	38
T125010BU	12	7~13.2	0.32	3.84	6500	3.51	0.10	6.51	38.9
T125010SL	12	7~13.2	0.13	1.56	3500	1.89	0.05	1.89	26.4
T125010SM	12	7~13.2	0.15	1.80	4500	2.43	0.07	3.12	32.1
T125010SH	12	7~13.2	0.25	3.00	5500	2.97	0.08	4.66	38
T125010SU	12	7~13.2	0.32	3.84	6500	3.51	0.10	6.51	38.9

*Sound level measured at the distance of one meter from the axis of intake.

50×50×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 10g

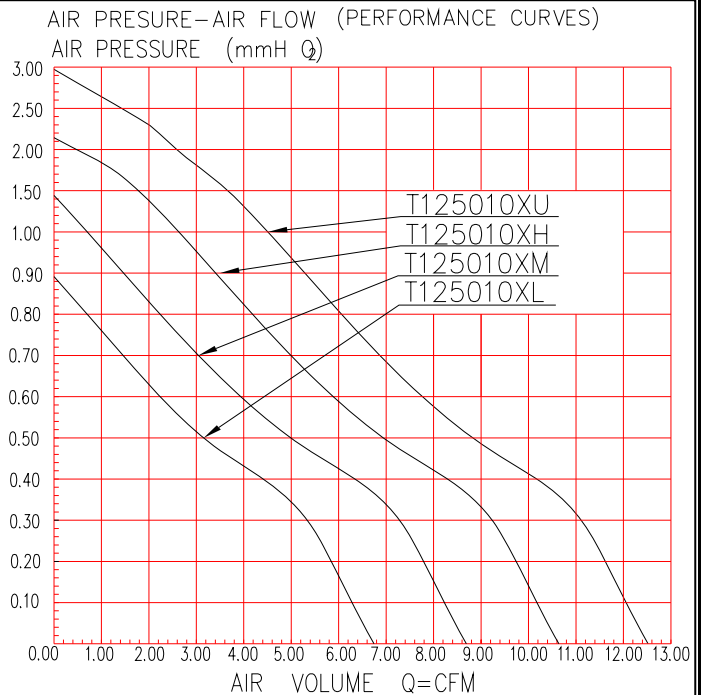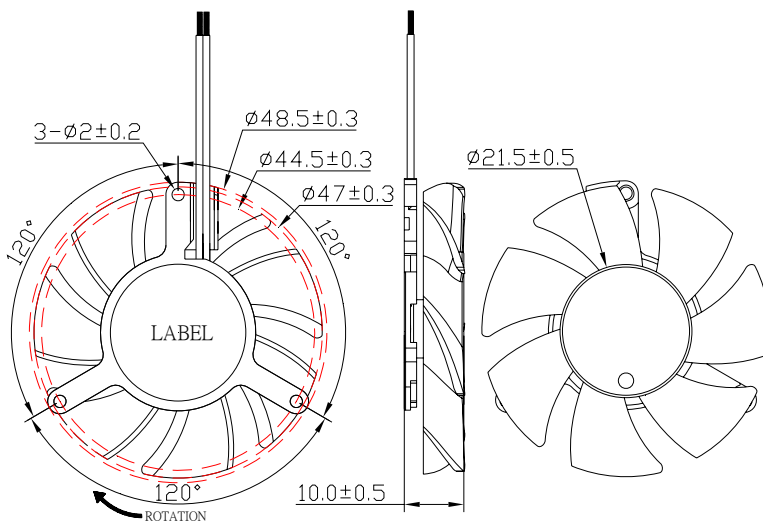

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010DL	12	7~13.2	0.13	1.56	3500	6.74	0.19	0.87	21
T125010DM	12	7~13.2	0.15	1.80	4500	8.68	0.25	1.44	
T125010DH	12	7~13.2	0.25	3.00	5500	10.61	0.30	2.14	
T125010DU	12	7~13.2	0.32	3.84	6500	12.53	0.36	2.99	
T125010SL	12	7~13.2	0.13	1.56	3500	6.74	0.19	0.87	21
T125010SM	12	7~13.2	0.15	1.80	4500	8.68	0.25	1.44	
T125010SH	12	7~13.2	0.25	3.00	5500	10.61	0.30	2.14	
T125010SU	12	7~13.2	0.32	3.84	6500	12.53	0.36	2.99	
T125010BL	12	7~13.2	0.13	1.56	3500	6.74	0.19	0.87	21
T125010BM	12	7~13.2	0.15	1.80	4500	8.68	0.25	1.44	
T125010BH	12	7~13.2	0.25	3.00	5500	10.61	0.30	2.14	
T125010BU	12	7~13.2	0.32	3.84	6500	12.53	0.36	2.99	

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 10g

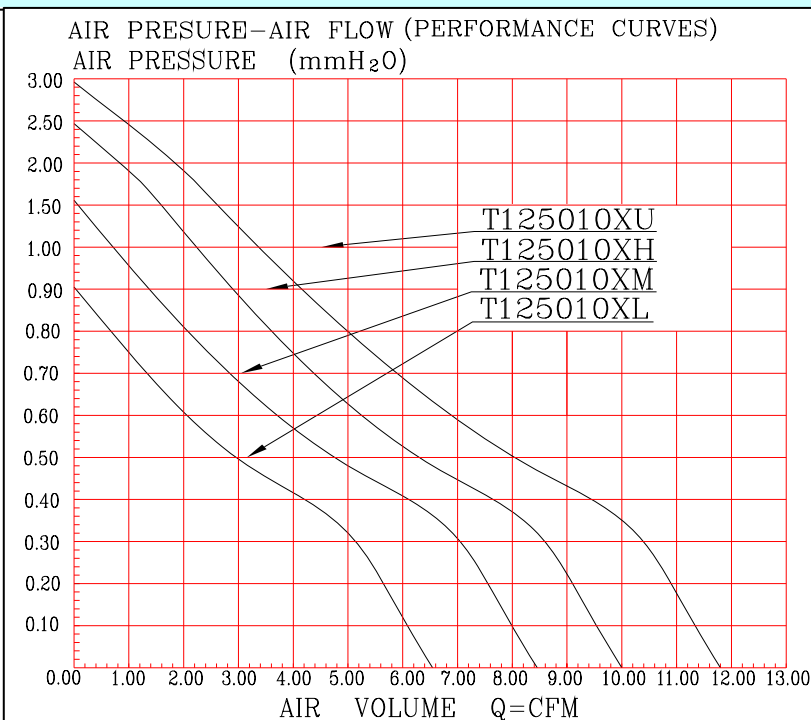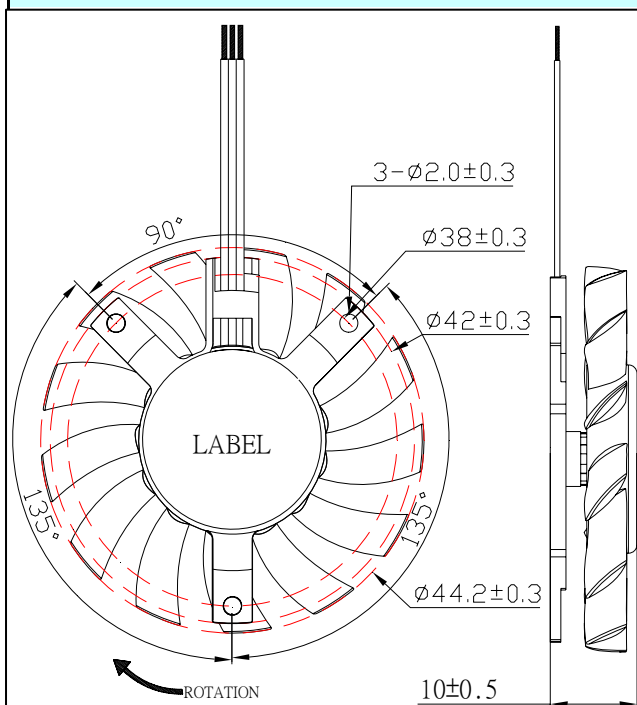

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010DL	12	7~13.2	0.13	1.56	3500	6.57	0.19	0.94	24.5
T125010DM	12	7~13.2	0.15	1.80	4500	8.45	0.24	1.55	29
T125010DH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	34
T125010DU	12	7~13.2	0.32	3.84	6500	11.8	0.33	2.98	40
T125010SL	12	7~13.2	0.13	1.56	3500	6.57	0.19	0.94	24.5
T125010SM	12	7~13.2	0.15	1.80	4500	8.45	0.24	1.55	29
T125010SH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	34
T125010SU	12	7~13.2	0.32	3.84	6500	11.8	0.33	2.98	40
T125010BL	12	7~13.2	0.13	1.56	3500	6.57	0.19	0.94	24.5
T125010BM	12	7~13.2	0.15	1.80	4500	8.45	0.24	1.55	29
T125010BH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	34
T125010BU	12	7~13.2	0.32	3.84	6500	11.8	0.33	2.98	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

50×50×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

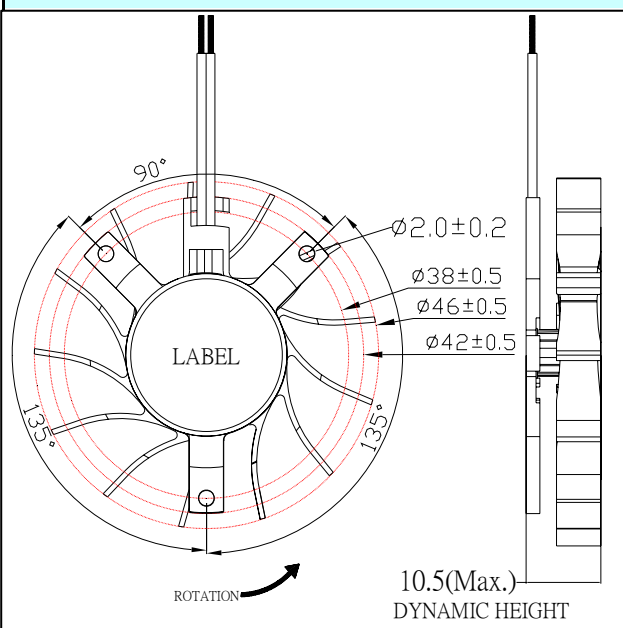

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

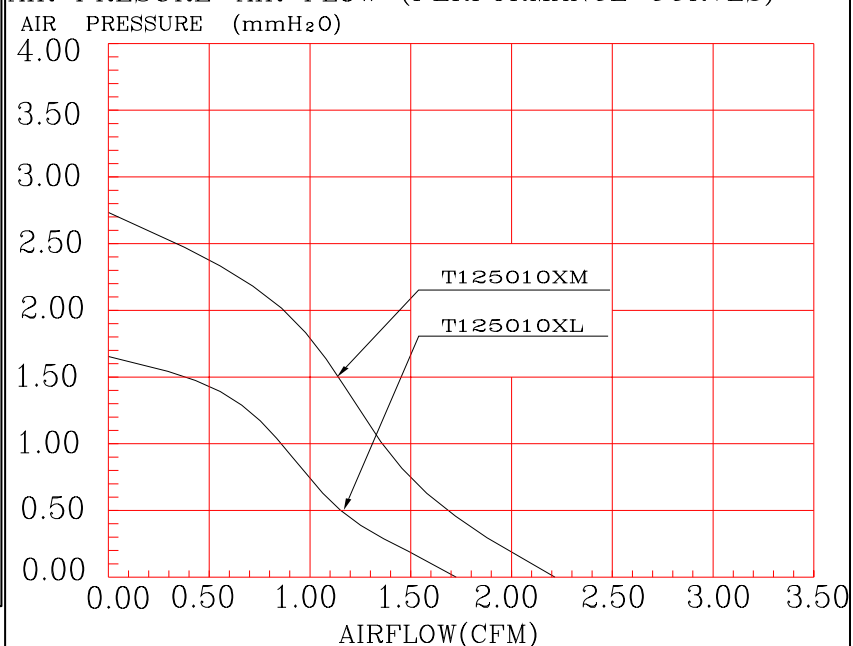

此基架有:有卡扣及無卡扣(直通式)

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010DL	12	7~13.2	0.13	1.56	3500	1.73	0.05	1.66	26
T125010DM	12	7~13.2	0.15	1.80	4500	2.23	0.06	2.74	34
T125010SL	12	7~13.2	0.13	1.56	3500	1.73	0.05	1.66	26
T125010SM	12	7~13.2	0.15	1.80	4500	2.23	0.06	2.74	34
T125010BL	12	7~13.2	0.13	1.56	3500	1.73	0.05	1.66	26
T125010BM	12	7~13.2	0.15	1.80	4500	2.23	0.06	2.74	34

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

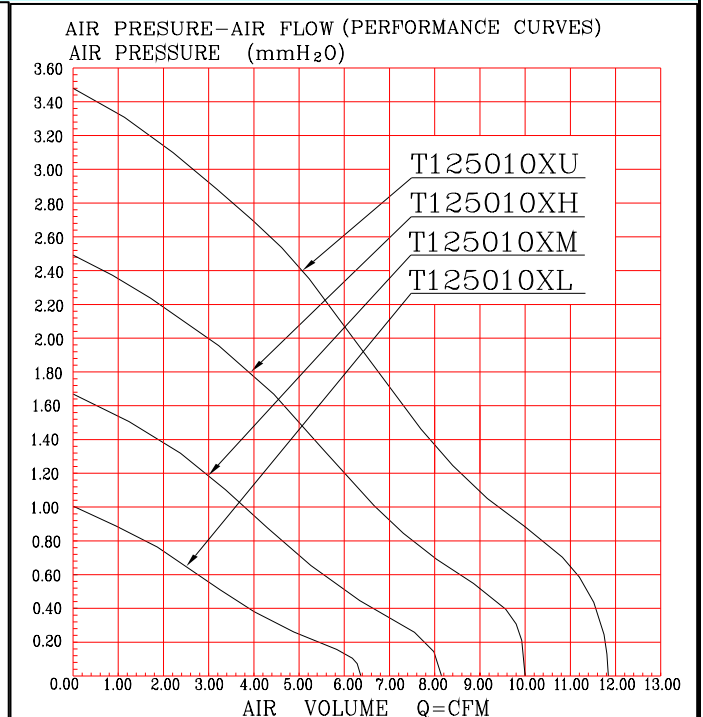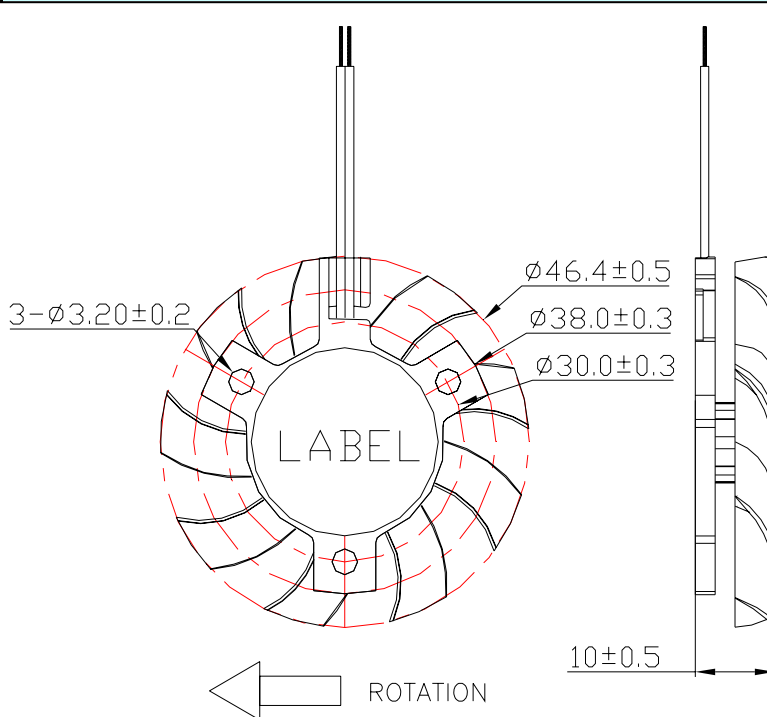

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010DL	12	7~13.2	0.13	1.56	3500	6.36	0.18	1.01	21.1
T125010DM	12	7~13.2	0.15	1.80	4500	8.18	0.23	1.67	25.7
T125010DH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	30.1
T125010DU	12	7~13.2	0.32	3.84	6500	11.82	0.33	3.48	34.7
T125010SL	12	7~13.2	0.13	1.56	3500	6.36	0.18	1.01	21.1
T125010SM	12	7~13.2	0.15	1.80	4500	8.18	0.23	1.67	25.7
T125010SH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	30.1
T125010SU	12	7~13.2	0.32	3.84	6500	11.82	0.33	3.48	34.7
T125010BL	12	7~13.2	0.13	1.56	3500	6.36	0.18	1.01	21.1
T125010BM	12	7~13.2	0.15	1.80	4500	8.18	0.23	1.67	25.7
T125010BH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	30.1
T125010BU	12	7~13.2	0.32	3.84	6500	11.82	0.33	3.48	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

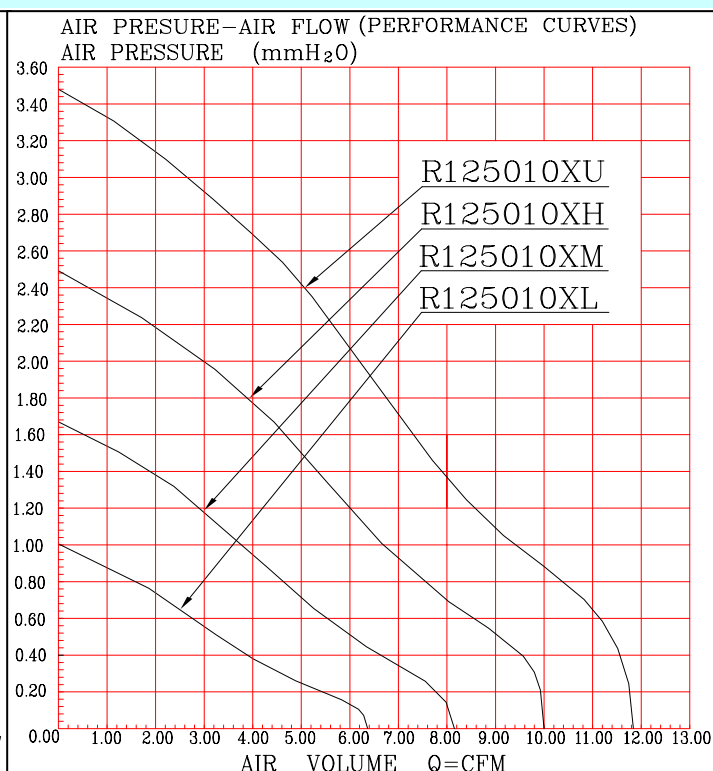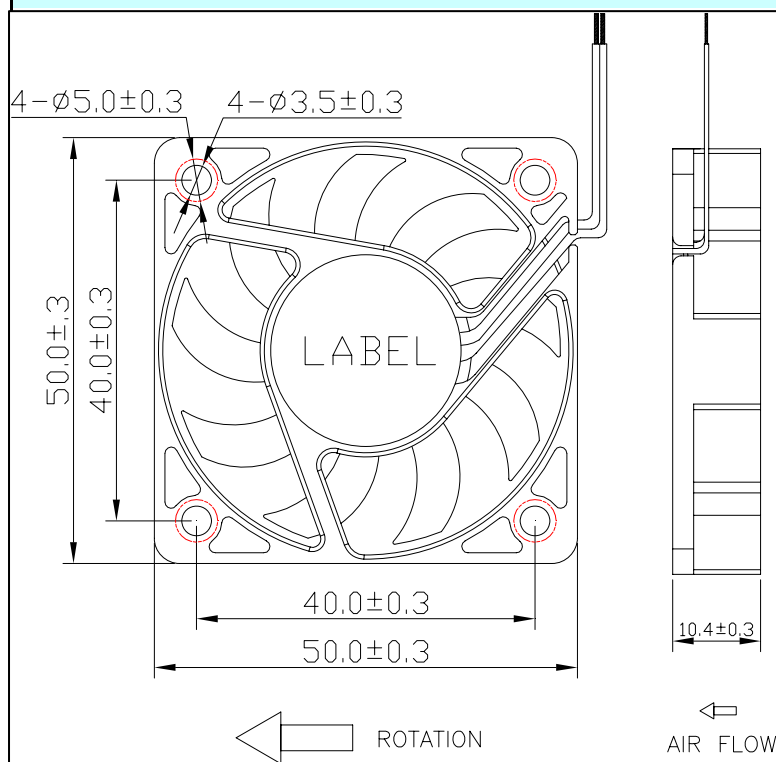

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125010DL	12	7~13.2	0.13	1.56	3500	6.36	0.18	1.01	21.1
R125010DM	12	7~13.2	0.15	1.80	4500	8.18	0.23	1.67	25.7
R125010DH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	30.1
R125010DU	12	7~13.2	0.32	3.84	6500	11.82	0.33	3.48	34.7
R125010SL	12	7~13.2	0.13	1.56	3500	6.36	0.18	1.01	21.1
R125010SM	12	7~13.2	0.15	1.80	4500	8.18	0.23	1.67	25.7
R125010SH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	30.1
R125010SU	12	7~13.2	0.32	3.84	6500	11.82	0.33	3.48	34.7
R125010BL	12	7~13.2	0.13	1.56	3500	6.36	0.18	1.01	21.1
R125010BM	12	7~13.2	0.15	1.80	4500	8.18	0.23	1.67	25.7
R125010BH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	30.1
R125010BU	12	7~13.2	0.32	3.84	6500	11.82	0.33	3.48	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×11MM SERIES

Bearing Type:

EBR

Rated Voltage: 5v H.

12v H.


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 24g

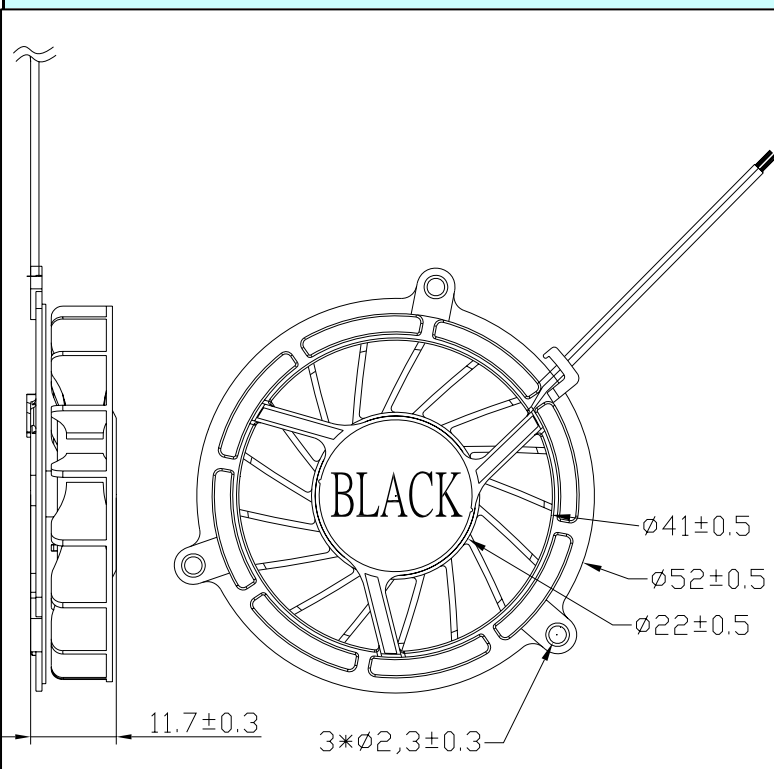

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

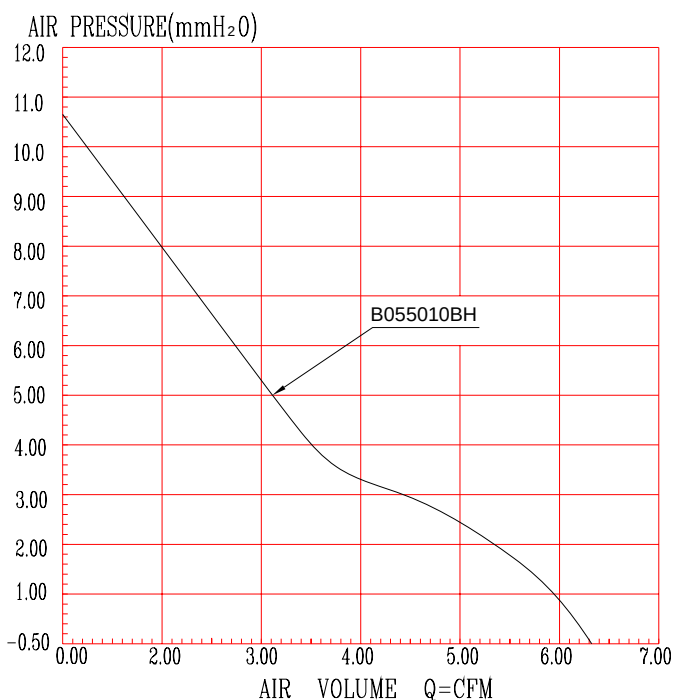

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B055011SH (In Module)	5	4.5~5.5	0.30	1.50	4000	6.33	0.18	10.66	31
B055011SH (In Module)	5	4.5~5.5	0.40	2.00	3500	6.13	0.17	8.87	29.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 30g

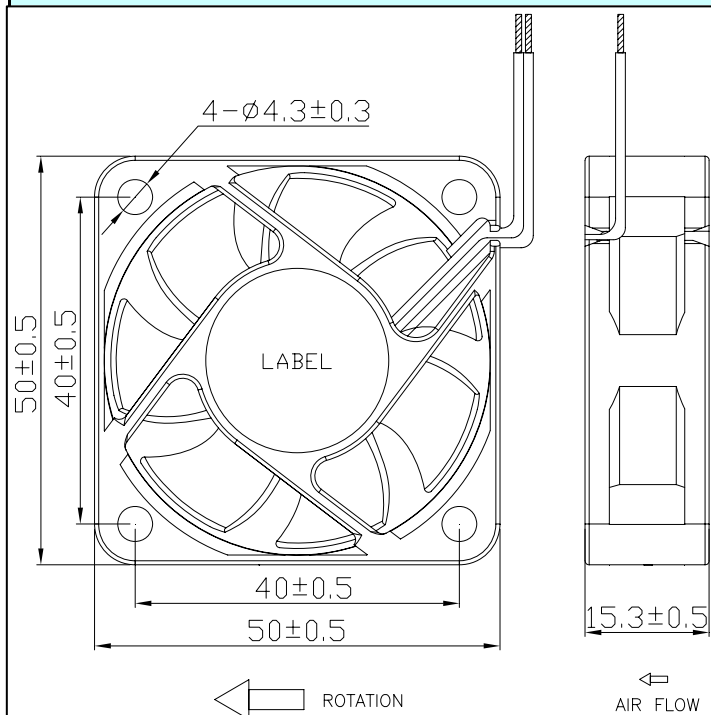

AIR FLOW-AIR PRESSURE PERFORMANCE CURVES

AIR PRESSURE(mmH₂O)

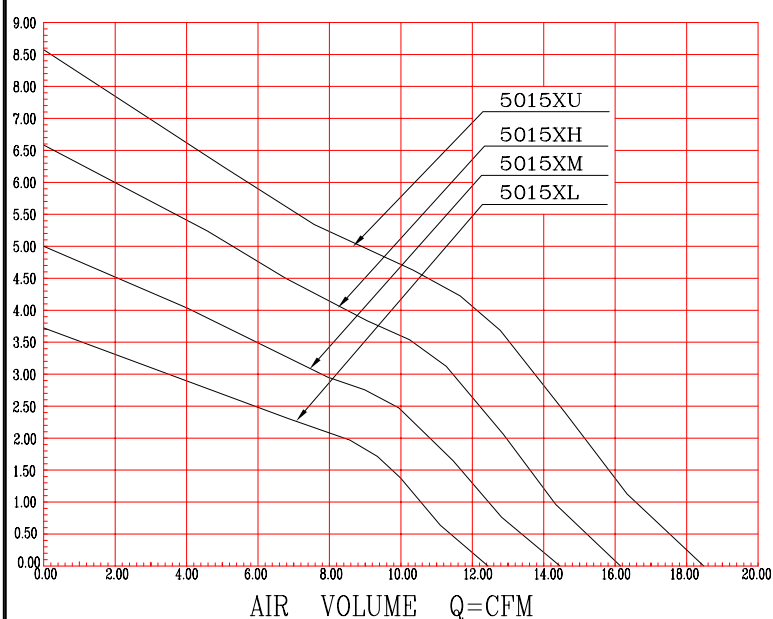

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125015DL	12	7~13.2	0.20	2.40	5000	12.42	0.35	3.72	26.5
R125015DM	12	7~13.2	0.25	3.00	6000	14.42	0.41	5.00	30.2
R125015DH	12	7~13.2	0.32	3.84	7000	16.17	0.46	6.56	35.3
R125015DU	12	7~13.2	0.60	7.20	8000	18.48	0.52	8.56	39.3
R125015SL	12	7~13.2	0.20	2.40	5000	12.42	0.35	3.72	26.5
R125015SM	12	7~13.2	0.25	3.00	6000	14.42	0.41	5.00	30.2
R125015SH	12	7~13.2	0.32	3.84	7000	16.17	0.46	6.56	35.3
R125015SU	12	7~13.2	0.60	7.20	8000	18.48	0.52	8.56	39.3
R125015BL	12	7~13.2	0.20	2.40	5000	12.42	0.35	3.72	26.5
R125015BM	12	7~13.2	0.25	3.00	6000	14.42	0.41	5.00	30.2
R125015BH	12	7~13.2	0.32	3.84	7000	16.17	0.46	6.56	35.3
R125015BU	12	7~13.2	0.60	7.20	8000	18.48	0.52	8.56	39.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

50×50×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 28g

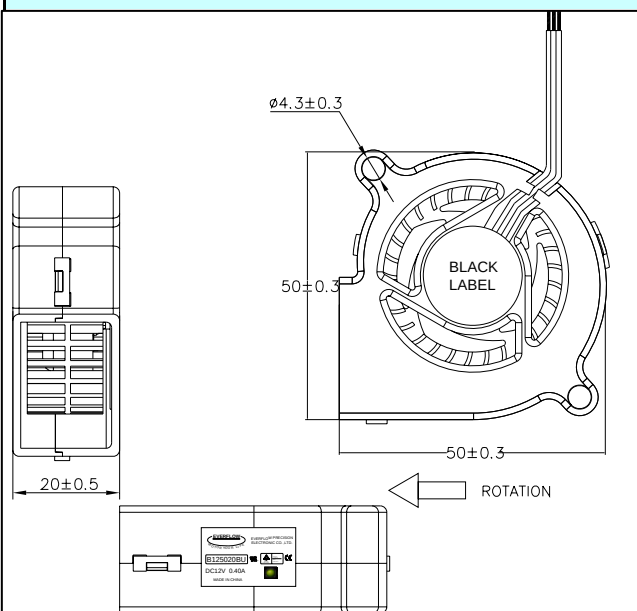

IR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

STATIC PRESSURE (mmH₂O)

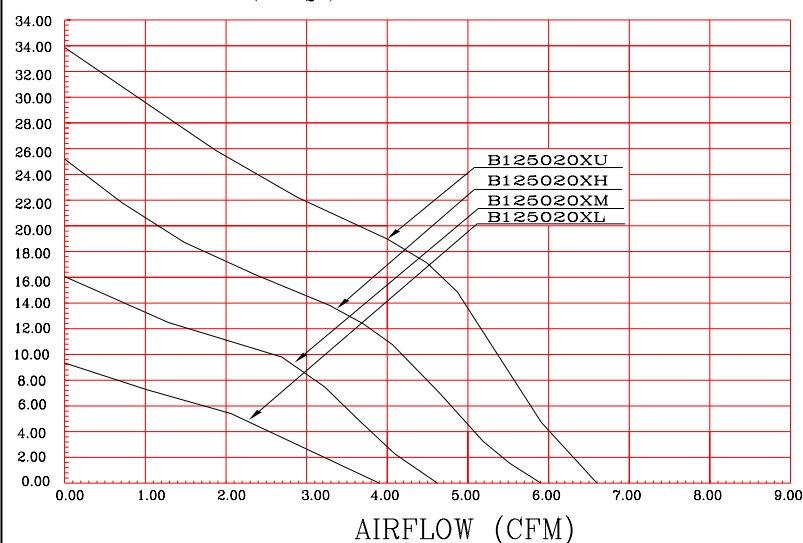

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
BB5020BL	12	7~13.2	0.12	1.44	3800	3.90	0.11	9.48	28
BB5020BM	12	7~13.2	0.20	2.40	4800	4.63	0.13	16.10	32
BB5020BH	12	7~13.2	0.30	3.60	5800	5.92	0.17	25.10	37
BB5020BU	12	7~13.2	0.40	4.80	6800	6.60	0.19	33.80	40
BB5020SL	12	7~13.2	0.12	1.44	3800	3.90	0.11	9.48	28
BB5020SM	12	7~13.2	0.20	2.40	4800	4.63	0.13	16.10	32
BB5020SH	12	7~13.2	0.30	3.60	5800	5.92	0.17	25.10	37
BB5020SU	12	7~13.2	0.40	4.80	6800	6.60	0.19	33.80	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

50×50×20MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage:

12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 33g

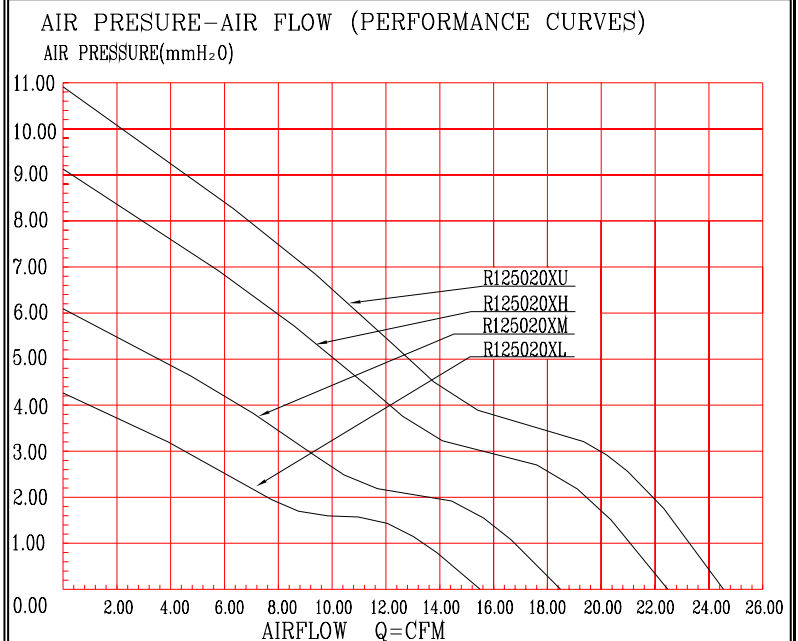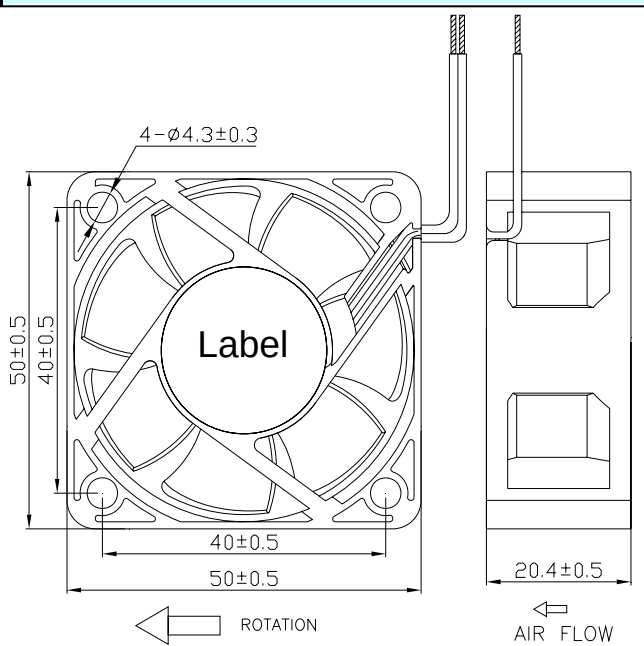

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125020BL	12	7~13.2	0.20	2.4	5000	15.48	0.44	4.25	29
R125020BM	12	7~13.2	0.35	4.2	6000	18.49	0.52	6.12	33.2
R125020BH	12	7~13.2	0.55	6.6	7000	22.59	0.64	9.15	37.2
R125020BU	12	7~13.2	0.70	8.4	8000	24.68	0.70	10.90	42.8
R125020DL	12	7~13.2	0.20	2.4	5000	15.48	0.44	4.25	29
R125020DM	12	7~13.2	0.35	4.2	6000	18.49	0.52	6.12	33.2
R125020DH	12	7~13.2	0.55	6.6	7000	22.59	0.64	9.15	37.2
R125020DU	12	7~13.2	0.70	8.4	8000	24.68	0.70	10.90	42.8
R125020SL	12	7~13.2	0.20	2.4	5000	15.48	0.44	4.25	29
R125020SM	12	7~13.2	0.35	4.2	6000	18.49	0.52	6.12	33.2
R125020SH	12	7~13.2	0.55	6.6	7000	22.59	0.64	9.15	37.2
R125020SU	12	7~13.2	0.70	8.4	8000	24.68	0.70	10.90	42.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 14g

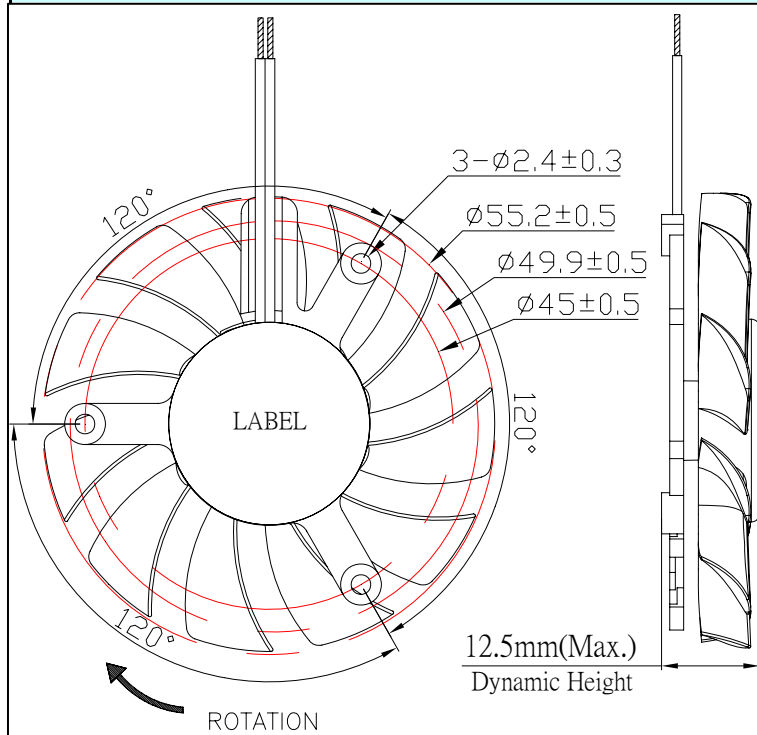

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

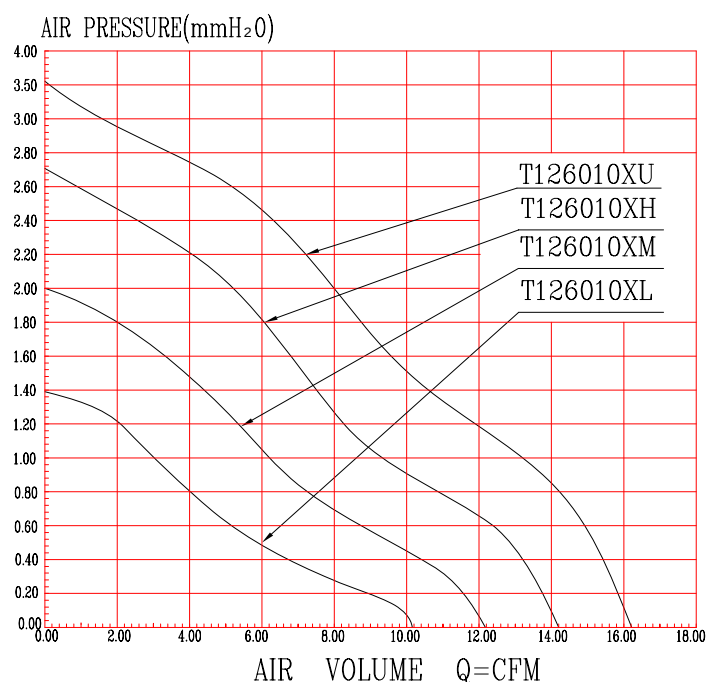

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure	Sound level
								(mmH2O)	dB(A)
T126010BL	12	7~13.2	0.10	1.20	3000	10.14	0.29	1.39	26
T126010BM	12	7~13.2	0.14	1.68	3600	12.17	0.34	2.0	30
T126010BH	12	7~13.2	0.20	2.40	4200	14.20	0.40	2.72	35
T126010BU	12	7~13.2	0.25	3.00	4800	16.23	0.46	3.55	39
T126010DL	12	7~13.2	0.10	1.20	3000	10.14	0.29	1.39	26
T126010DM	12	7~13.2	0.16	1.92	3600	12.17	0.34	2.0	30
T126010DH	12	7~13.2	0.20	2.40	4200	14.20	0.40	2.72	35
T126010DU	12	7~13.2	0.25	3.00	4800	16.23	0.46	3.55	39
T126010SL	12	7~13.2	0.10	1.20	3000	10.14	0.29	1.39	26
T126010SM	12	7~13.2	0.14	1.68	3600	12.17	0.34	2.0	30
T126010SH	12	7~13.2	0.18	2.16	4200	14.20	0.40	2.72	35
T126010SU	12	7~13.2	0.25	3.00	4800	16.23	0.46	3.55	39

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 15g

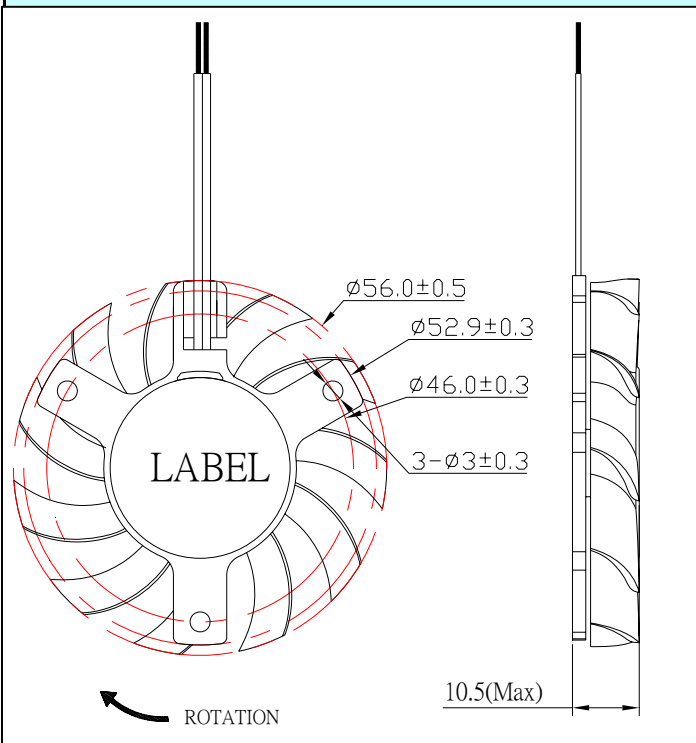

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

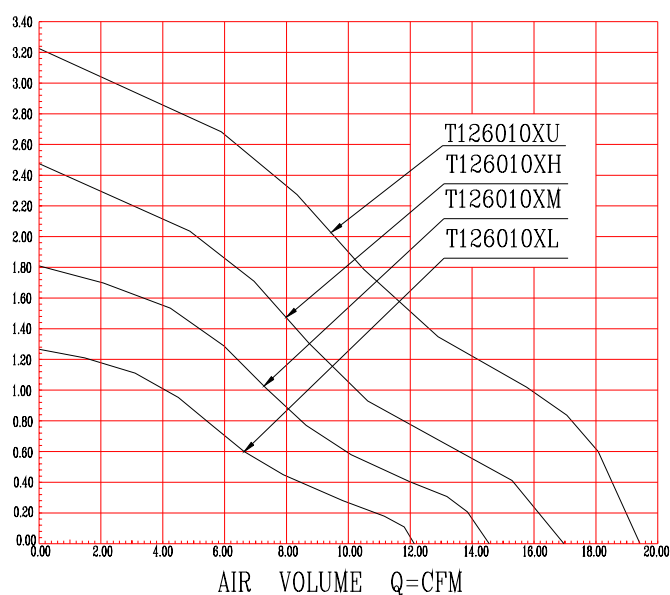

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T126010BL	12	7~13.2	0.10	1.20	3000	12.13	0.34	1.26	22.9
T126010BM	12	7~13.2	0.14	1.68	3600	14.55	0.41	1.81	27.7
T126010BH	12	7~13.2	0.20	2.40	4200	16.98	0.48	2.47	31.2
T126010BU	12	7~13.2	0.25	3.00	4800	19.41	0.55	3.23	37
T126010DL	12	7~13.2	0.10	1.20	3000	12.13	0.34	1.26	22.9
T126010DM	12	7~13.2	0.16	1.92	3600	14.55	0.41	1.81	27.7
T126010DH	12	7~13.2	0.20	2.40	4200	16.98	0.48	2.47	31.2
T126010DU	12	7~13.2	0.25	3.00	4800	19.41	0.55	3.23	37
T126010SL	12	7~13.2	0.10	1.20	3000	12.13	0.34	1.26	22.9
T126010SM	12	7~13.2	0.14	1.68	3600	14.55	0.41	1.81	27.7
T126010SH	12	7~13.2	0.18	2.16	4200	16.98	0.48	2.47	31.2
T126010SU	12	7~13.2	0.25	3.00	4800	19.41	0.55	3.23	37

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 30g

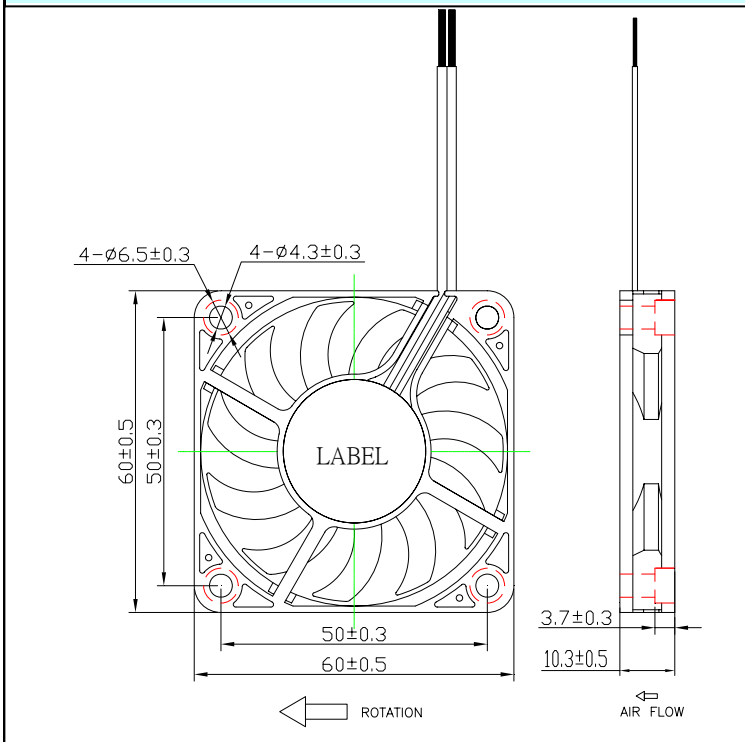

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

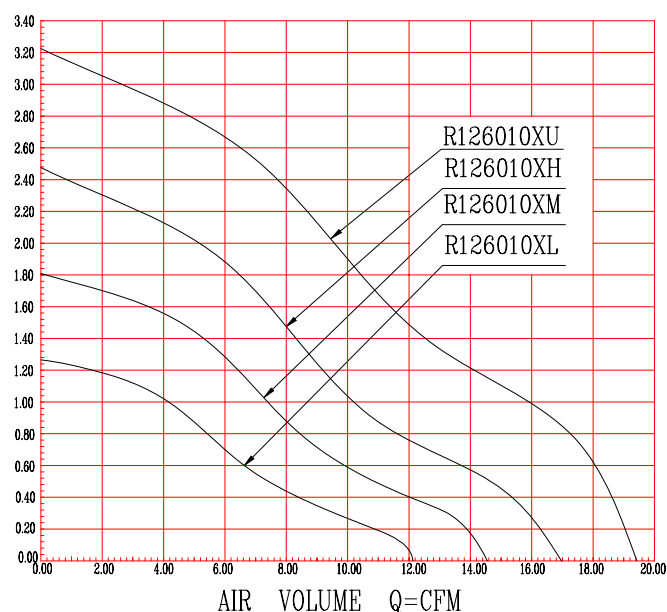

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126010BL	12	7~13.2	0.10	1.20	3000	12.13	0.34	1.26	22.9
R126010BM	12	7~13.2	0.14	1.68	3600	14.55	0.41	1.81	27.7
R126010BH	12	7~13.2	0.20	2.40	4200	16.98	0.48	2.47	31.2
R126010BU	12	7~13.2	0.25	3.00	4800	19.41	0.55	3.23	37
R126010DL	12	7~13.2	0.10	1.20	3000	12.13	0.34	1.26	22.9
R126010DM	12	7~13.2	0.16	1.92	3600	14.55	0.41	1.81	27.7
R126010DH	12	7~13.2	0.20	2.40	4200	16.98	0.48	2.47	31.2
R126010DU	12	7~13.2	0.25	3.00	4800	19.41	0.55	3.23	37
R126010SL	12	7~13.2	0.10	1.20	3000	12.13	0.34	1.26	22.9
R126010SM	12	7~13.2	0.14	1.68	3600	14.55	0.41	1.81	27.7
R126010SH	12	7~13.2	0.18	2.16	4200	16.98	0.48	2.47	31.2
R126010SU	12	7~13.2	0.25	3.00	4800	19.41	0.55	3.23	37

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

60×60×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 40g

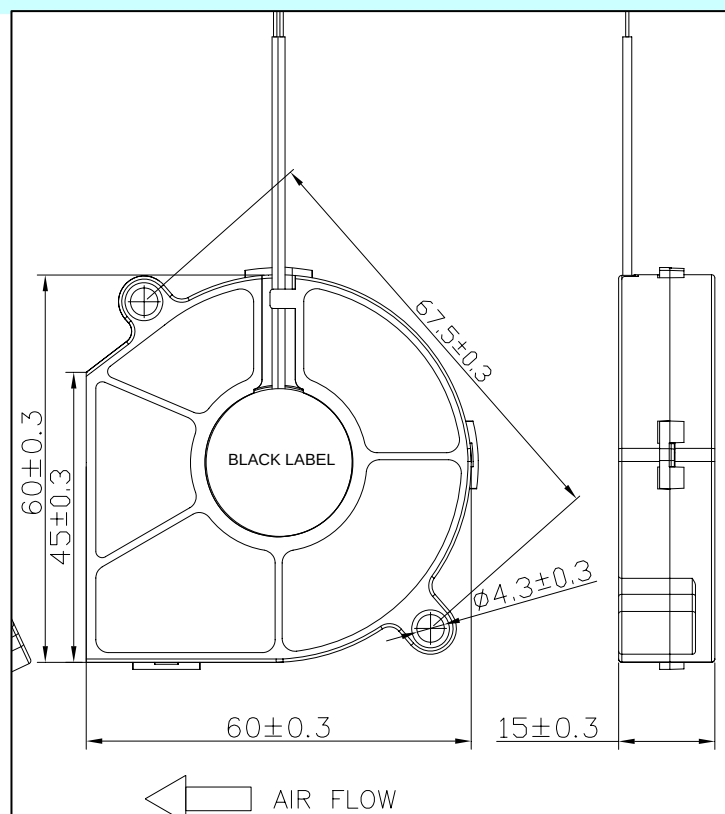

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

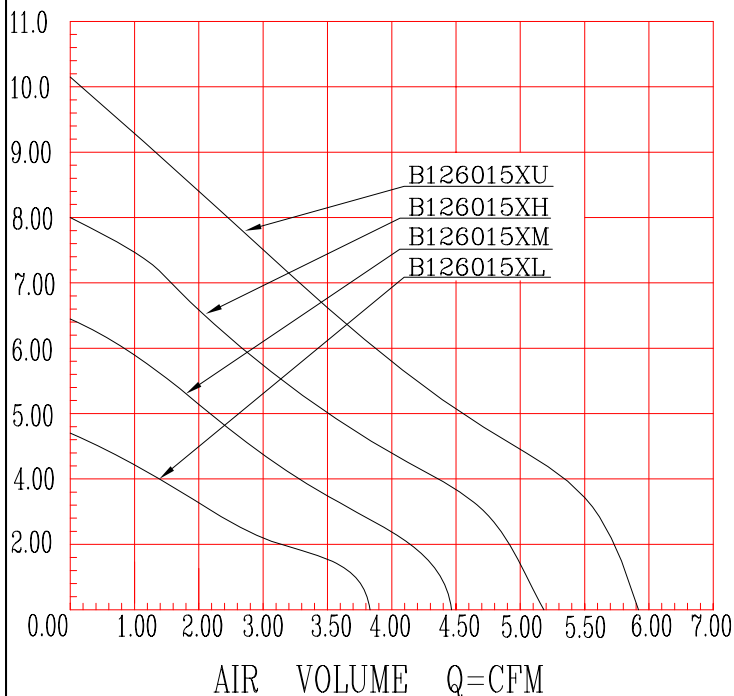

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B126015BL	12	7~13.2	0.14	1.68	3600	3.83	0.11	4.71	33.4
B126015BM	12	7~13.2	0.20	2.40	4200	4.47	0.13	6.41	38
B126015BH	12	7~13.2	0.30	3.60	4800	5.18	0.15	8.02	42.1
B126015BU	12	7~13.2	0.40	4.80	5400	5.83	0.17	10.15	45.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

60×60×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 40g

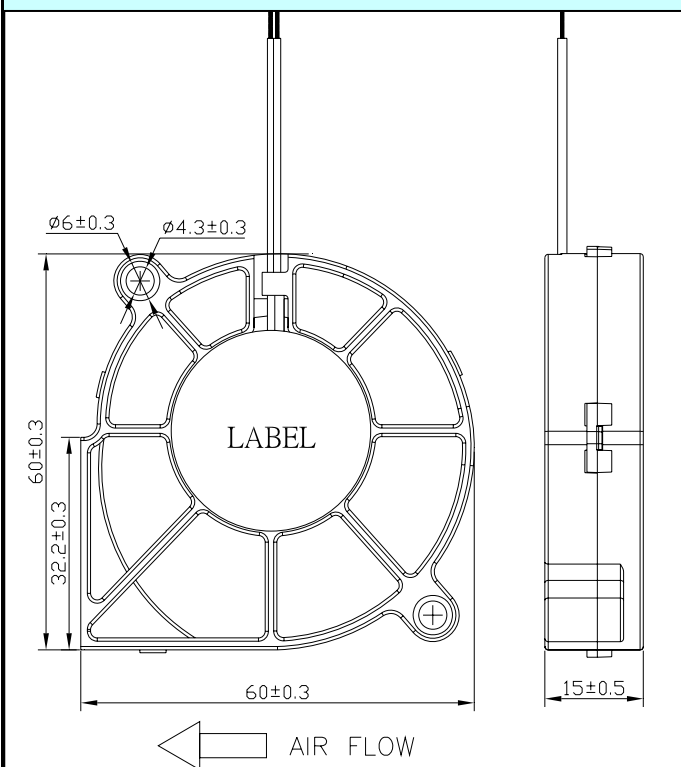

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

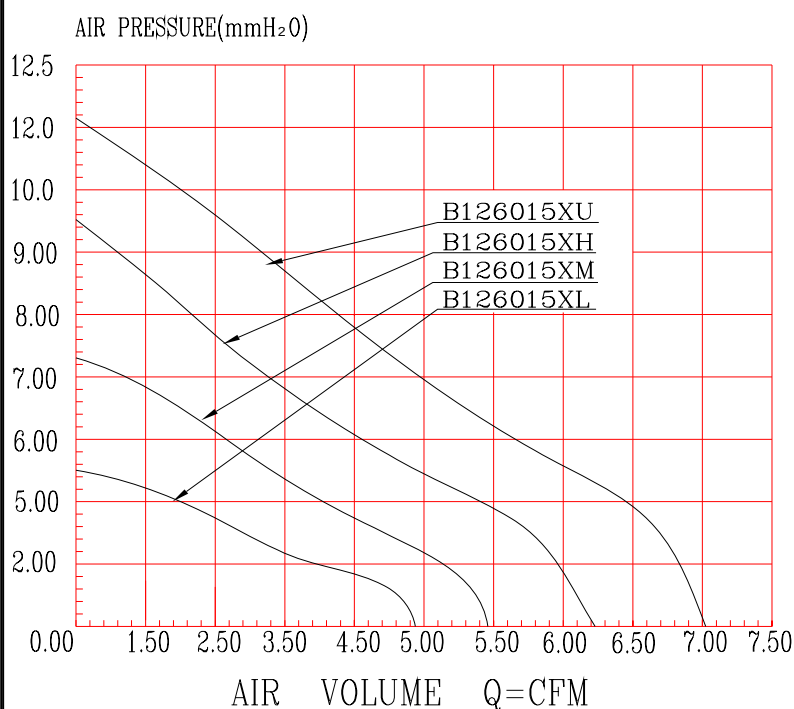

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B126015BL	12	7~13.2	0.14	1.68	3600	4.92	0.14	5.24	34.7
B126015BM	12	7~13.2	0.20	2.40	4200	5.45	0.15	7.30	37.8
B126015BH	12	7~13.2	0.30	3.60	4800	6.23	0.18	9.54	41.8
B126015BU	12	7~13.2	0.40	4.80	5400	7.01	0.20	12.07	44.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 40g

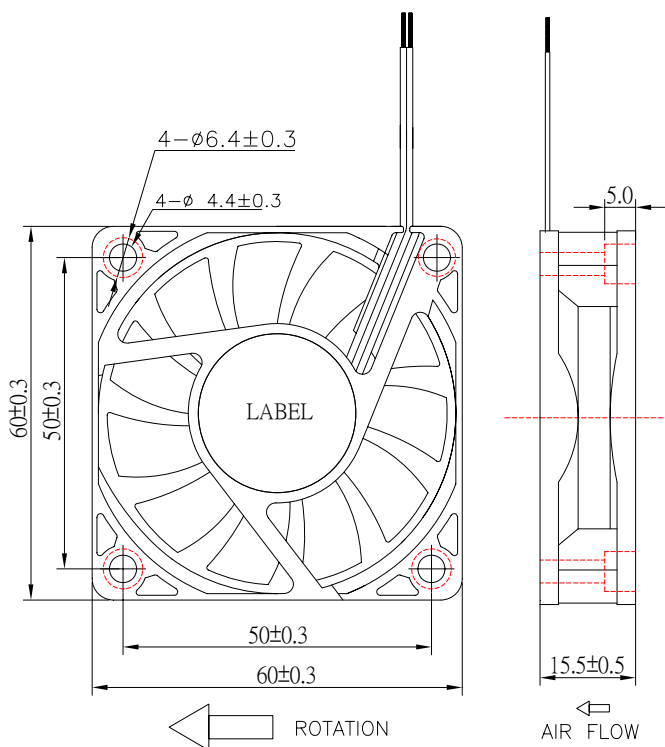

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

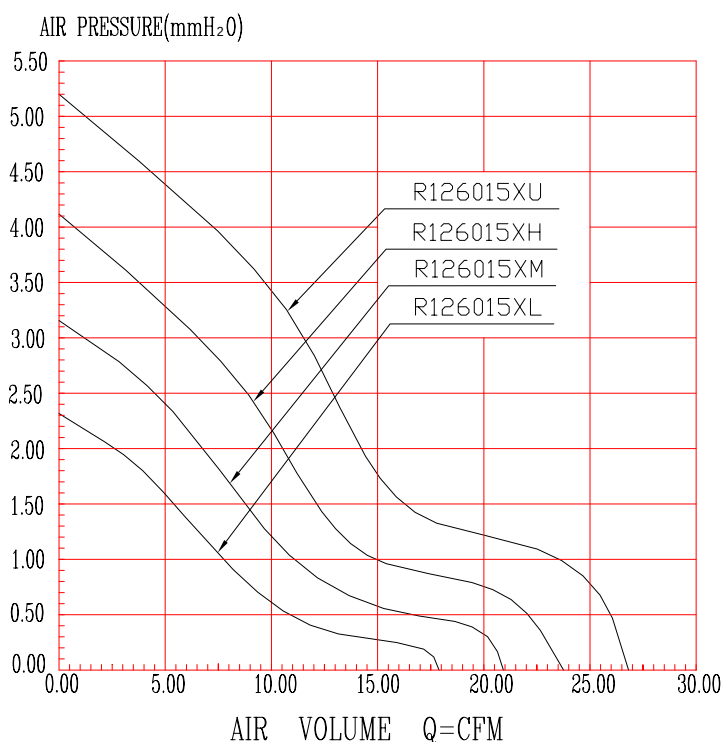

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126015BL	12	7~13.2	0.14	1.68	3600	17.89	0.51	2.31	26.9
R126015BM	12	7~13.2	0.20	2.40	4200	20.87	0.59	3.15	30.8
R126015BH	12	7~13.2	0.30	3.60	4800	23.85	0.68	4.11	33.9
R126015BU	12	7~13.2	0.40	4.80	5400	26.83	0.76	5.20	37
R126015DL	12	7~13.2	0.14	1.68	3600	17.89	0.51	2.31	26.9
R126015DM	12	7~13.2	0.20	2.40	4200	20.87	0.59	3.15	30.8
R126015DH	12	7~13.2	0.30	3.60	4800	23.85	0.68	4.11	33.9
R126015DU	12	7~13.2	0.40	4.80	5400	26.83	0.76	5.20	37
R126015SL	12	7~13.2	0.14	1.68	3600	17.89	0.51	2.31	26.9
R126015SM	12	7~13.2	0.20	2.40	4200	20.87	0.59	3.15	30.8
R126015SH	12	7~13.2	0.30	3.60	4800	23.85	0.68	4.11	33.9
R126015SU	12	7~13.2	0.40	4.80	5400	26.83	0.76	5.20	37

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×20MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage

12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 57g

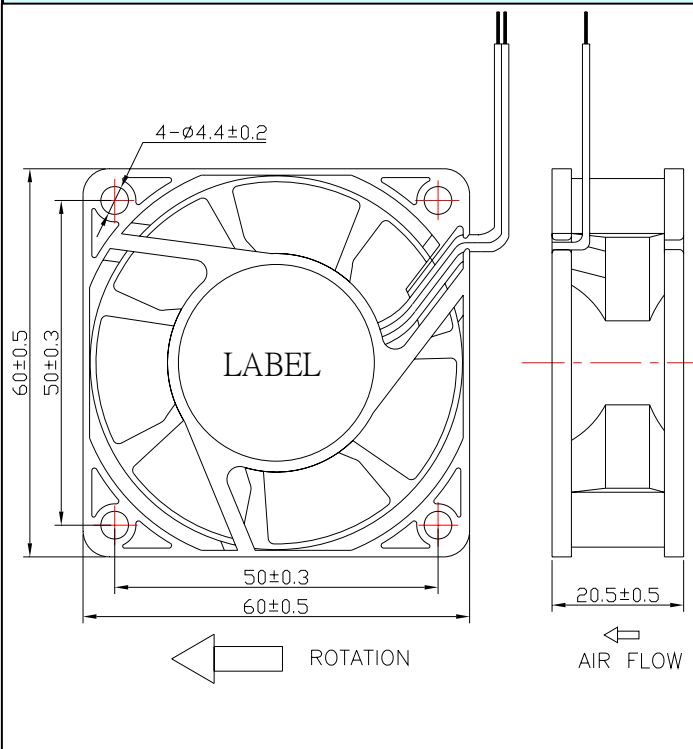

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

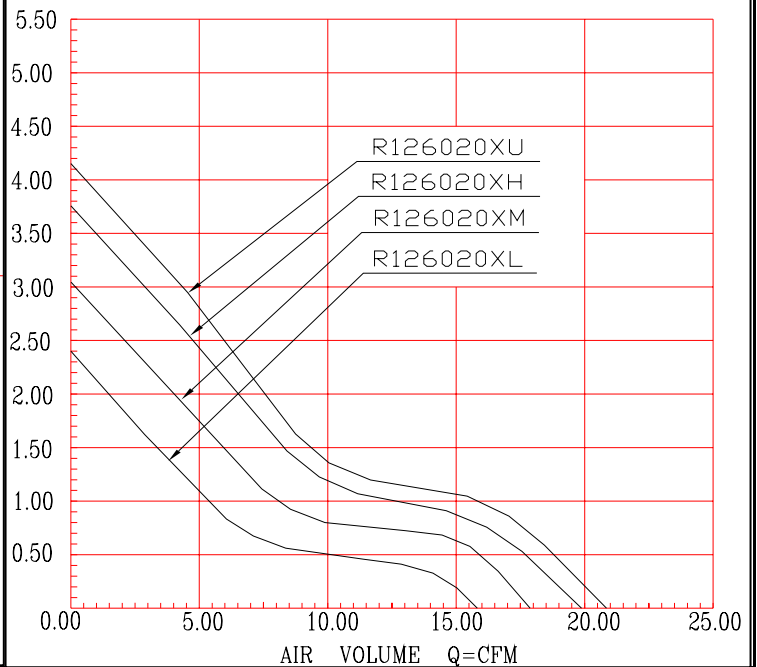

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126020BL	12	7~13.2	0.09	1.08	3200	15.87	0.45	2.40	26.5
R126020BM	12	7~13.2	0.12	1.44	3600	17.85	0.51	3.04	28.1
R126020BH	12	7~13.2	0.15	1.80	4000	19.84	0.56	3.76	30
R126020BU	12	7~13.2	0.20	2.40	4400	21.83	0.62	4.55	32.5
R126020DL	12	7~13.2	0.09	1.08	3200	15.87	0.45	2.40	26.5
R126020DM	12	7~13.2	0.12	1.44	3600	17.85	0.51	3.04	28.1
R126020DH	12	7~13.2	0.15	1.80	4000	19.84	0.56	3.76	30
R126020DU	12	7~13.2	0.20	2.40	4400	21.83	0.62	4.55	32.5
R126020SL	12	7~13.2	0.09	1.08	3200	15.87	0.45	2.40	26.5
R126020SM	12	7~13.2	0.12	1.44	3600	17.85	0.51	3.04	28.1
R126020SH	12	7~13.2	0.15	1.80	4000	19.84	0.56	3.76	30
R126020SU	12	7~13.2	0.20	2.40	4400	21.83	0.62	4.55	32.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×25MM SERIES

Bearing Type: Two ball bearing

EBR

One ball one sleeve bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U 48v U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 50g

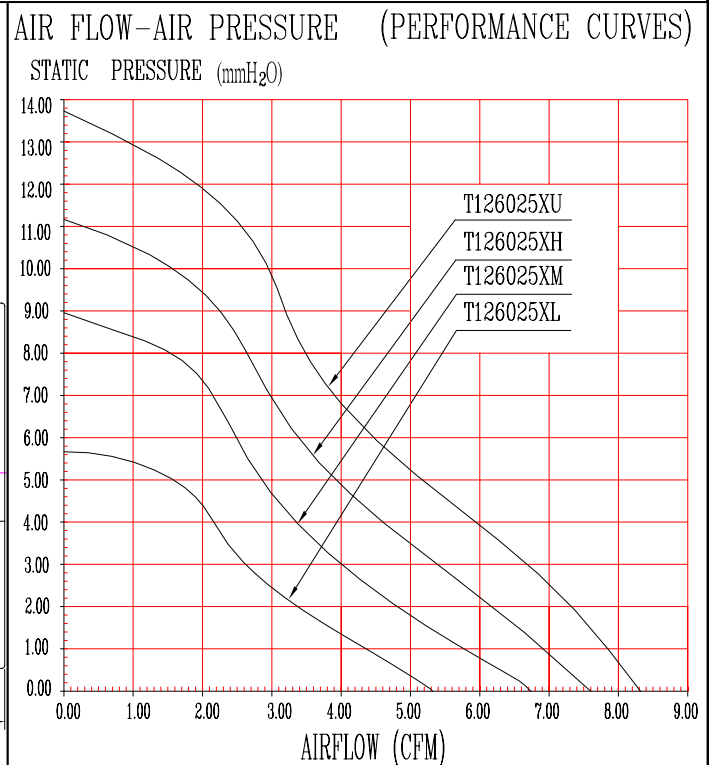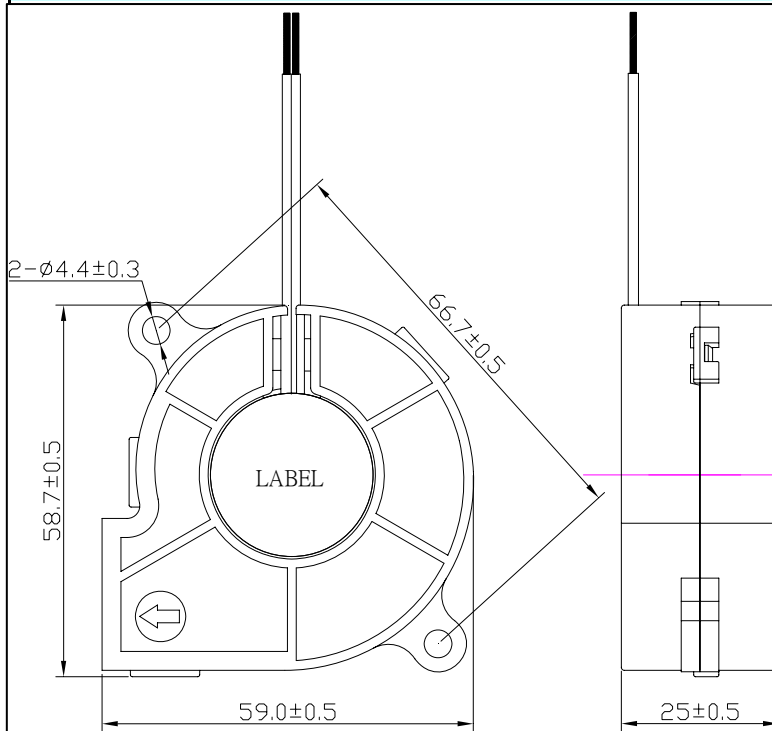

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T126025 BL	12	7~13.2	0.12	1.44	3000	5.31	0.15	5.63	28.7
T126025 BM	12	7~13.2	0.16	1.92	3600	6.71	0.19	8.88	33.7
T126025 BH	12	7~13.2	0.22	2.64	4200	7.60	0.22	11.16	36.6
T126025 BU	12	7~13.2	0.26	3.12	4800	8.32	0.24	13.68	38.5
T126025 DL	12	7~13.2	0.12	1.44	3000	5.31	0.15	5.63	28.7
T126025 DM	12	7~13.2	0.16	1.92	3600	6.71	0.19	8.88	33.7
T126025 DH	12	7~13.2	0.22	2.64	4200	7.60	0.22	11.16	36.6
T126025 DU	12	7~13.2	0.26	3.12	4800	8.32	0.24	13.68	38.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U 48v U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 63g

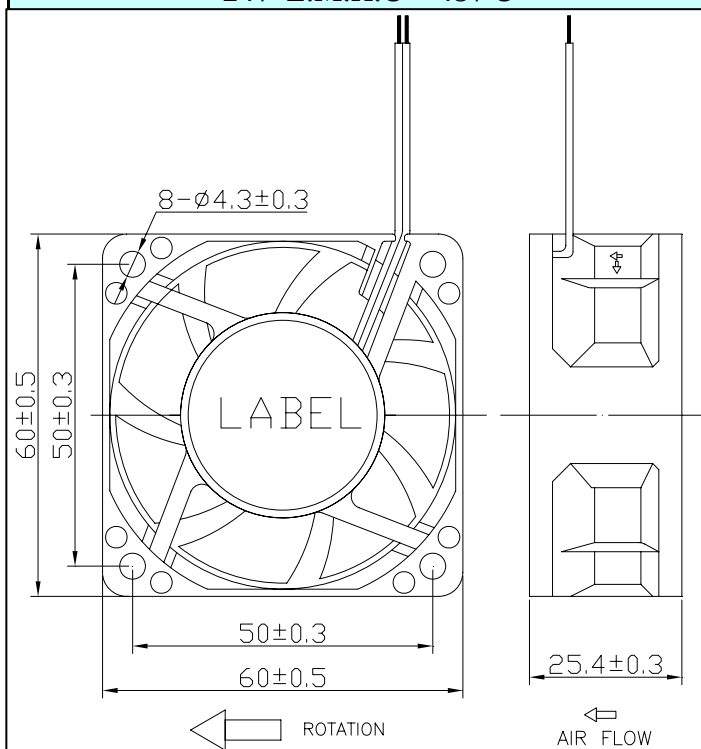

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

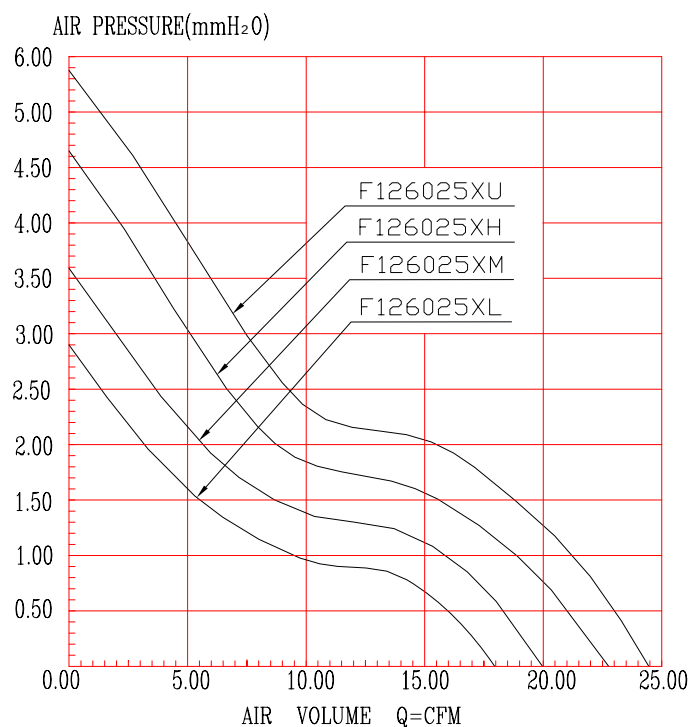

此機種有8孔及4孔基架.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F126025BL	12	7~13.2	0.12	1.44	3600	17.99	0.51	2.90	23.4
F126025BM	12	7~13.2	0.16	1.92	4000	19.99	0.57	3.59	26.9
F126025BH	12	7~13.2	0.22	2.64	4550	22.74	0.64	4.64	30.5
F126025BU	12	7~13.2	0.26	3.12	4900	24.49	0.69	5.38	33.5
F126025DL	12	7~13.2	0.12	1.44	3600	17.99	0.51	2.90	23.4
F126025DM	12	7~13.2	0.16	1.92	4000	19.99	0.57	3.59	26.9
F126025DH	12	7~13.2	0.22	2.64	4550	22.74	0.64	4.64	30.5
F126025DU	12	7~13.2	0.26	3.12	4900	24.49	0.69	5.38	33.5
F126025SL	12	7~13.2	0.12	1.44	3600	17.99	0.51	2.90	23.4
F126025SM	12	7~13.2	0.16	1.92	4000	19.99	0.57	3.59	26.9
F126025SH	12	7~13.2	0.22	2.64	4550	22.74	0.64	4.64	30.5
F126025SU	12	7~13.2	0.26	3.12	4900	24.49	0.69	5.38	33.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U 48v U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 50g

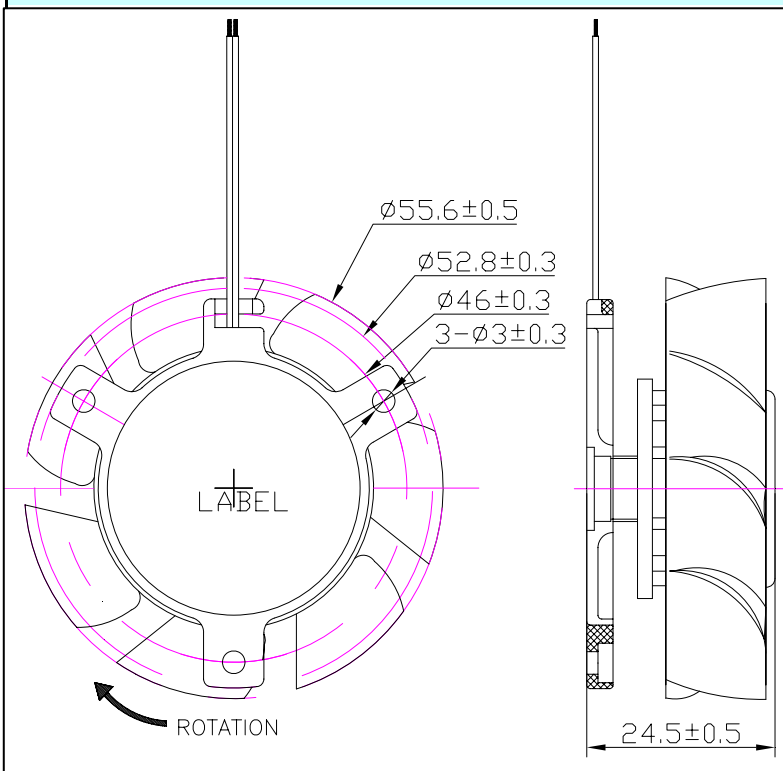

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

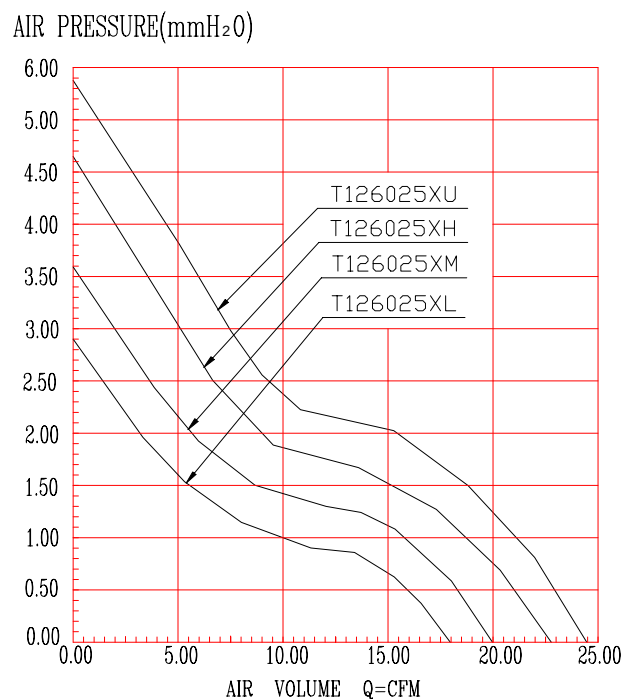

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T126025BL	12	7~13.2	0.12	1.44	3600	17.99	0.51	2.90	23.4
T126025BM	12	7~13.2	0.16	1.92	4000	19.99	0.57	3.59	26.9
T126025BH	12	7~13.2	0.22	2.64	4550	22.74	0.64	4.64	30.5
T126025BU	12	7~13.2	0.26	3.12	4900	24.49	0.69	5.38	33.5
T126025DL	12	7~13.2	0.12	1.44	3600	17.99	0.51	2.90	23.4
T126025DM	12	7~13.2	0.16	1.92	4000	19.99	0.57	3.59	26.9
T126025DH	12	7~13.2	0.22	2.64	4550	22.74	0.64	4.64	30.5
T126025DU	12	7~13.2	0.26	3.12	4900	24.49	0.69	5.38	33.5
T126025SL	12	7~13.2	0.12	1.44	3600	17.99	0.51	2.90	23.4
T126025SM	12	7~13.2	0.16	1.92	4000	19.99	0.57	3.59	26.9
T126025SH	12	7~13.2	0.22	2.64	4550	22.74	0.64	4.64	30.5
T126025SU	12	7~13.2	0.26	3.12	4900	24.49	0.69	5.38	33.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

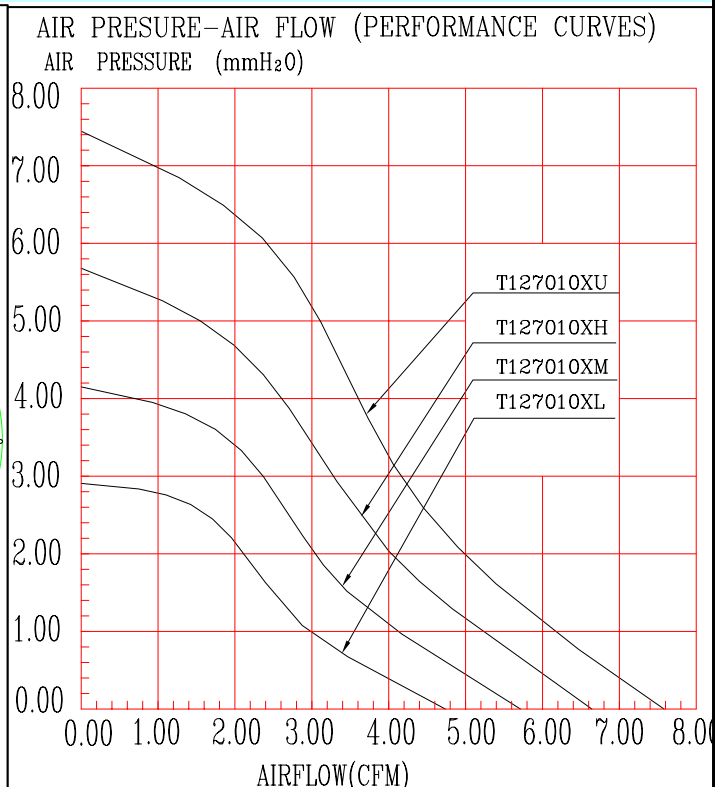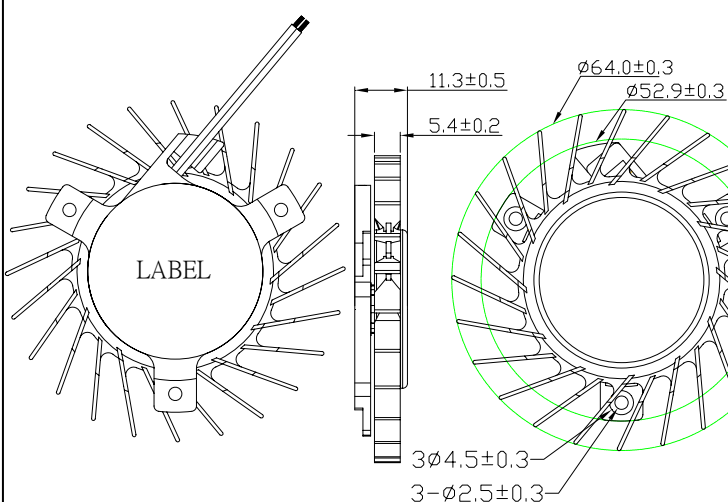

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010BL	12	7~13.2	0.18	2.16	3000	4.74	0.13	2.90	26.7
T127010BM	12	7~13.2	0.25	3.00	3600	5.68	0.16	4.17	31
T127010BH	12	7~13.2	0.35	4.20	4200	6.63	0.19	5.68	40.6
T127010BU	12	7~13.2	0.45	5.40	4800	7.58	0.21	7.42	44.1
T127010DL	12	7~13.2	0.18	2.16	3000	4.74	0.13	2.90	26.7
T127010DM	12	7~13.2	0.25	3.00	3600	5.68	0.16	4.17	31
T127010DH	12	7~13.2	0.35	4.20	4200	6.63	0.19	5.68	40.6
T127010DU	12	7~13.2	0.45	5.40	4800	7.58	0.21	7.42	44.1

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 14g

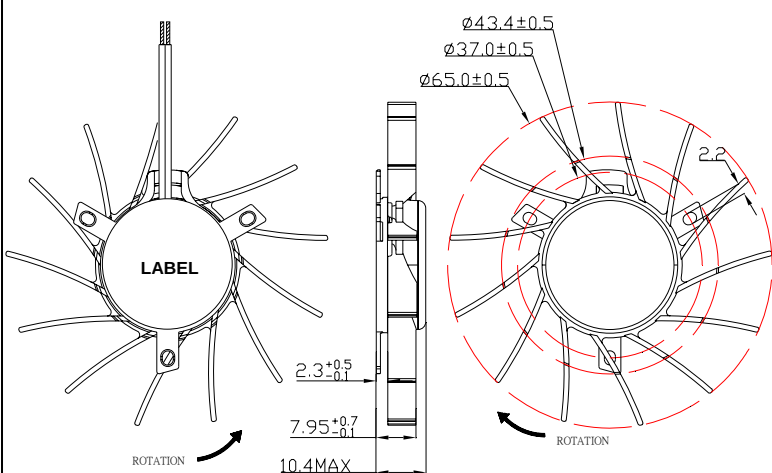

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE (mmH₂O)

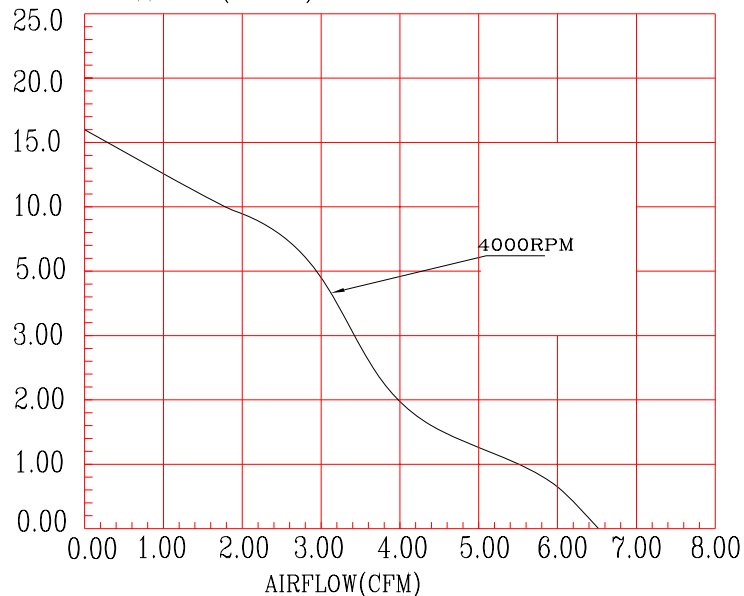

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010*U (IN MODUL)	12	7~13.2	0.45	5.40	3200	6.50	0.18	16	32

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 17g

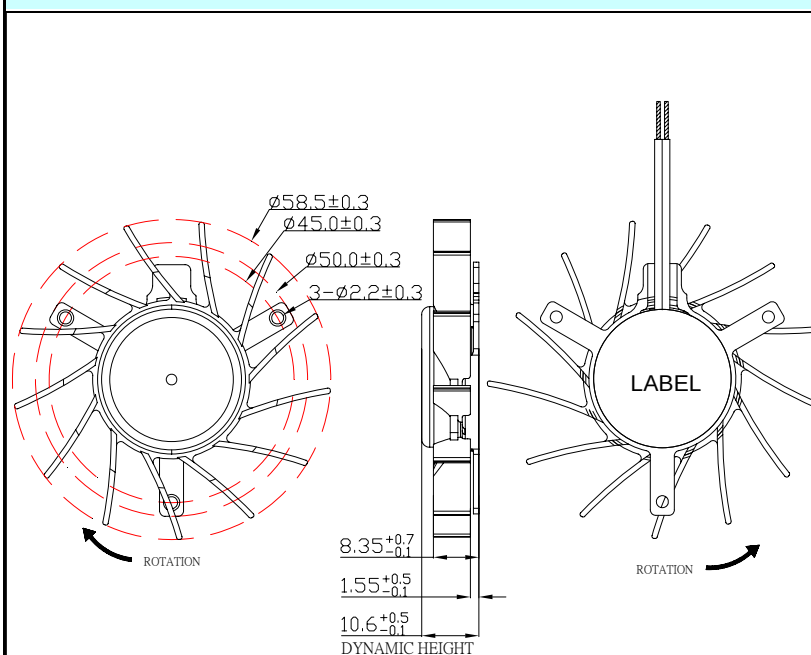

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESURE (mmH₂O)

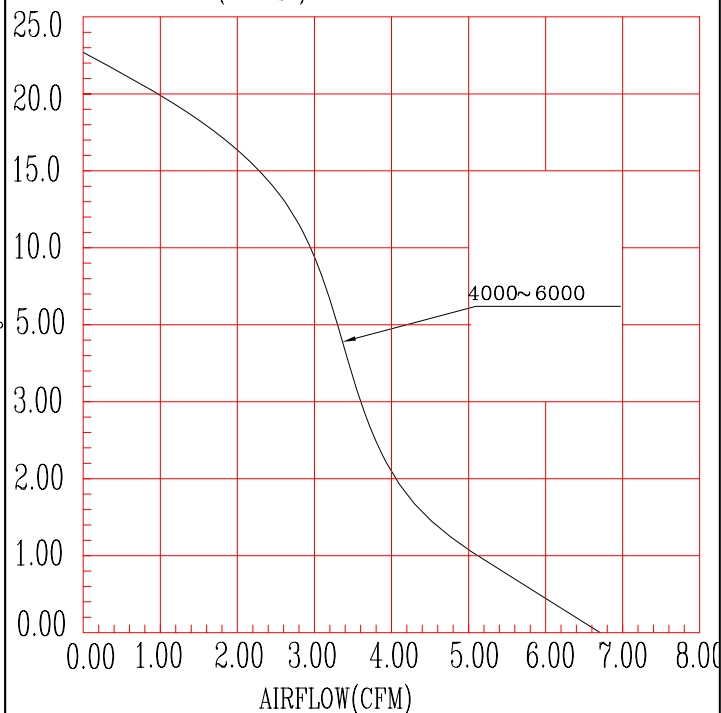

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010*U (IN MODUL)	12	7~13.2	0.45	5.40	4000~4600	5.69	0.16	22.7	32

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

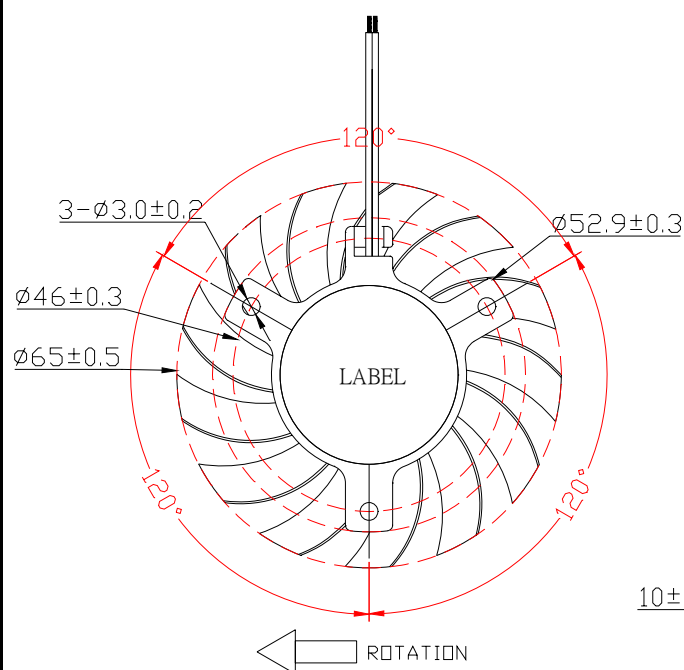

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

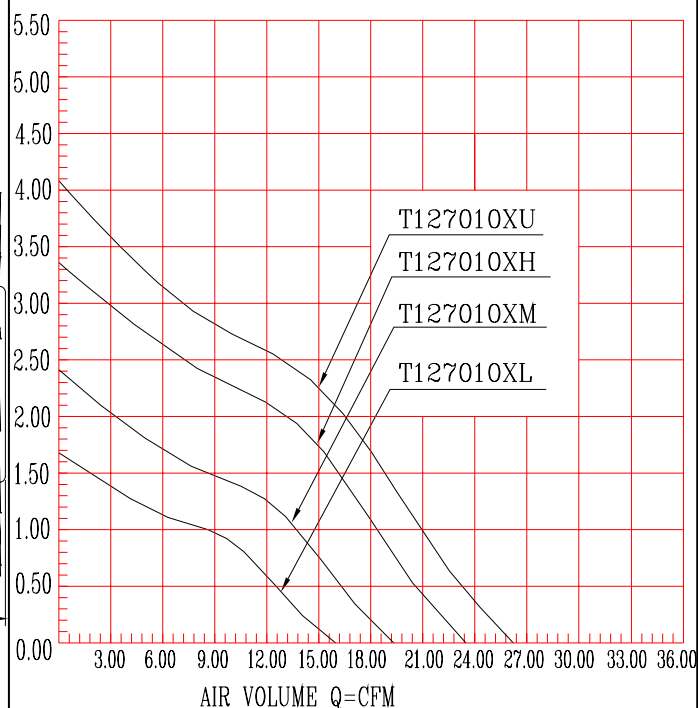

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010BL	12	7~13.2	0.18	2.16	3000	15.93	0.45	1.68	29.8
T127010BM	12	7~13.2	0.25	3.00	3600	19.33	0.55	2.41	34.6
T127010BH	12	7~13.2	0.35	4.20	4200	23.44	0.66	3.36	39.5
T127010BU	12	7~13.2	0.45	5.40	4800	26.26	0.74	4.09	42.4
T127010DL	12	7~13.2	0.18	2.16	3000	15.93	0.45	1.68	29.8
T127010DM	12	7~13.2	0.25	3.00	3600	19.33	0.55	2.41	34.6
T127010DH	12	7~13.2	0.35	4.20	4200	23.44	0.66	3.36	39.5
T127010DU	12	7~13.2	0.45	5.40	4800	26.26	0.74	4.09	42.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

R7010MM SERIES

Bearing Type: Two ball bearing

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 22g

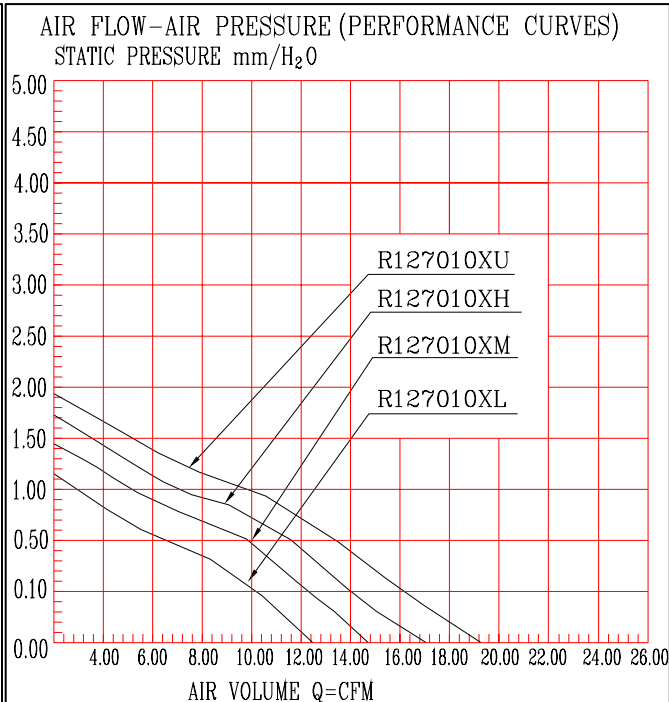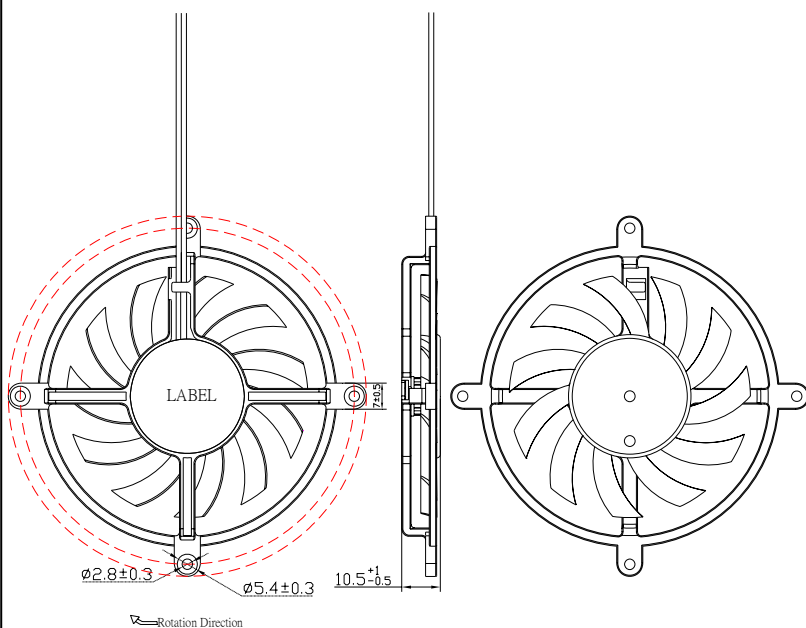

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127010BL	12	7~13.2	0.18	2.16	3000	12.38	0.35	1.16	25.4
R127010BM	12	7~13.2	0.25	3.00	3600	14.79	0.42	1.62	29.2
R127010BH	12	7~13.2	0.35	4.20	4200	17.02	0.48	2.21	31.7
R127010BU	12	7~13.2	0.45	5.40	4800	19.41	0.55	2.81	35.2
R127010DL	12	7~13.2	0.18	2.16	3000	12.38	0.35	1.16	25.4
R127010DM	12	7~13.2	0.25	3.00	3600	14.79	0.42	1.62	29.2
R127010DH	12	7~13.2	0.35	4.20	4200	17.02	0.48	2.21	31.7
R127010DU	12	7~13.2	0.45	5.40	4800	19.41	0.55	2.81	35.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type:

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 20g

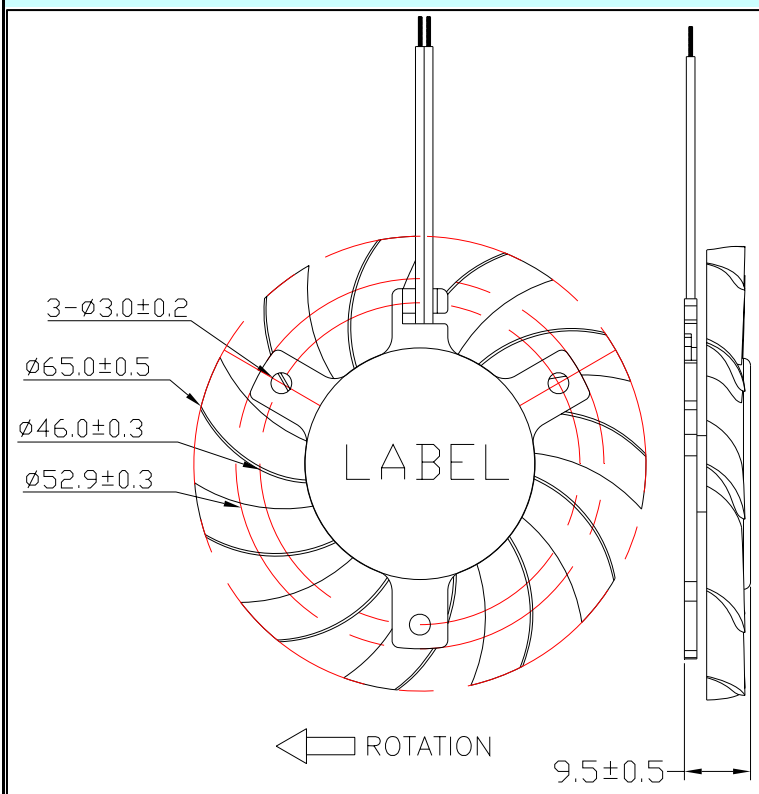

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

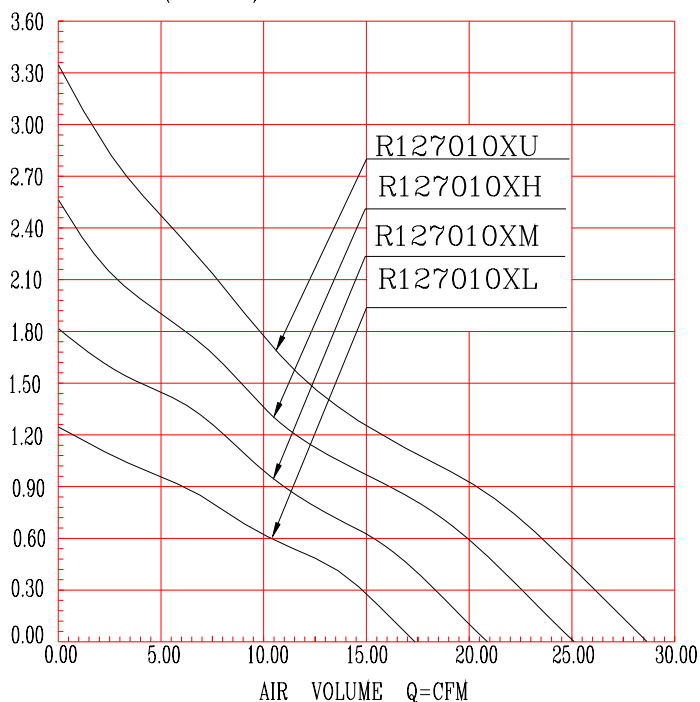

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010BL	12	7~13.2	0.18	2.16	3000	17.41	0.49	1.25	27.3
T127010BM	12	7~13.2	0.25	3.00	3600	20.89	0.59	1.81	31.1
T127010BH	12	7~13.2	0.35	4.20	4200	25.15	0.71	2.56	36.7
T127010BU	12	7~13.2	0.45	5.40	4800	28.74	0.81	3.34	40.3
T127010DL	12	7~13.2	0.18	2.16	3000	17.41	0.49	1.25	27.3
T127010DM	12	7~13.2	0.25	3.00	3600	20.89	0.59	1.81	31.1
T127010DH	12	7~13.2	0.35	4.20	4200	25.15	0.71	2.56	36.7
T127010DU	12	7~13.2	0.45	5.40	4800	28.74	0.81	3.34	40.3
T127010SL	12	7~13.2	0.18	2.16	3000	17.41	0.49	1.25	27.3
T127010SM	12	7~13.2	0.25	3.00	3600	20.89	0.59	1.81	31.1
T127010SH	12	7~13.2	0.35	4.20	4200	25.15	0.71	2.56	36.7
T127010SU	12	7~13.2	0.45	5.40	4800	28.74	0.81	3.34	40.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 17g

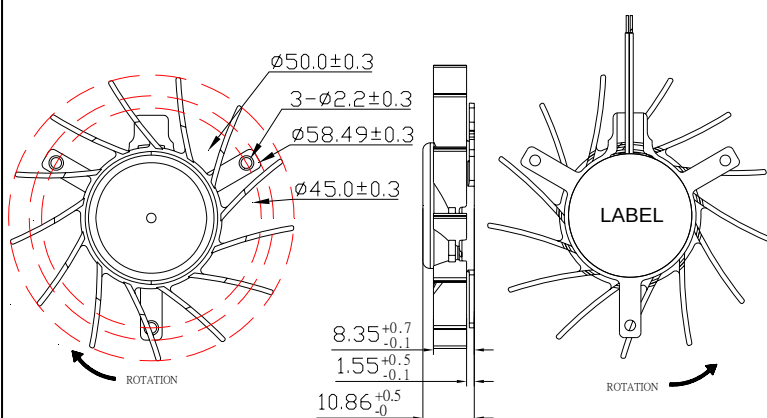

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

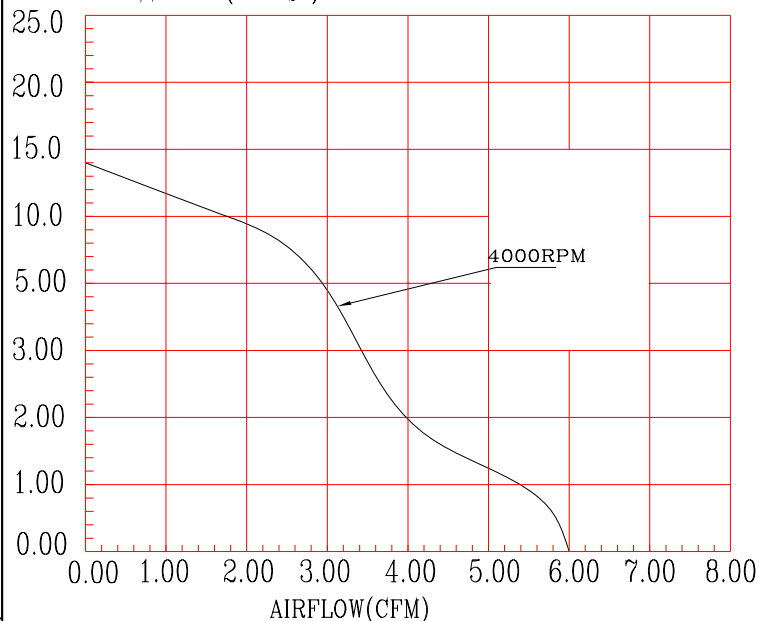

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010SU (IN MODUL)	12	7~13.2	0.45	5.40	4000	6.00	0.17	14	32.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 35g

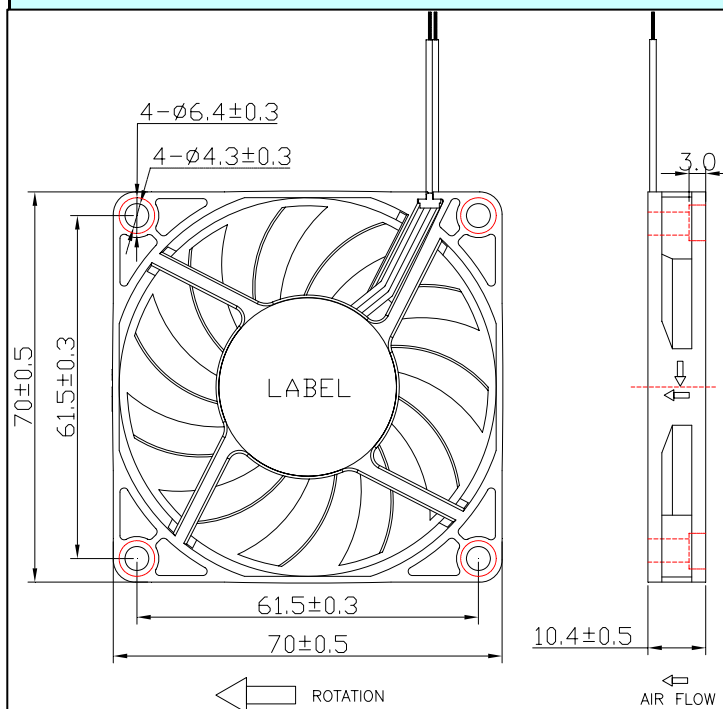

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

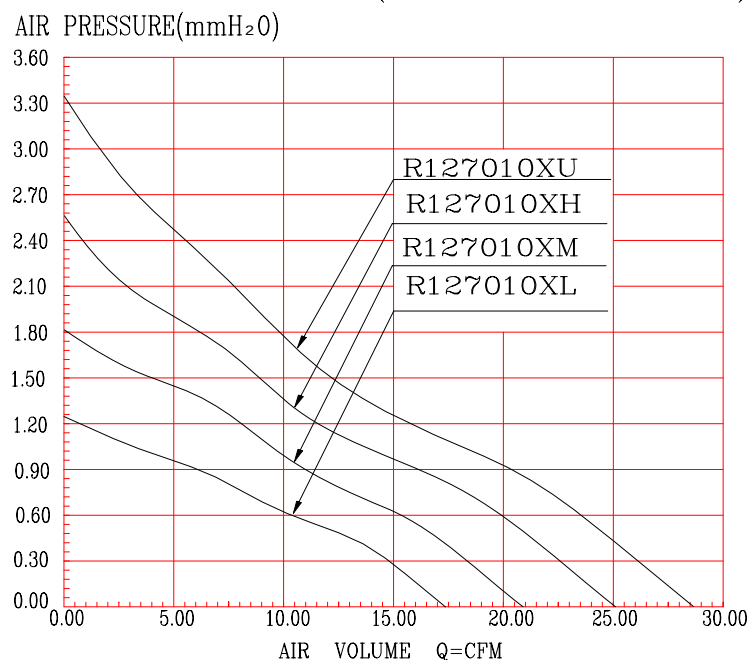

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127010BL	12	7~13.2	0.18	2.16	3000	17.41	0.49	1.25	27.3
R127010BM	12	7~13.2	0.25	3.00	3600	20.89	0.59	1.81	31.1
R127010BH	12	7~13.2	0.35	4.20	4200	25.15	0.71	2.56	36.7
R127010BU	12	7~13.2	0.45	5.40	4800	28.74	0.81	3.34	40.3
R127010DL	12	7~13.2	0.18	2.16	3000	17.41	0.49	1.25	27.3
R127010DM	12	7~13.2	0.25	3.00	3600	20.89	0.59	1.81	31.1
R127010DH	12	7~13.2	0.35	4.20	4200	25.15	0.71	2.56	36.7
R127010DU	12	7~13.2	0.45	5.40	4800	28.74	0.81	3.34	40.3
R127010SL	12	7~13.2	0.18	2.16	3000	17.41	0.49	1.25	27.3
R127010SM	12	7~13.2	0.25	3.00	3600	20.89	0.59	1.81	31.1
R127010SH	12	7~13.2	0.35	4.20	4200	25.15	0.71	2.56	36.7
R127010SU	12	7~13.2	0.45	5.40	4800	28.74	0.81	3.34	40.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×13MM SERIES Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

Impeller Plastic (UL : 94V-0)

EBR


Protection : Auto-Restart /Impedance

One ball one sleeve bearing


Operating Temp : ~10~70°C

Rated Voltage: 12v L.M.H.U

Weight : 42g

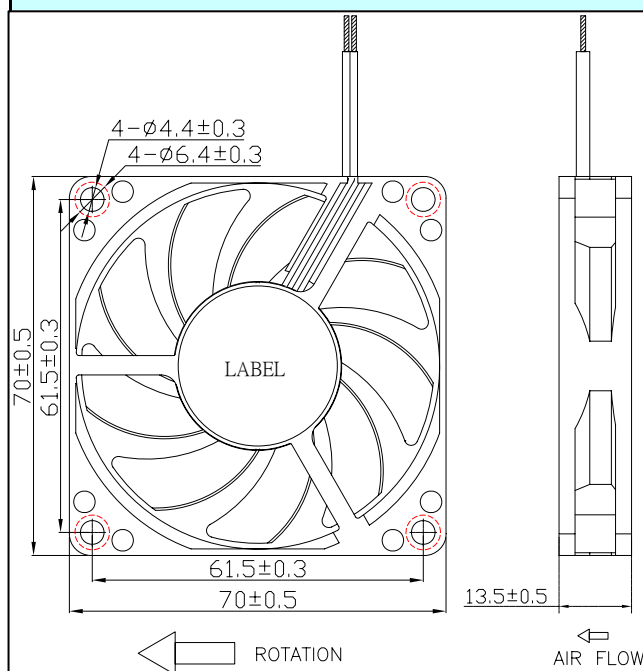

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

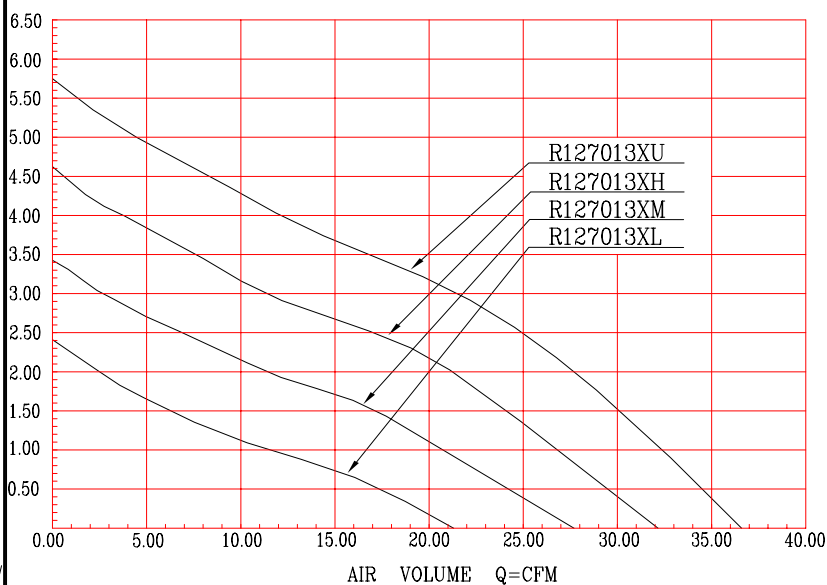

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015DL	12	7~13.2	0.25	3.00	3000	22.12	0.63	2.41	28.9
R127015DM	12	7~13.2	0.28	3.36	3600	27.07	0.77	3.42	32.4
R127015DH	12	7~13.2	0.30	3.60	4200	32.01	0.91	4.62	37.9
R127015DU	12	7~13.2	0.35	4.20	4800	36.54	1.04	5.75	42.1
R127015SL	12	7~13.2	0.25	3.00	3000	22.12	0.63	2.41	28.9
R127015SM	12	7~13.2	0.28	3.36	3600	27.07	0.77	3.42	32.4
R127015SH	12	7~13.2	0.30	3.60	4200	32.01	0.91	4.62	37.9
R127015SU	12	7~13.2	0.35	4.20	4800	36.54	1.04	5.75	42.1

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

R7015MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 31g

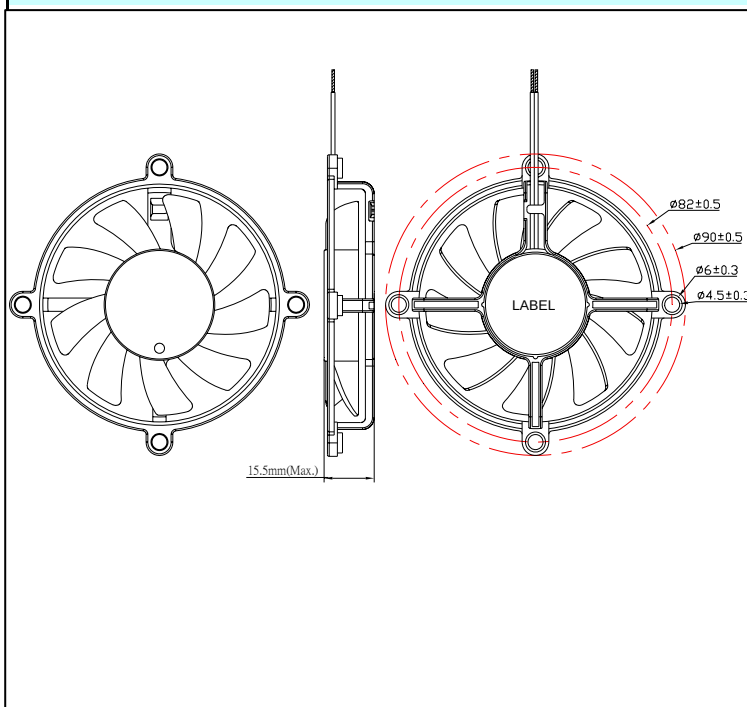

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

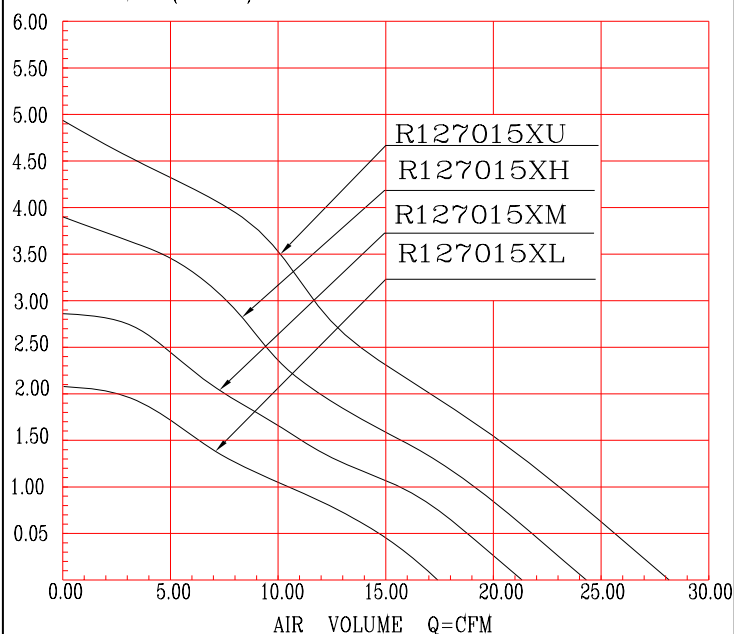

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.25	3.00	3000	17.40	0.49	2.08	27.8
R127015BM	12	7~13.2	0.28	3.36	3600	21.23	0.60	2.87	32.6
R127015BH	12	7~13.2	0.30	3.60	4200	24.36	0.69	3.90	37.3
R127015BU	12	7~13.2	0.35	4.20	4800	28.10	0.80	4.93	40.6
R127015DL	12	7~13.2	0.25	3.00	3000	17.40	0.49	2.08	27.8
R127015DM	12	7~13.2	0.28	3.36	3600	21.23	0.60	2.87	32.6
R127015DH	12	7~13.2	0.30	3.60	4200	24.36	0.69	3.90	37.3
R127015DU	12	7~13.2	0.35	4.20	4800	28.10	0.80	4.93	40.6
R127015SL	12	7~13.2	0.25	3.00	3000	17.40	0.49	2.08	27.8
R127015SM	12	7~13.2	0.28	3.36	3600	21.23	0.60	2.87	32.6
R127015SH	12	7~13.2	0.30	3.60	4200	24.36	0.69	3.90	37.3
R127015SU	12	7~13.2	0.35	4.20	4800	28.10	0.80	4.93	40.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

T7015MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

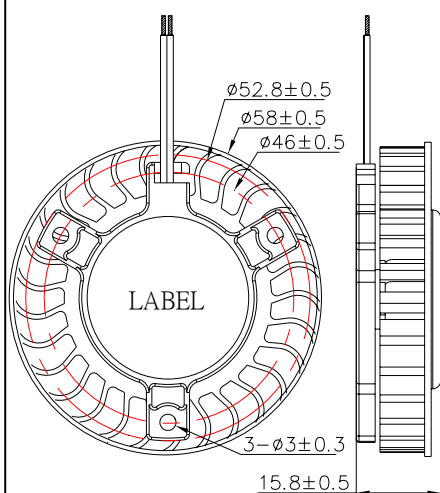

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

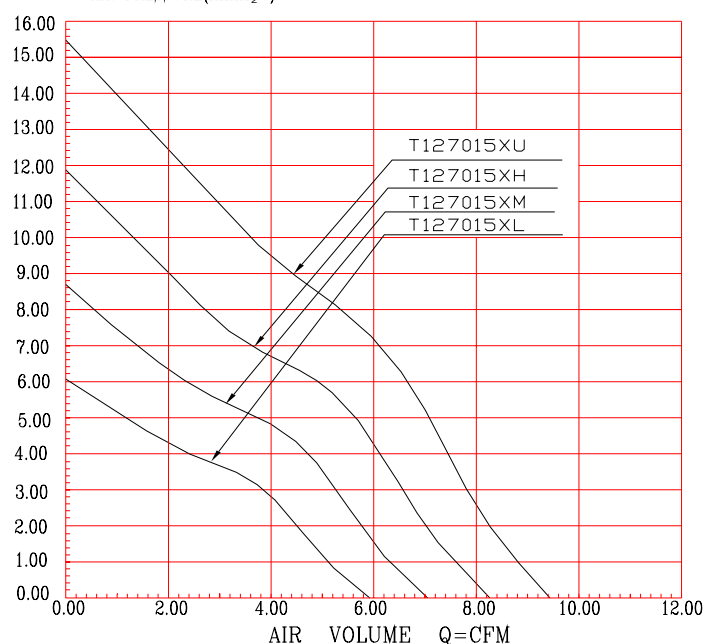

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127015BL	12	7~13.2	0.12	1.44	3000	5.93	0.17	6.08	37.5
T127015BM	12	7~13.2	0.15	1.80	3600	7.12	0.20	8.75	43.0
T127015BH	12	7~13.2	0.25	3.00	4200	8.30	0.24	11.91	45.0
T127015BU	12	7~13.2	0.30	3.60	4800	9.49	0.27	15.55	48.5
T127015DL	12	7~13.2	0.12	1.44	3000	5.93	0.17	6.08	37.5
T127015DM	12	7~13.2	0.15	1.80	3600	7.12	0.20	8.75	43.0
T127015DH	12	7~13.2	0.25	3.00	4200	8.30	0.24	11.91	45.0
T127015DU	12	7~13.2	0.30	3.60	4800	9.49	0.27	15.55	48.5
T127015SL	12	7~13.2	0.12	1.44	3000	5.93	0.17	6.08	37.5
T127015SM	12	7~13.2	0.15	1.80	3600	7.12	0.20	8.75	43.0
T127015SH	12	7~13.2	0.25	3.00	4200	8.30	0.24	11.91	45.0
T127015SU	12	7~13.2	0.30	3.60	4800	9.49	0.27	15.55	48.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (SIXTH)

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

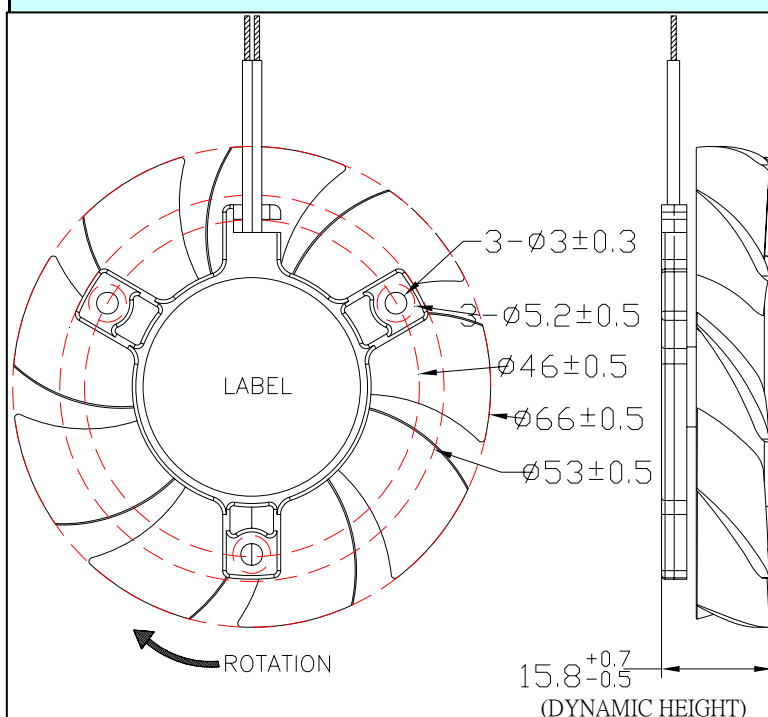

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

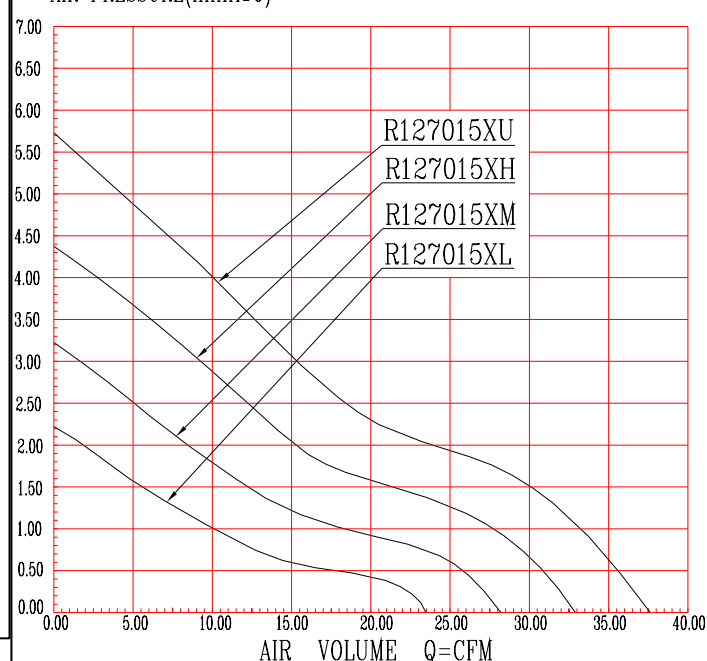

T7015孔距有46mm及45mm

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127015BL	12	7~13.2	0.12	1.44	3000	23.49	0.67	2.23	29.1
T127015BM	12	7~13.2	0.15	1.80	3600	28.19	0.80	3.22	32.8
T127015BH	12	7~13.2	0.25	3.00	4200	32.88	0.93	4.38	37
T127015BU	12	7~13.2	0.30	3.60	4800	37.58	1.06	5.72	42.4
T127015DL	12	7~13.2	0.12	1.44	3000	23.49	0.67	2.23	29.1
T127015DM	12	7~13.2	0.15	1.80	3600	28.19	0.80	3.22	32.8
T127015DH	12	7~13.2	0.25	3.00	4200	32.88	0.93	4.38	37
T127015DU	12	7~13.2	0.30	3.60	4800	37.58	1.06	5.72	42.4
T127015SL	12	7~13.2	0.12	1.44	3000	23.49	0.67	2.23	29.1
T127015SM	12	7~13.2	0.15	1.80	3600	28.19	0.80	3.22	32.8
T127015SH	12	7~13.2	0.25	3.00	4200	32.88	0.93	4.38	37
T127015SU	12	7~13.2	0.30	3.60	4800	37.58	1.06	5.72	42.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (seventh)

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 34g

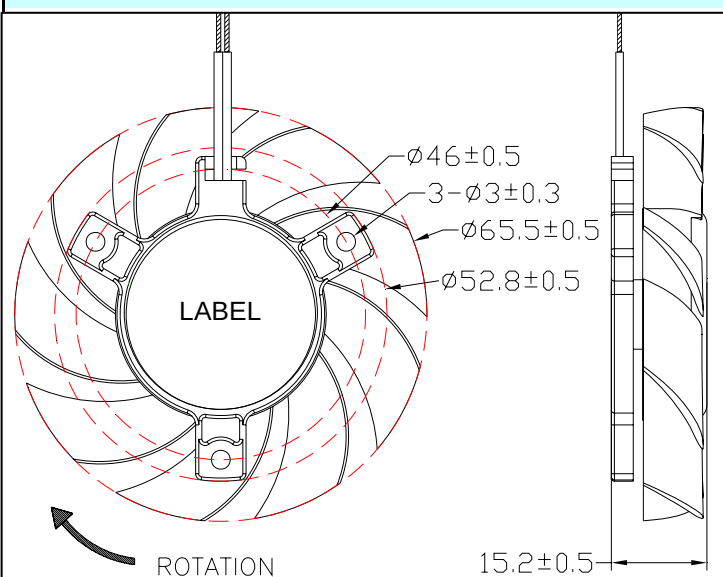

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

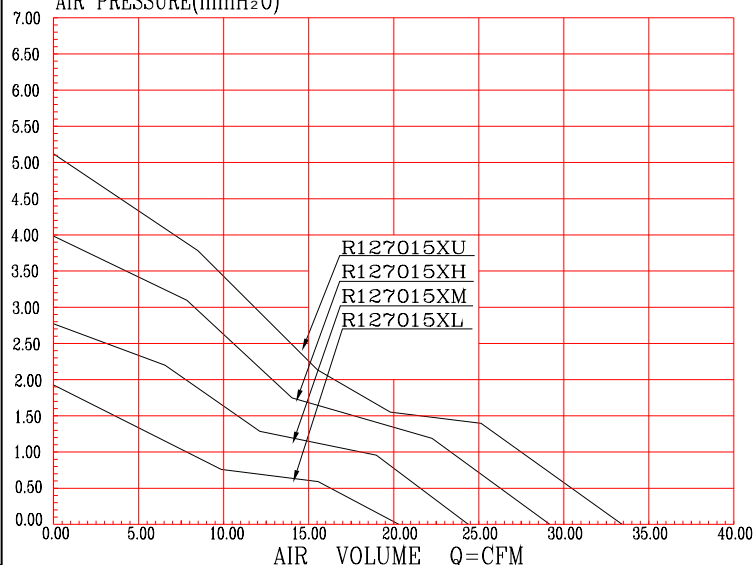

T7015孔距有46mm及45mm

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127015BL	12	7~13.2	0.12	1.44	3000	20.33	0.58	1.93	27
T127015BM	12	7~13.2	0.15	1.80	3600	24.39	0.69	2.78	31.6
T127015BH	12	7~13.2	0.25	3.00	4200	29.26	0.83	3.91	36.5
T127015BU	12	7~13.2	0.30	3.60	4800	33.43	0.95	5.11	41
T127015DL	12	7~13.2	0.12	1.44	3000	20.33	0.58	1.93	27
T127015DM	12	7~13.2	0.15	1.80	3600	24.39	0.69	2.78	31.6
T127015DH	12	7~13.2	0.25	3.00	4200	29.26	0.83	3.91	36.5
T127015DU	12	7~13.2	0.30	3.60	4800	33.43	0.95	5.11	41
T127015SL	12	7~13.2	0.12	1.44	3000	20.33	0.58	1.93	27
T127015SM	12	7~13.2	0.15	1.80	3600	24.39	0.69	2.78	31.6
T127015SH	12	7~13.2	0.25	3.00	4200	29.26	0.83	3.91	36.5
T127015SU	12	7~13.2	0.30	3.60	4800	33.43	0.95	5.11	41

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (fifth)

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 42g

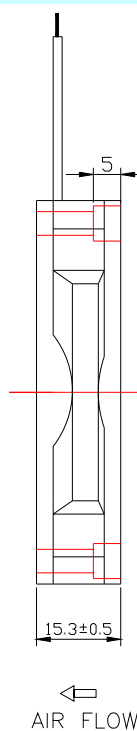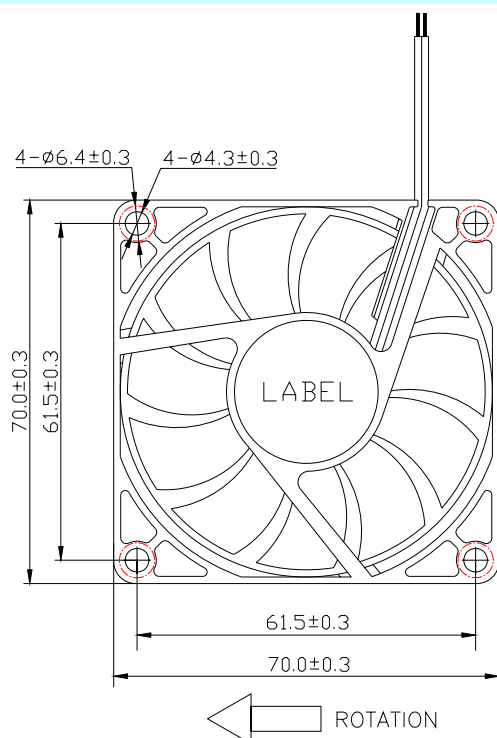

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

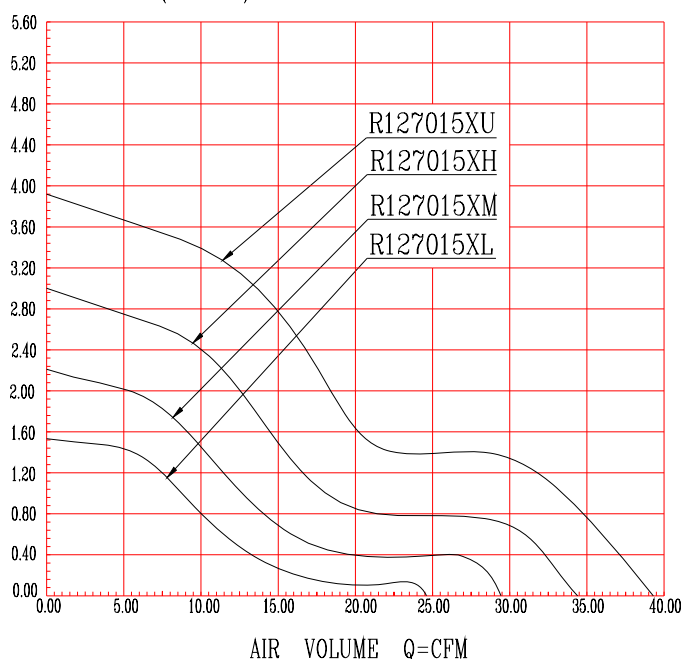

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.25	3.00	3000	24.56	0.70	1.53	28.2
R127015BM	12	7~13.2	0.28	3.36	3600	29.47	0.83	2.21	31.9
R127015BH	12	7~13.2	0.30	3.60	4200	34.38	0.97	3.00	36
R127015BU	12	7~13.2	0.35	4.20	4800	39.29	1.11	3.92	38.9
R127015DL	12	7~13.2	0.25	3.00	3000	24.56	0.70	1.53	28.2
R127015DM	12	7~13.2	0.28	3.36	3600	29.47	0.83	2.21	31.9
R127015DH	12	7~13.2	0.30	3.60	4200	34.38	0.97	3.00	36
R127015DU	12	7~13.2	0.35	4.20	4800	39.29	1.11	3.92	38.9
R127015SL	12	7~13.2	0.25	3.00	3000	24.56	0.70	1.53	28.2
R127015SM	12	7~13.2	0.28	3.36	3600	29.47	0.83	2.21	31.9
R127015SH	12	7~13.2	0.30	3.60	4200	34.38	0.97	3.00	36
R127015SU	12	7~13.2	0.35	4.20	4800	39.29	1.11	3.92	38.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (SIXTH)

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 42g

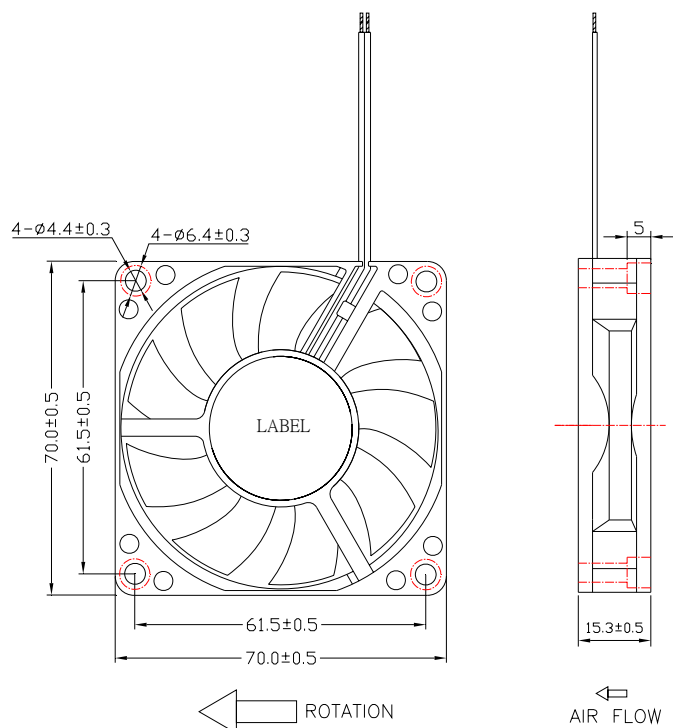

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

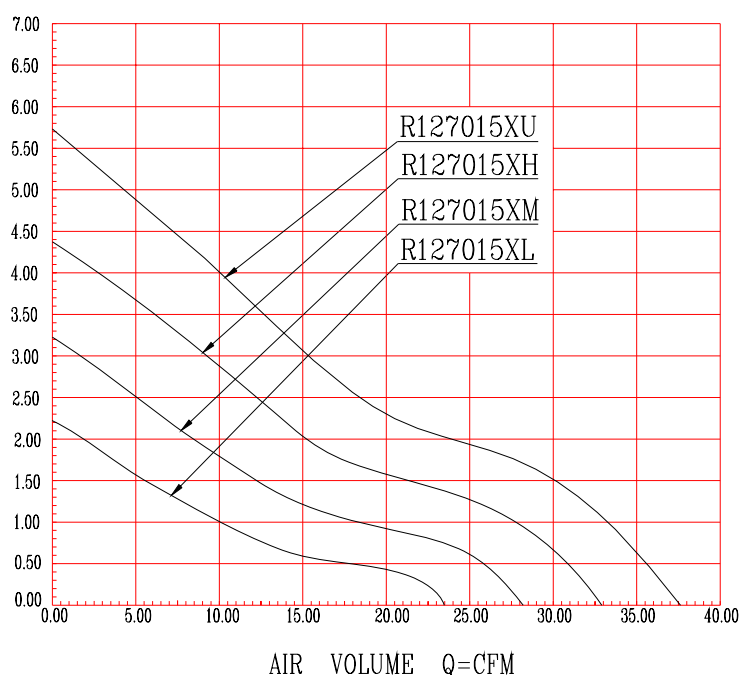

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.12	1.44	3000	23.49	0.67	2.23	29.1
R127015BM	12	7~13.2	0.15	1.80	3600	28.19	0.80	3.22	32.8
R127015BH	12	7~13.2	0.25	3.00	4200	32.88	0.93	4.38	37
R127015BU	12	7~13.2	0.30	3.60	4800	37.58	1.06	5.72	42.4
R127015DL	12	7~13.2	0.12	1.44	3000	23.49	0.67	2.23	29.1
R127015DM	12	7~13.2	0.15	1.80	3600	28.19	0.80	3.22	32.8
R127015DH	12	7~13.2	0.25	3.00	4200	32.88	0.93	4.38	37
R127015DU	12	7~13.2	0.30	3.60	4800	37.58	1.06	5.72	42.4
R127015SL	12	7~13.2	0.12	1.44	3000	23.49	0.67	2.23	29.1
R127015SM	12	7~13.2	0.15	1.80	3600	28.19	0.80	3.22	32.8
R127015SH	12	7~13.2	0.25	3.00	4200	32.88	0.93	4.38	37
R127015SU	12	7~13.2	0.30	3.60	4800	37.58	1.06	5.72	42.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (seventh)

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 42g

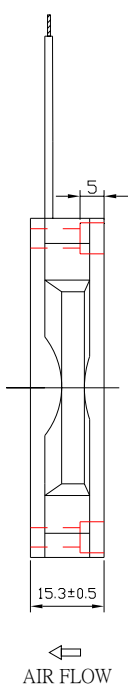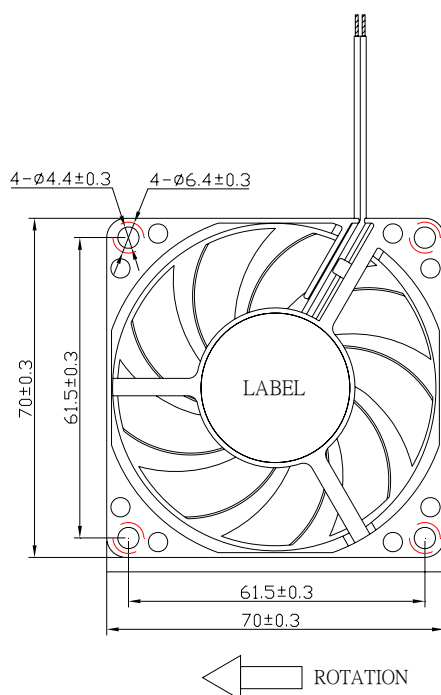

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

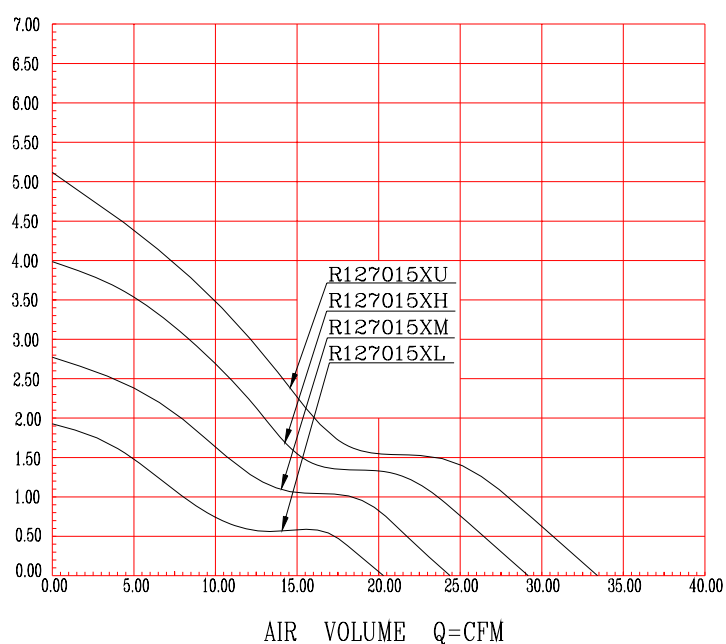

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.12	1.44	3000	20.33	0.58	1.93	27
R127015BM	12	7~13.2	0.15	1.80	3600	24.39	0.69	2.78	31.6
R127015BH	12	7~13.2	0.25	3.00	4200	29.26	0.83	3.91	36.5
R127015BU	12	7~13.2	0.30	3.60	4800	33.43	0.95	5.11	41
R127015DL	12	7~13.2	0.12	1.44	3000	20.33	0.58	1.93	27
R127015DM	12	7~13.2	0.15	1.80	3600	24.39	0.69	2.78	31.6
R127015DH	12	7~13.2	0.25	3.00	4200	29.26	0.83	3.91	36.5
R127015DU	12	7~13.2	0.30	3.60	4800	33.43	0.95	5.11	41
R127015SL	12	7~13.2	0.12	1.44	3000	20.33	0.58	1.93	27
R127015SM	12	7~13.2	0.15	1.80	3600	24.39	0.69	2.78	31.6
R127015SH	12	7~13.2	0.25	3.00	4200	29.26	0.83	3.91	36.5
R127015SU	12	7~13.2	0.30	3.60	4800	33.43	0.95	5.11	41

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

70×70×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 42g

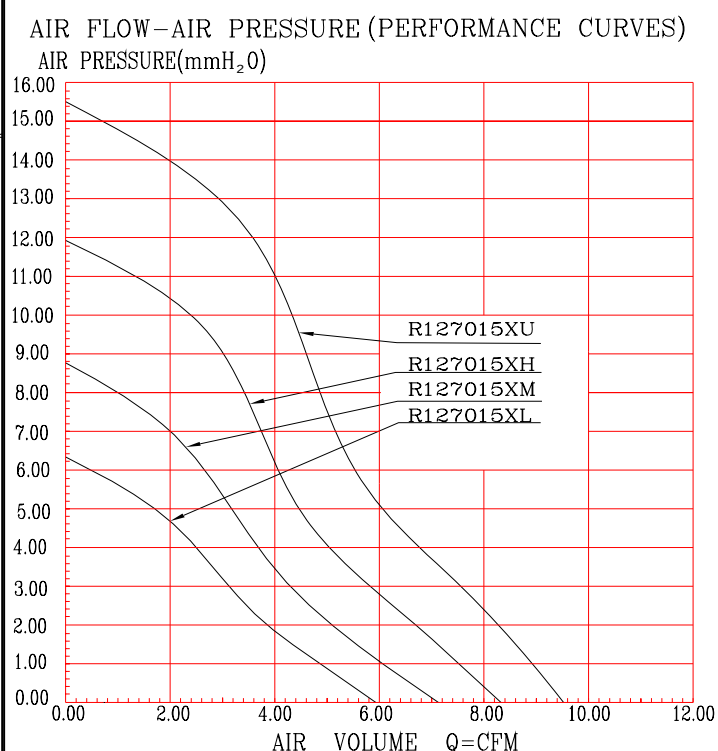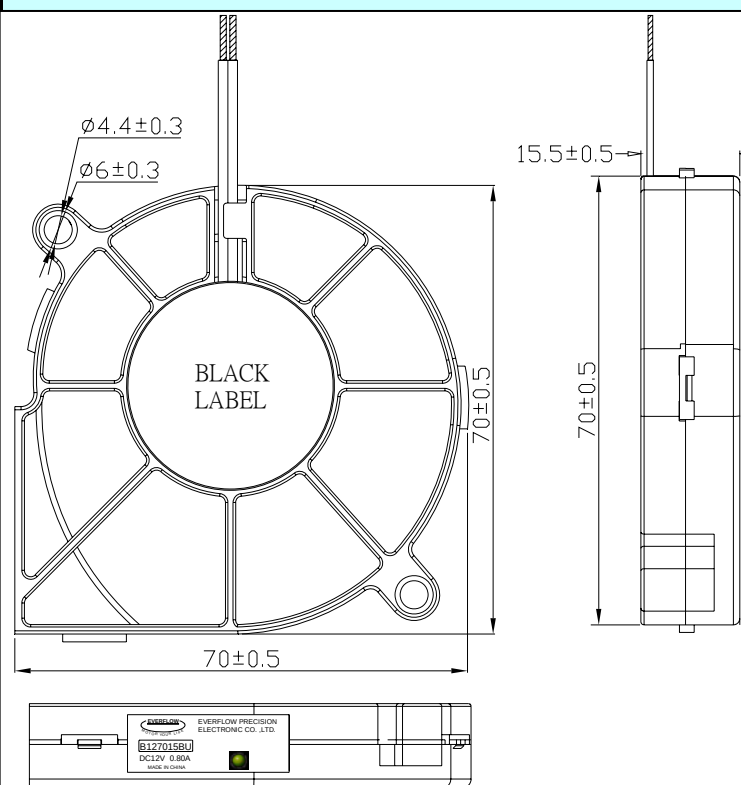

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127015BL	12	7~13.2	0.35	4.20	3600	7.14	0.20	9.10	43.0
B127015BM	12	7~13.2	0.45	5.40	4200	8.31	0.24	11.91	45.2
B127015BH	12	7~13.2	0.60	7.20	4800	9.49	0.27	15.56	48.6
B127015BU	12	7~13.2	0.80	9.60	5400	10.68	0.30	19.68	52.30

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×20MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 58g

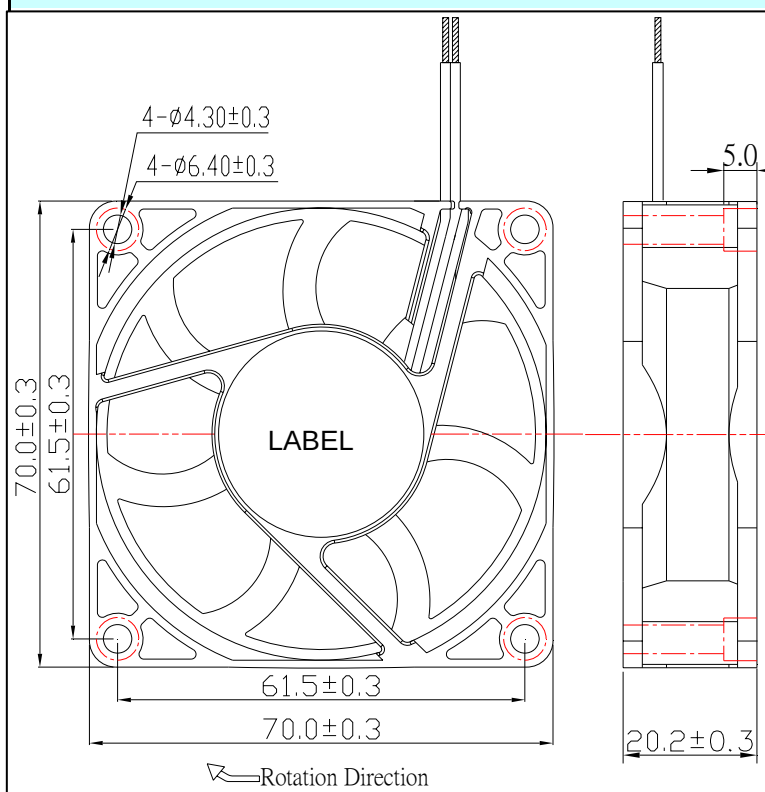

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

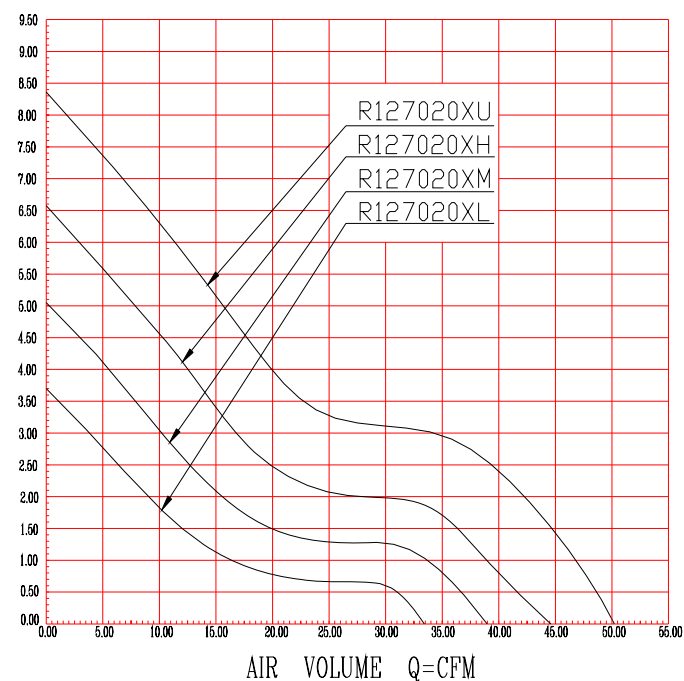

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127020BL	12	7~13.2	0.20	2.40	3600	33.42	0.95	3.70	33.3
R127020BM	12	7~13.2	0.26	3.12	4200	38.99	1.10	5.04	37
R127020BH	12	7~13.2	0.30	3.60	4800	44.56	1.26	6.58	40.7
R127020BU	12	7~13.2	0.40	4.80	5400	50.13	1.42	8.33	43.3
R127020DL	12	7~13.2	0.20	2.40	3600	33.42	0.95	3.70	33.3
R127020DM	12	7~13.2	0.26	3.12	4200	38.99	1.10	5.04	37
R127020DH	12	7~13.2	0.30	3.60	4800	44.56	1.26	6.58	40.7
R127020DU	12	7~13.2	0.40	4.80	5400	50.13	1.42	8.33	43.3
R127020SL	12	7~13.2	0.20	2.40	3600	33.42	0.95	3.70	33.3
R127020SM	12	7~13.2	0.26	3.12	4200	38.99	1.10	5.04	37
R127020SH	12	7~13.2	0.30	3.60	4800	44.56	1.26	6.58	40.7
R127020SU	12	7~13.2	0.40	4.80	5400	50.13	1.42	8.33	43.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 53g

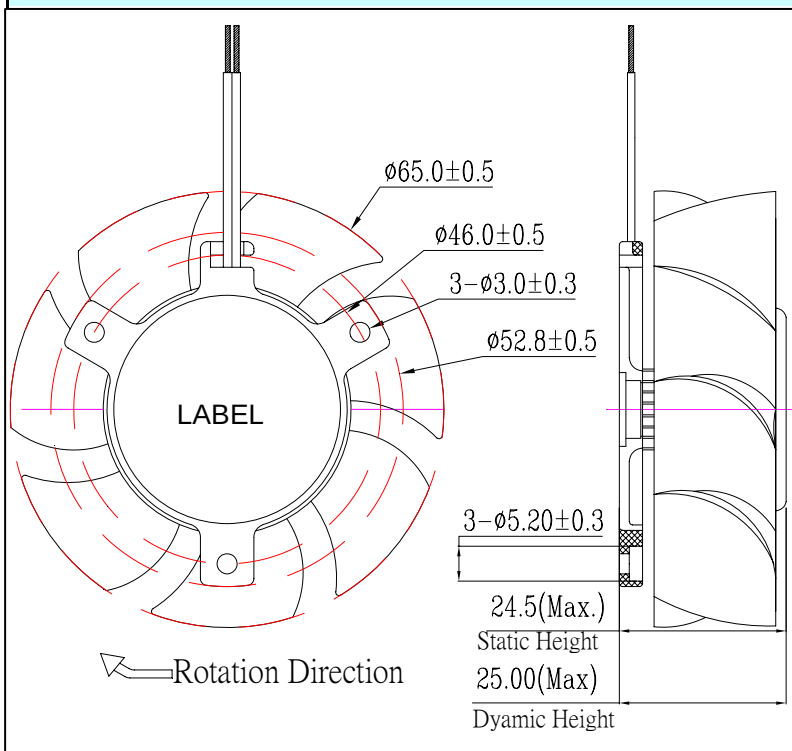

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

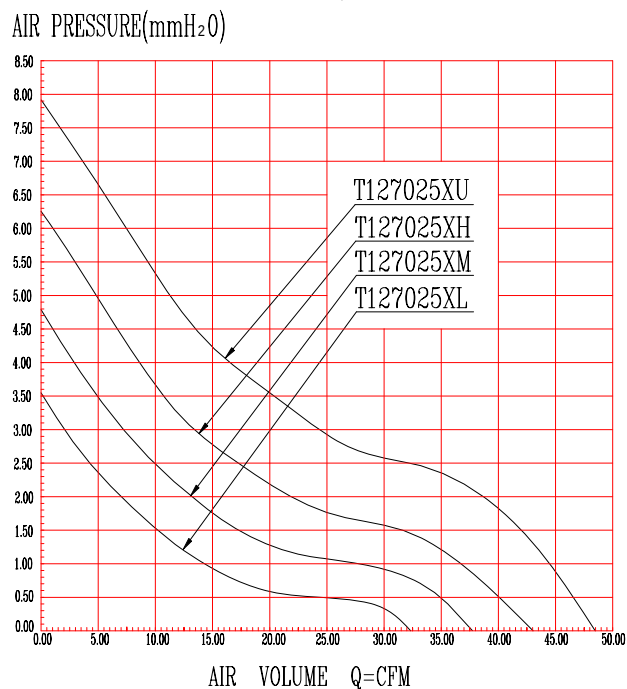

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127025BL	12	7~13.2	0.15	1.80	3600	32.33	0.92	3.52	29.6
T127025BM	12	7~13.2	0.25	3.00	4200	37.71	1.07	4.79	34.8
T127025BH	12	7~13.2	0.30	3.60	4800	43.10	1.22	6.25	37.8
T127025BU	12	7~13.2	0.40	4.80	5400	48.49	1.37	7.91	40.2
T127025DL	12	7~13.2	0.15	1.80	3600	32.33	0.92	3.52	29.6
T127025DM	12	7~13.2	0.25	3.00	4200	37.71	1.07	4.79	34.8
T127025DH	12	7~13.2	0.30	3.60	4800	43.10	1.22	6.25	37.8
T127025DU	12	7~13.2	0.40	4.80	5400	48.49	1.37	7.91	40.2
T127025SL	12	7~13.2	0.15	1.80	3600	32.33	0.92	3.52	29.6
T127025SM	12	7~13.2	0.25	3.00	4200	37.71	1.07	4.79	34.8
T127025SH	12	7~13.2	0.30	3.60	4800	43.10	1.22	6.25	37.8
T127025SU	12	7~13.2	0.40	4.80	5400	48.49	1.37	7.91	40.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 53g

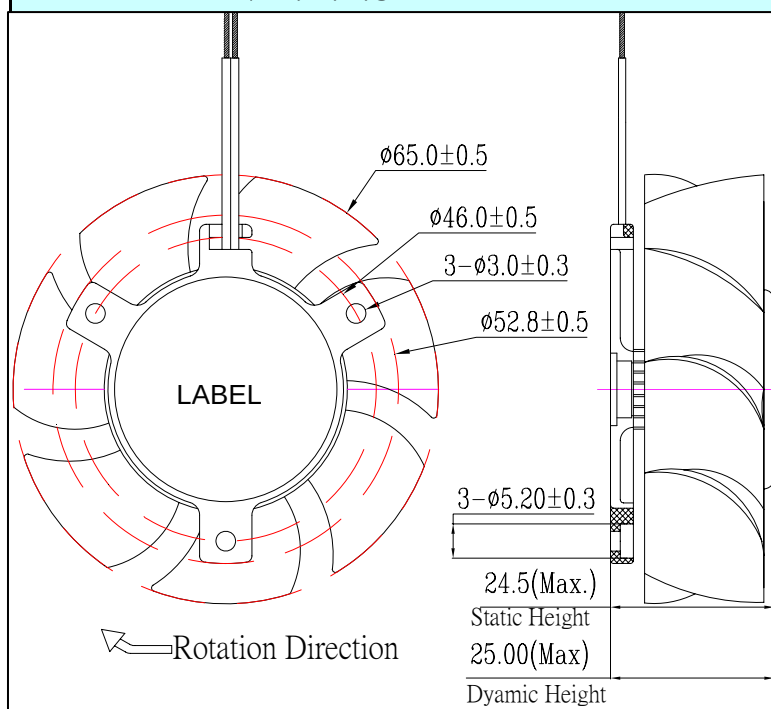

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

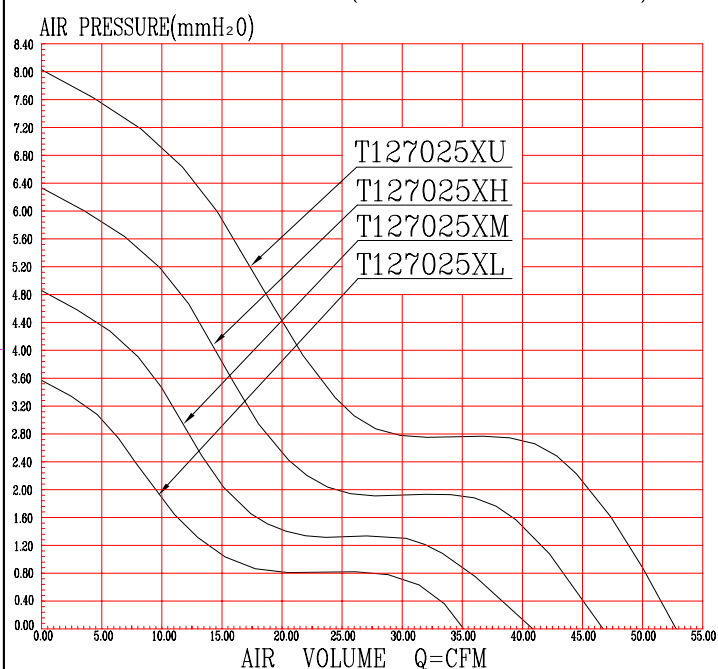

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127025BL	12	7~13.2	0.15	1.80	3600	35.03	0.99	3.56	33.5
T127025BM	12	7~13.2	0.25	3.00	4200	40.87	1.16	4.85	35.3
T127025BH	12	7~13.2	0.30	3.60	4800	46.71	1.32	6.33	40
T127025BU	12	7~13.2	0.40	4.80	5400	52.55	1.49	8.02	43.8
T127025DL	12	7~13.2	0.15	1.80	3600	35.03	0.99	3.56	33.5
T127025DM	12	7~13.2	0.25	3.00	4200	40.87	1.16	4.85	35.3
T127025DH	12	7~13.2	0.30	3.60	4800	46.71	1.32	6.33	40
T127025DU	12	7~13.2	0.40	4.80	5400	52.55	1.49	8.02	43.8
T127025SL	12	7~13.2	0.15	1.80	3600	35.03	0.99	3.56	33.5
T127025SM	12	7~13.2	0.25	3.00	4200	40.87	1.16	4.85	35.3
T127025SH	12	7~13.2	0.30	3.60	4800	46.71	1.32	6.33	40
T127025SU	12	7~13.2	0.40	4.80	5400	52.55	1.49	8.02	43.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U

24v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 70g

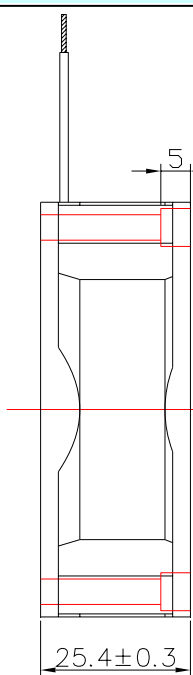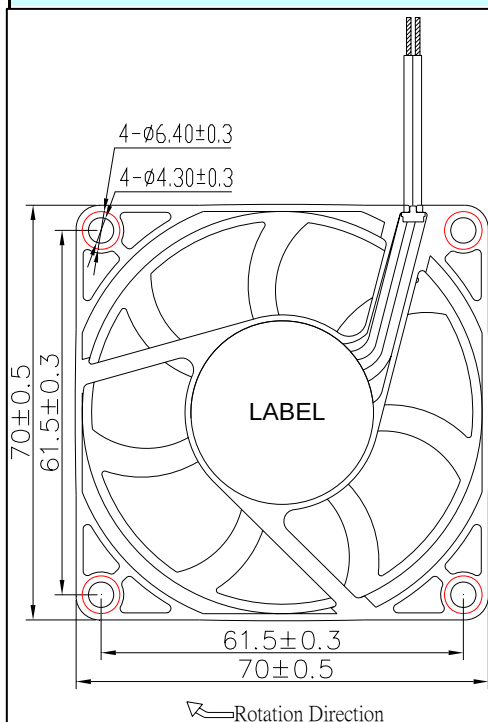

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

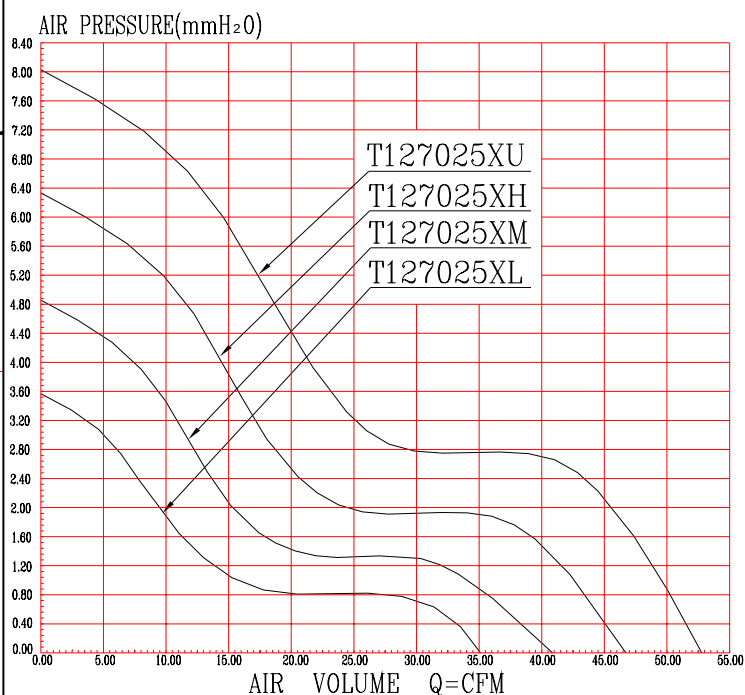

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127025BL	12	7~13.2	0.15	1.80	3600	35.03	0.99	3.56	33.5
R127025BM	12	7~13.2	0.25	3.00	4200	40.87	1.16	4.85	35.3
R127025BH	12	7~13.2	0.30	3.60	4800	46.71	1.32	6.33	40
R127025BU	12	7~13.2	0.40	4.80	5400	52.55	1.49	8.02	43.8
R127025DL	12	7~13.2	0.15	1.80	3600	35.03	0.99	3.56	33.5
R127025DM	12	7~13.2	0.25	3.00	4200	40.87	1.16	4.85	35.3
R127025DH	12	7~13.2	0.30	3.60	4800	46.71	1.32	6.33	40
R127025DU	12	7~13.2	0.40	4.80	5400	52.55	1.49	8.02	43.8
R127025SL	12	7~13.2	0.15	1.80	3600	35.03	0.99	3.56	33.5
R127025SM	12	7~13.2	0.25	3.00	4200	40.87	1.16	4.85	35.3
R127025SH	12	7~13.2	0.30	3.60	4800	46.71	1.32	6.33	40
R127025SU	12	7~13.2	0.40	4.80	5400	52.55	1.49	8.02	43.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 70g

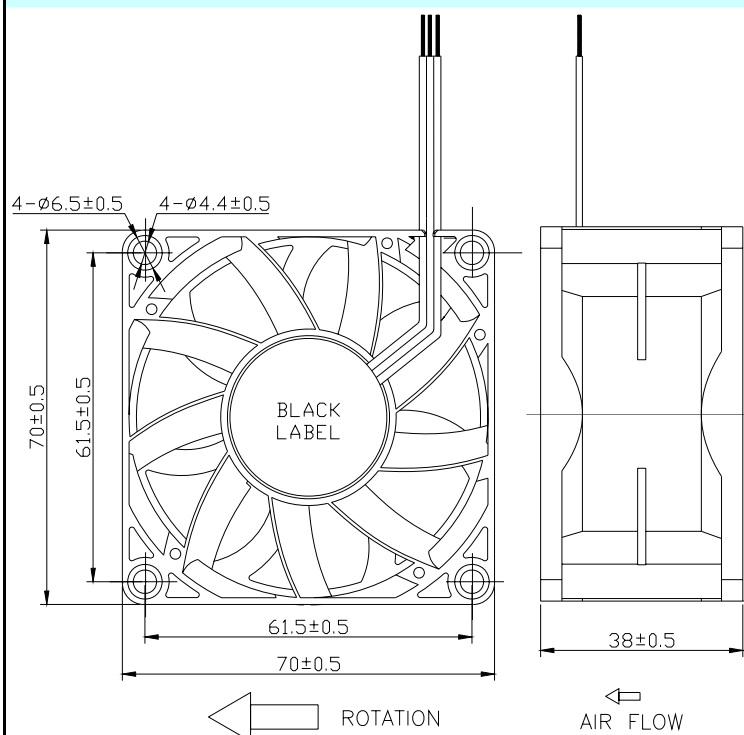

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

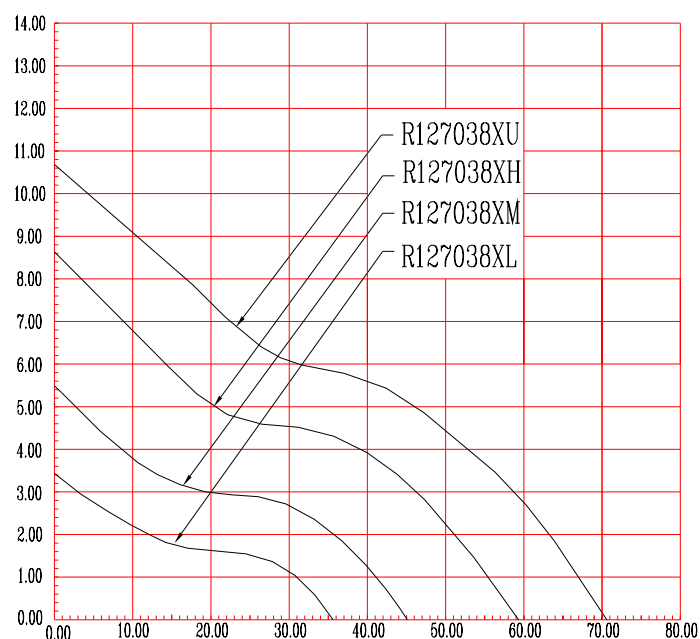

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127038BL	12	7~13.2	0.28	3.36	3800	35.56	1.01	3.46	35.8
R127038BM	12	7~13.2	0.35	4.20	4800	44.91	1.27	5.52	45
R127038BH	12	7~13.2	0.50	6.00	5800	59.38	1.68	8.61	47.3
R127038BU	12	7~13.2	0.80	9.60	6800	70.60	2.00	10.73	51

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

75×75×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 85g

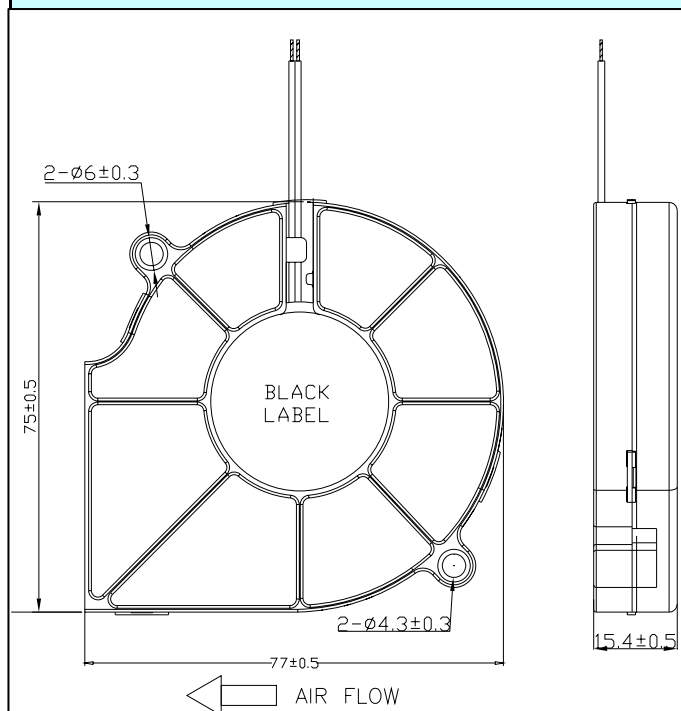

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

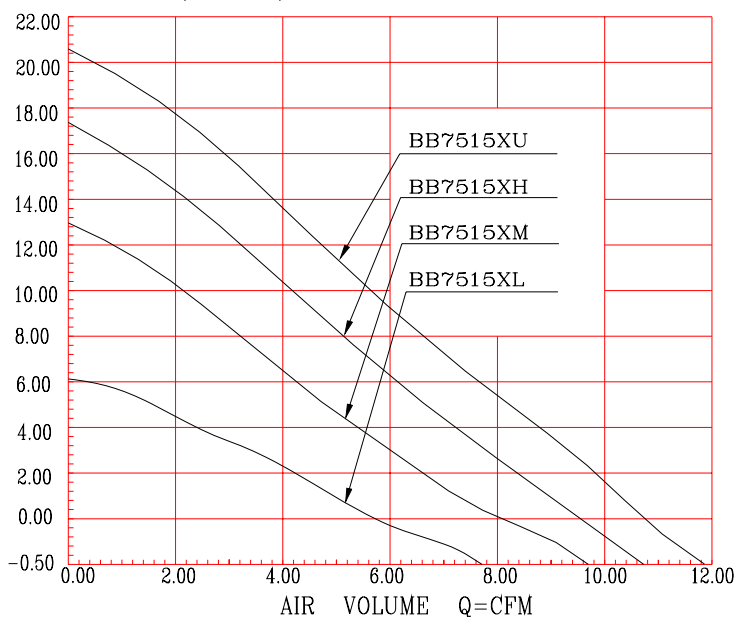

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127515BL	12	7~13.2	0.40	4.80	4000	7.72	0.22	6.15	42.7
B127515BM	12	7~13.2	0.50	6.00	4500	9.68	0.27	13.83	47
B127515BH	12	7~13.2	0.60	7.20	5000	10.75	0.30	17.07	49
B127515BU	12	7~13.2	0.80	9.60	5500	11.83	0.34	20.66	51

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

75×75×30MM SERIES (R480)

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 85g

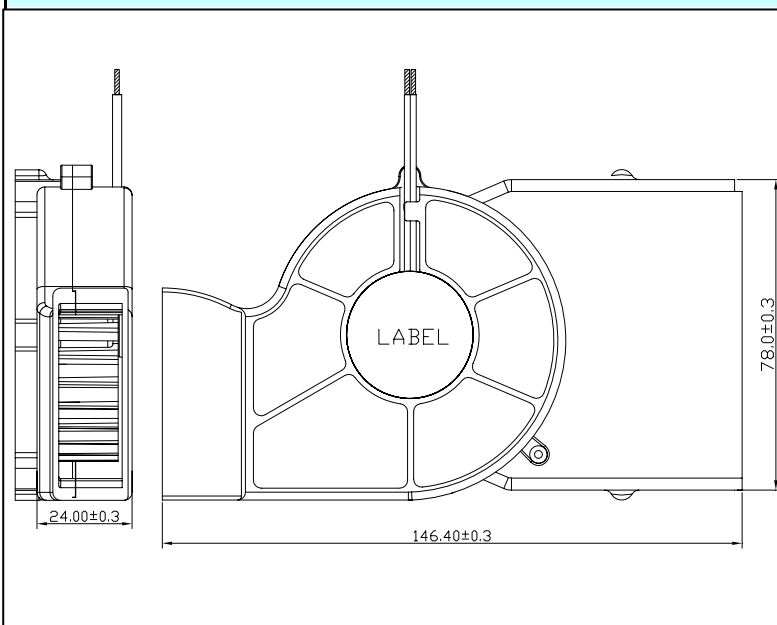

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

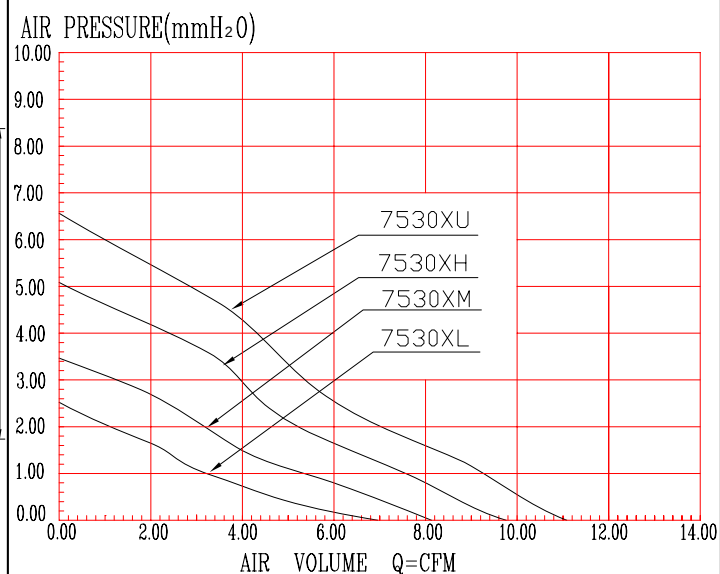

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127530BL	12	7~13.2	0.18	2.16	2050	6.92	0.20	2.50	35
B127530BM	12	7~13.2	0.20	2.40	2400	8.10	0.23	3.43	38
B127530BH	12	7~13.2	0.30	3.60	2900	9.79	0.28	5.01	42.8
B127530BU	12	7~13.2	0.42	5.04	3300	11.41	0.32	6.48	45
B127530SL	12	7~13.2	0.18	2.16	2050	6.92	0.20	2.50	35
B127530SM	12	7~13.2	0.20	2.40	2400	8.10	0.23	3.43	38
B127530SH	12	7~13.2	0.30	3.60	2900	9.79	0.28	5.01	42.8
B127530SU	12	7~13.2	0.42	5.04	3300	11.41	0.32	6.48	45

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

75×75×30MM SERIES (R520)

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 85g

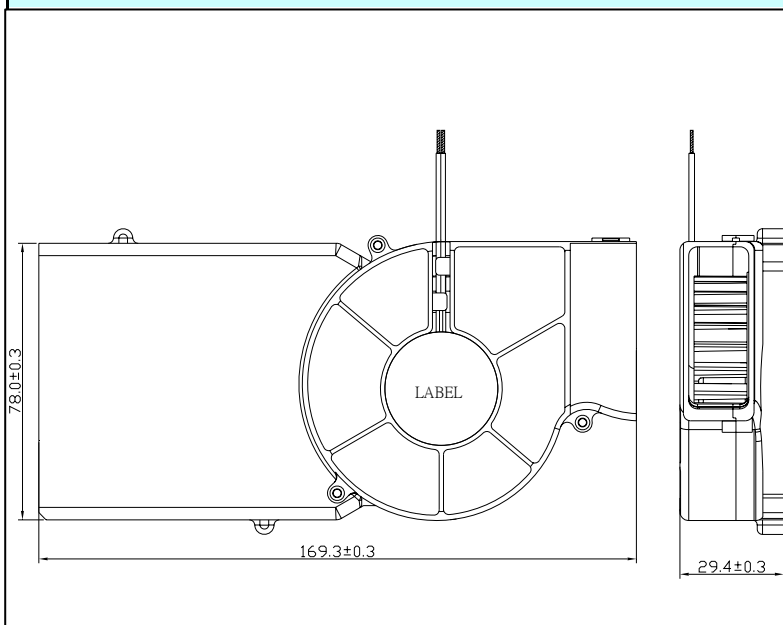

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

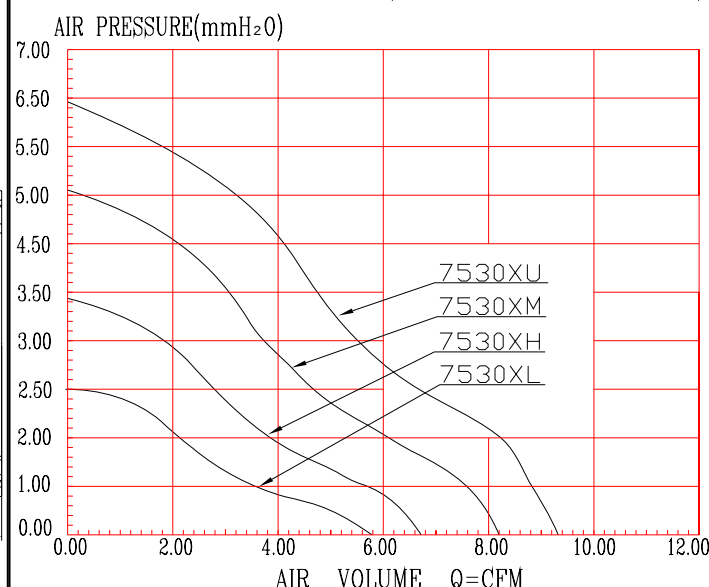

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127530BL	12	7~13.2	0.18	2.16	2050	6.92	0.20	2.50	35
B127530BM	12	7~13.2	0.20	2.40	2400	8.10	0.23	3.43	38
B127530BH	12	7~13.2	0.30	3.60	2900	9.79	0.28	5.01	42.8
B127530BU	12	7~13.2	0.42	5.04	3300	11.41	0.32	6.48	45
B127530SL	12	7~13.2	0.18	2.16	2050	6.92	0.20	2.50	35
B127530SM	12	7~13.2	0.20	2.40	2400	8.10	0.23	3.43	38
B127530SH	12	7~13.2	0.30	3.60	2900	9.79	0.28	5.01	42.8
B127530SU	12	7~13.2	0.42	5.04	3300	11.41	0.32	6.48	45

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

75×75×30MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 85g

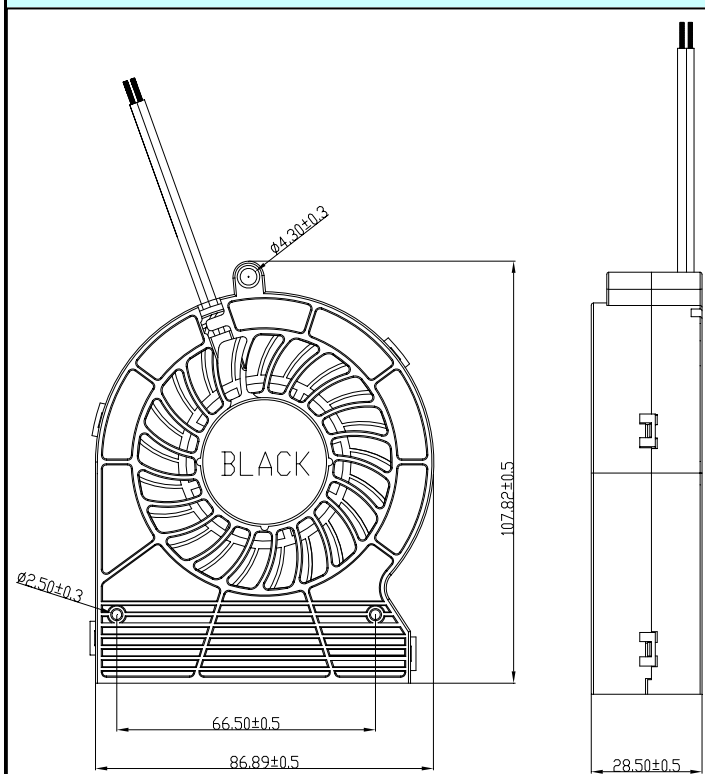

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

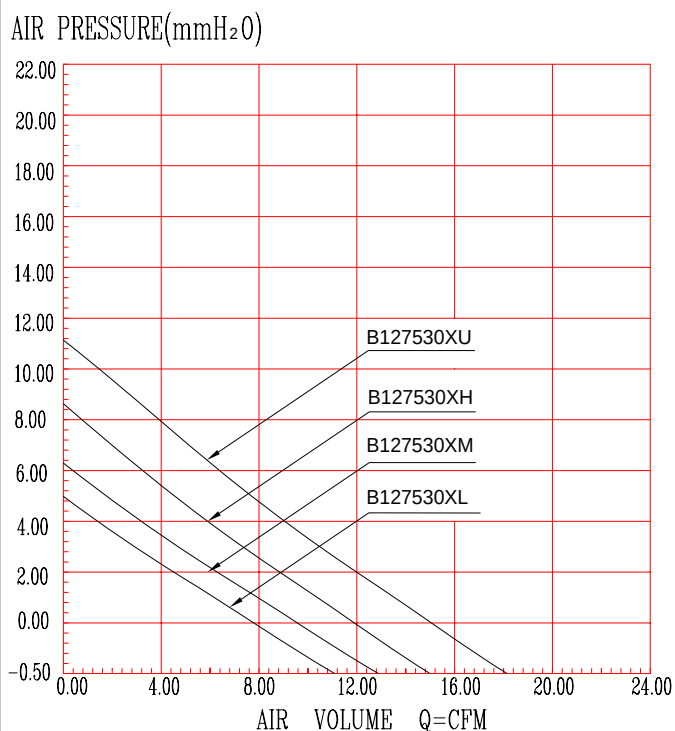

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127530*L	12	7~13.2	0.18	2.16	2050	11.53	0.33	4.85	35.5
B127530*M	12	7~13.2	0.20	2.40	2400	12.96	0.37	6.24	38
B127530*H	12	7~13.2	0.30	3.60	2900	14.99	0.42	8.83	45
B127530*U	12	7~13.2	0.42	5.04	3300	17.14	0.49	11.80	48

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

75×75×30MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 85g

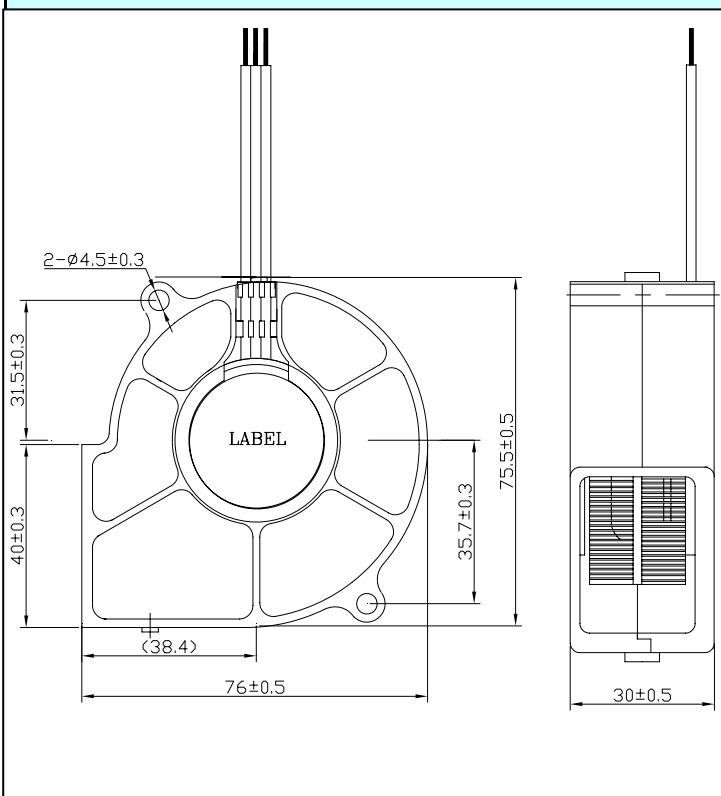

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

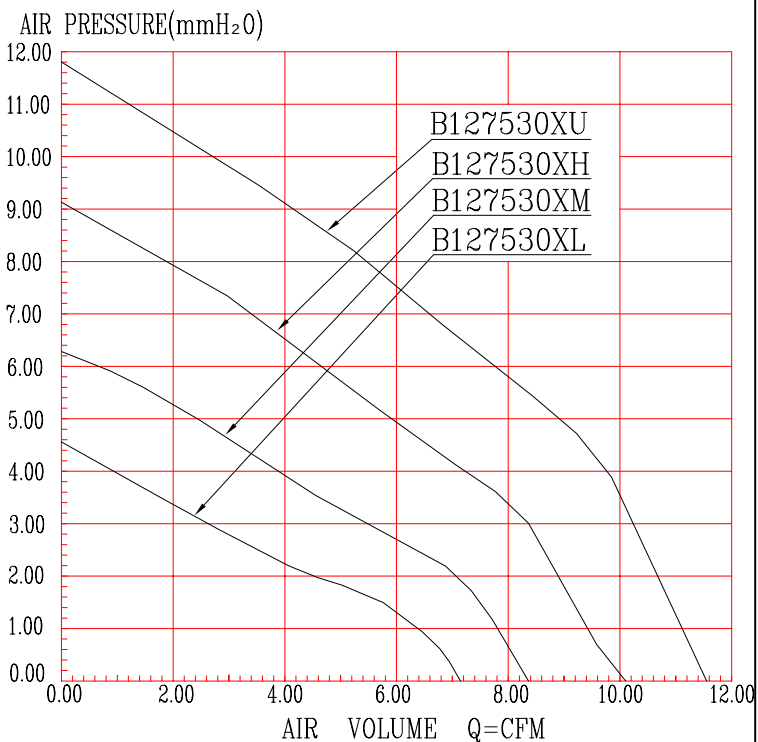

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127530BL	12	7~13.2	0.18	2.16	2050	7.14	0.20	4.56	26.7
B127530BM	12	7~13.2	0.20	2.40	2400	8.36	0.24	6.25	31.5
B127530BH	12	7~13.2	0.30	3.60	2900	10.10	0.29	9.12	35.6
B127530BU	12	7~13.2	0.42	5.04	3300	11.49	0.33	11.81	38.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

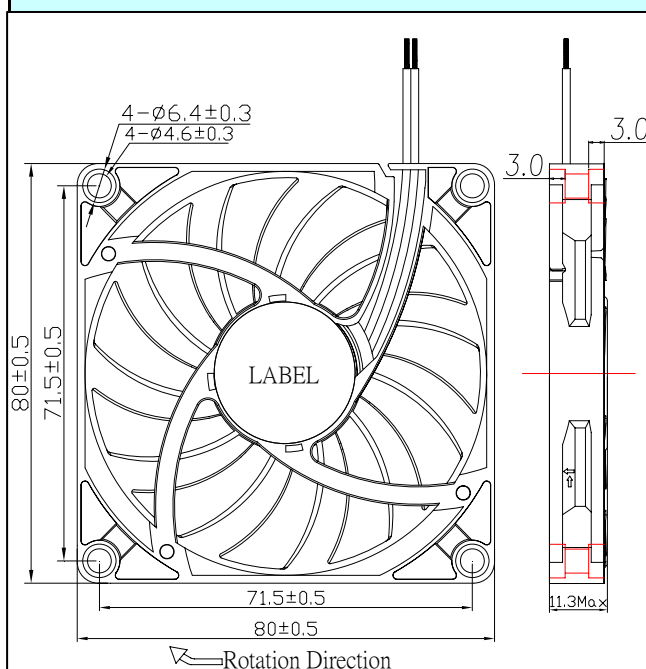

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

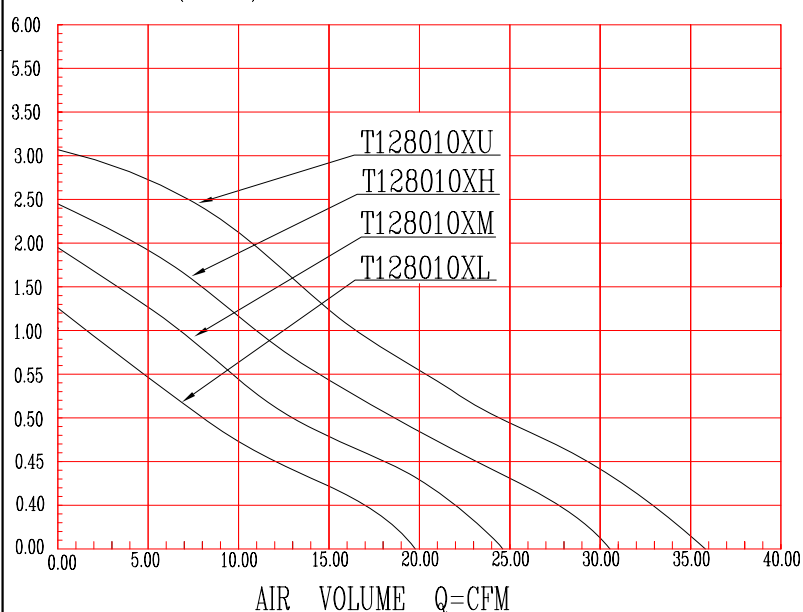

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128010BL	12	7~13.2	0.15	1.8	2400	19.84	0.56	1.25	24
R128010BM	12	7~13.2	0.20	2.40	3000	24.80	0.70	1.95	27.7
R128010BH	12	7~13.2	0.25	3.00	3600	30.05	0.85	2.45	31.8
R128010BU	12	7~13.2	0.35	4.20	4200	35.89	1.02	3.07	36.5
R128010DL	12	7~13.2	0.15	1.8	2400	19.84	0.56	1.25	24
R128010DM	12	7~13.2	0.20	2.40	3000	24.80	0.70	1.95	27.7
R128010DH	12	7~13.2	0.25	3.00	3600	30.05	0.85	2.45	31.8
R128010DU	12	7~13.2	0.35	4.20	4200	35.89	1.02	3.07	36.5
R128010SL	12	7~13.2	0.15	1.8	2400	19.84	0.56	1.25	24
R128010SM	12	7~13.2	0.20	2.40	3000	24.80	0.70	1.95	27.7
R128010SH	12	7~13.2	0.25	3.00	3600	30.05	0.85	2.45	31.8
R128010SU	12	7~13.2	0.35	4.20	4200	35.89	1.02	3.07	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×10MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 24g

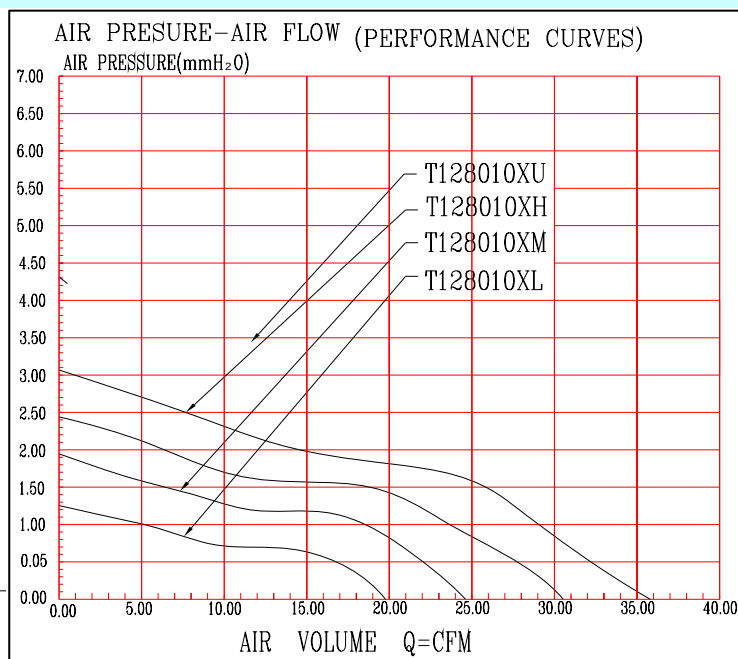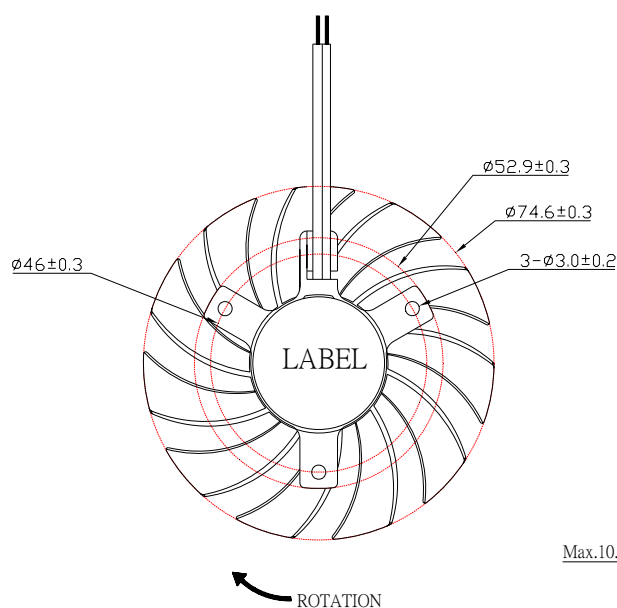

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T128010BL	12	7~13.2	0.15	1.8	2400	19.84	0.56	1.25	24
T128010BM	12	7~13.2	0.20	2.40	3000	24.80	0.70	1.95	27.7
T128010BH	12	7~13.2	0.25	3.00	3600	30.05	0.85	2.45	31.8
T128010BU	12	7~13.2	0.35	4.20	4200	35.89	1.02	3.07	36.5
T128010DL	12	7~13.2	0.15	1.8	2400	19.84	0.56	1.25	24
T128010DM	12	7~13.2	0.20	2.40	3000	24.80	0.70	1.95	27.7
T128010DH	12	7~13.2	0.25	3.00	3600	30.05	0.85	2.45	31.8
T128010DU	12	7~13.2	0.35	4.20	4200	35.89	1.02	3.07	36.5
T128010SL	12	7~13.2	0.15	1.8	2400	19.84	0.56	1.25	24
T128010SM	12	7~13.2	0.20	2.40	3000	24.80	0.70	1.95	27.7
T128010SH	12	7~13.2	0.25	3.00	3600	30.05	0.85	2.45	31.8
T128010SU	12	7~13.2	0.35	4.20	4200	35.89	1.02	3.07	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 34g

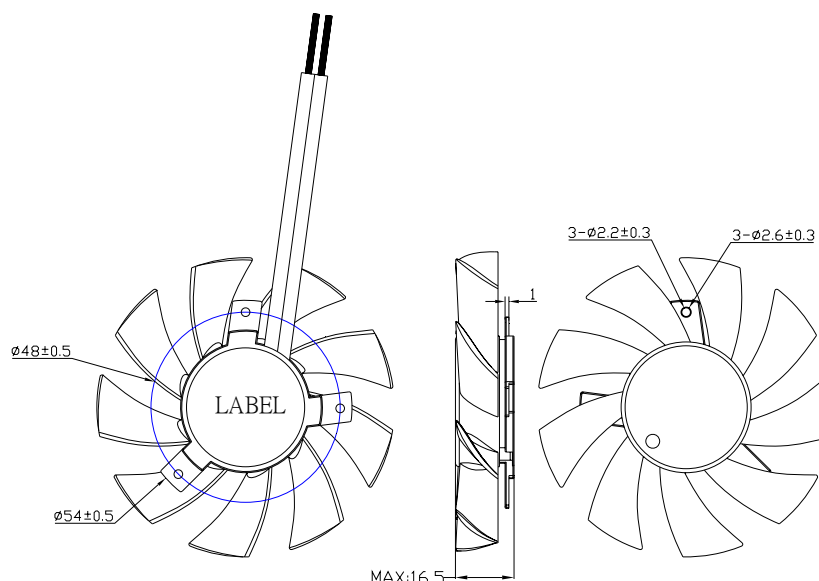

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

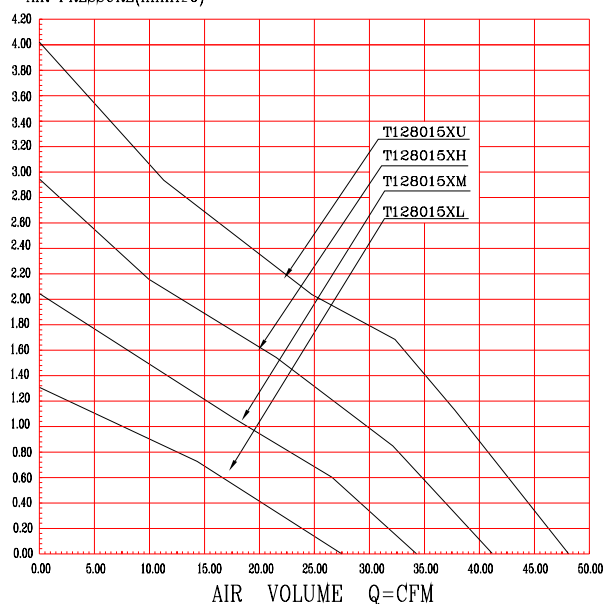

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T128015BL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015BM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015BH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015BU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40
T128015DL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015DM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015DH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015DU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40
T128015SL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015SM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015SH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015SU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 34g

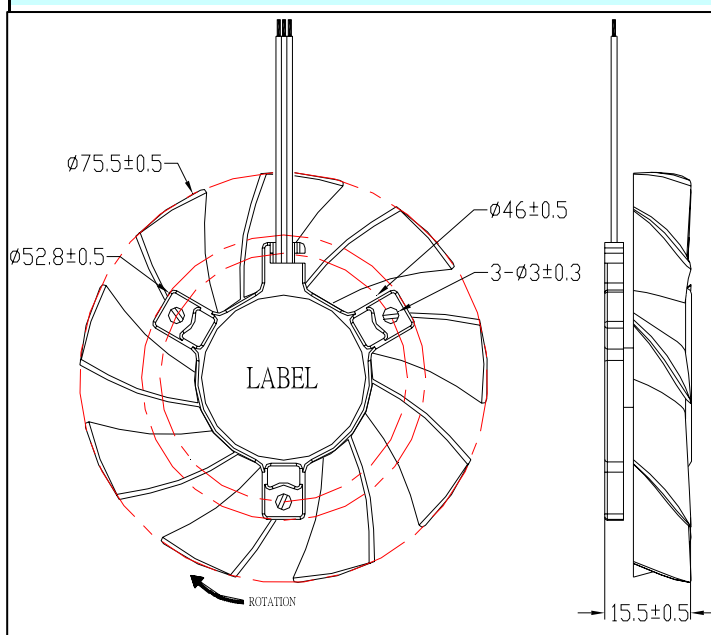

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

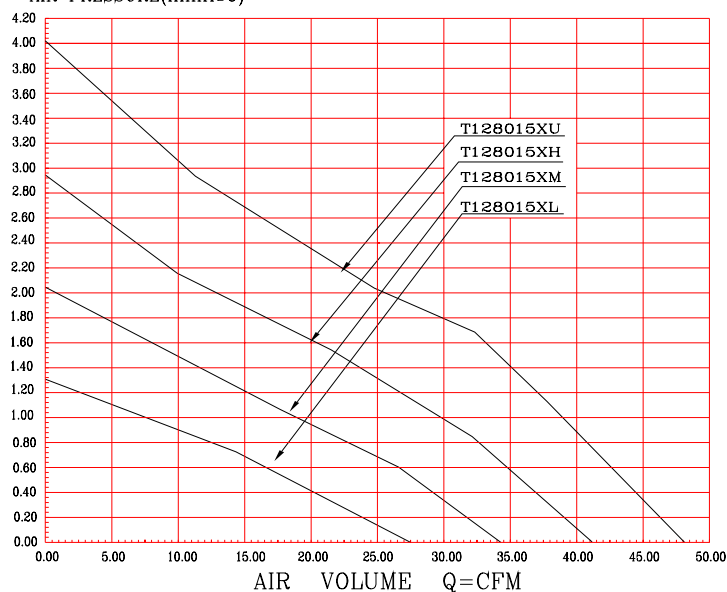

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T128015BL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015BM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015BH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015BU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40
T128015DL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015DM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015DH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015DU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40
T128015SL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015SM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015SH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015SU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 56g

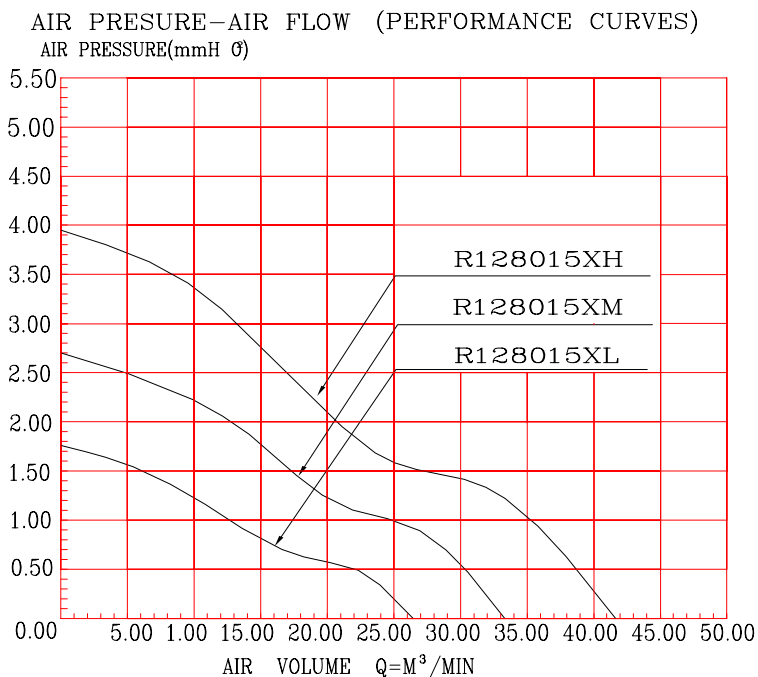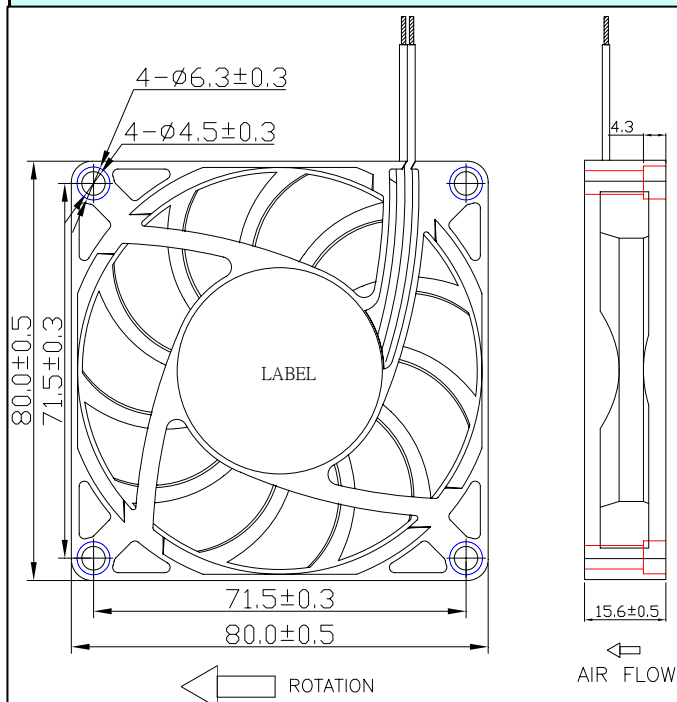

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	26.52	0.75	1.73	25.5
R128015BM	12	7~13.2	0.25	3.00	3000	33.15	0.94	2.70	31.7
R128015BH	12	7~13.2	0.32	3.84	3600	41.74	1.18	3.93	36.3
R128015DL	12	7~13.2	0.19	2.28	2400	26.52	0.75	1.73	25.5
R128015DM	12	7~13.2	0.25	3.00	3000	33.15	0.94	2.70	31.7
R128015DH	12	7~13.2	0.32	3.84	3600	41.74	1.18	3.93	36.3
R128015SL	12	7~13.2	0.19	2.28	2400	26.52	0.75	1.73	25.5
R128015SM	12	7~13.2	0.25	3.00	3000	33.15	0.94	2.70	31.7
R128015SH	12	7~13.2	0.32	3.84	3600	41.74	1.18	3.93	36.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 33g

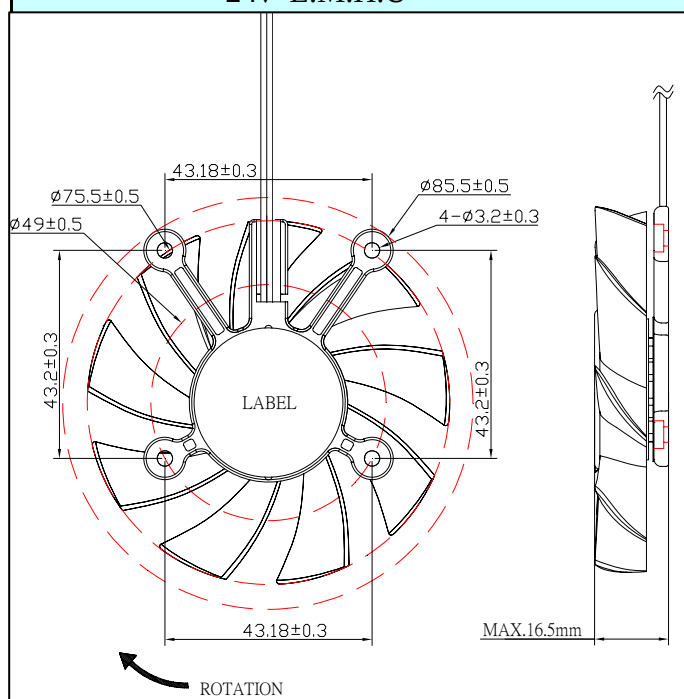

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

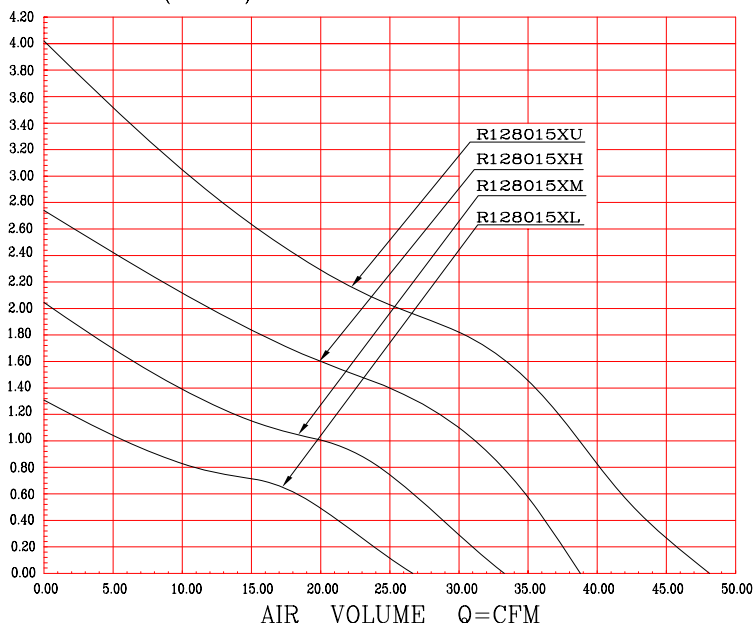

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	26.62	0.75	1.30	26
R128015BM	12	7~13.2	0.25	3.00	3000	33.27	0.94	2.03	31
R128015BH	12	7~13.2	0.32	3.84	3600	38.80	1.1	2.76	36
R128015BU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	42
R128015DL	12	7~13.2	0.19	2.28	2400	26.62	0.75	1.30	26
R128015DM	12	7~13.2	0.25	3.00	3000	33.27	0.94	2.03	31
R128015DH	12	7~13.2	0.32	3.84	3600	38.80	1.1	2.76	36
R128015DU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	42
R128015SL	12	7~13.2	0.19	2.28	2400	26.62	0.75	1.30	26
R128015SM	12	7~13.2	0.25	3.00	3000	33.27	0.94	2.03	31
R128015SH	12	7~13.2	0.32	3.84	3600	38.80	1.1	2.76	36
R128015SU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	42

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type : Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U
24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 43g

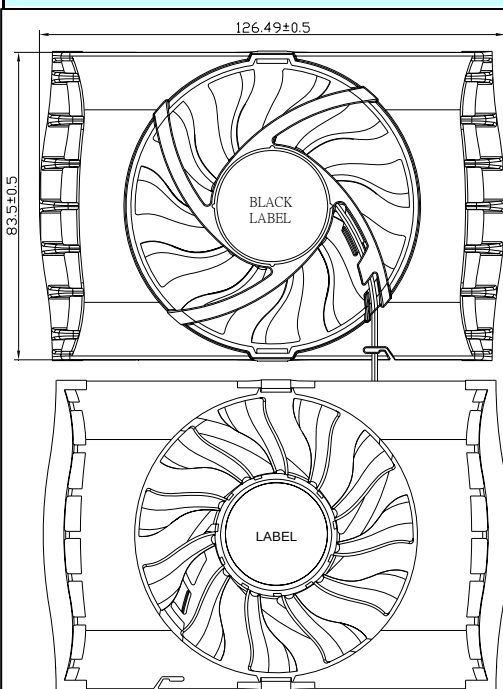

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

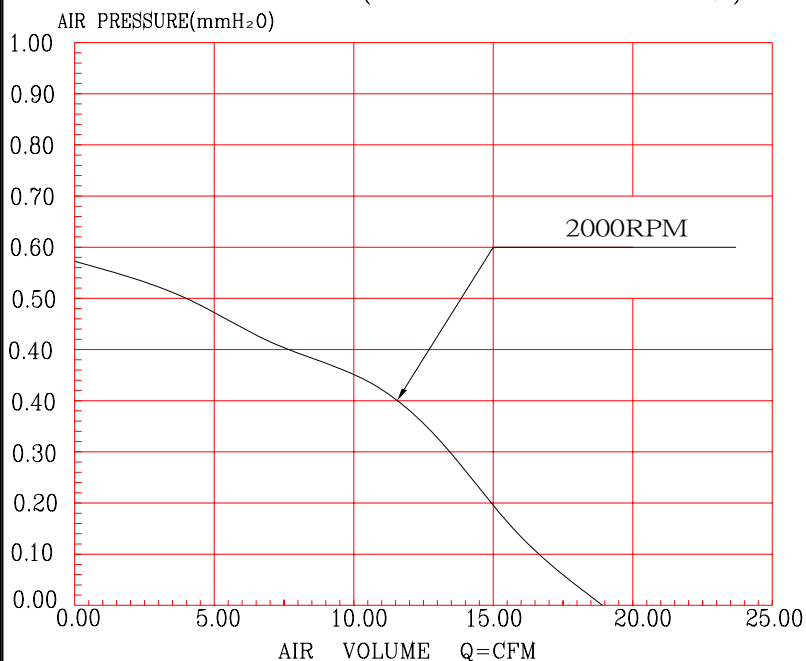

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
R128015BL	12	7~13.2	0.19	2.28	2000	18.16	0.51	0.57	27
R128015SL	12	7~13.2	0.19	2.28	2000	18.16	0.51	0.57	27

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type : Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U
24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 44g

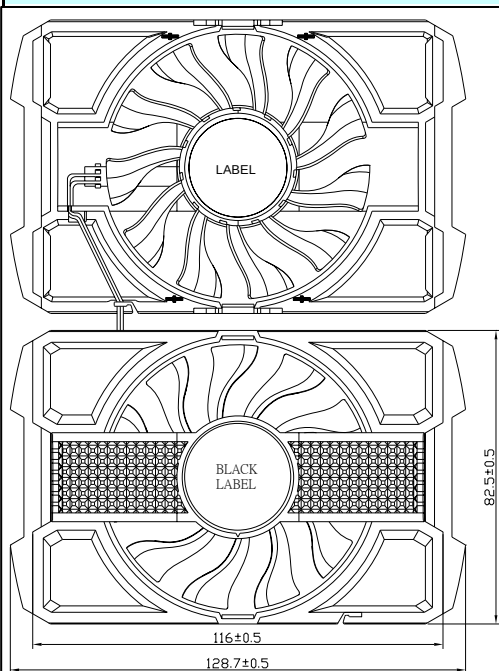

AIR FLOW—AIR PRESSURE (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

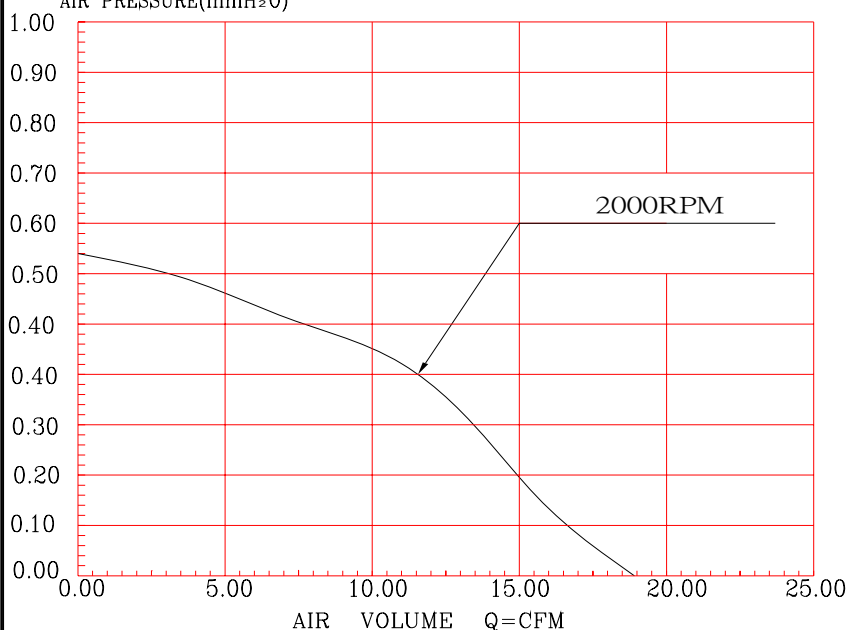

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
R128015BL	12	7~13.2	0.19	2.28	2000	18.96	0.54	0.64	28
R128015SL	12	7~13.2	0.19	2.28	2000	18.96	0.54	0.64	28

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 53g

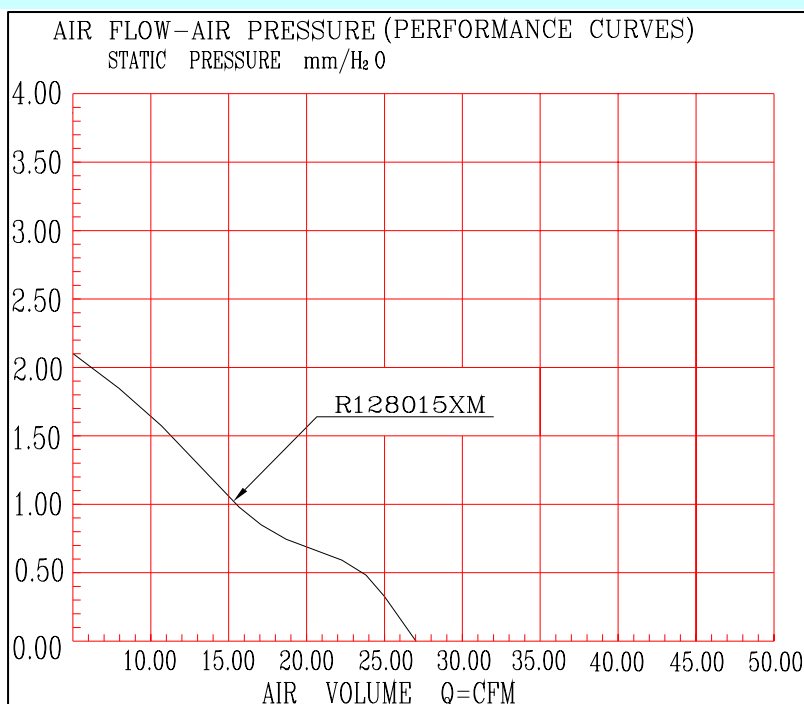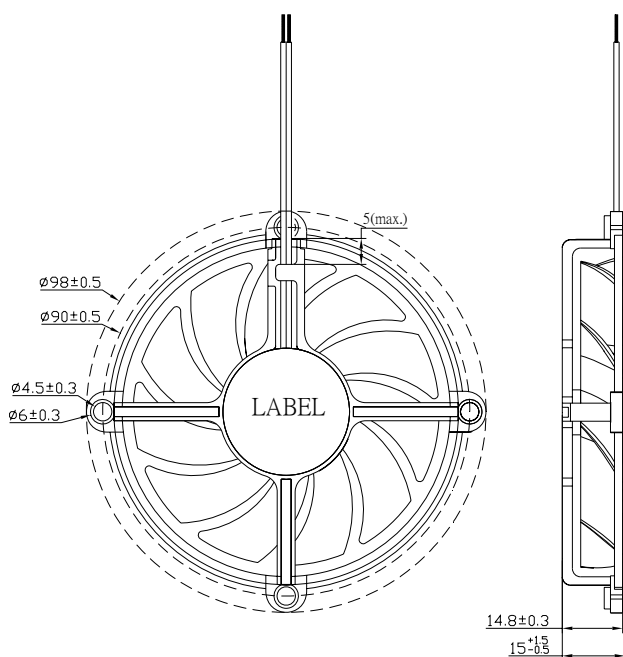

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015*M	12	7~13.2	0.25	3.00	3000	27.12	0.77	2.10	30.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 53g

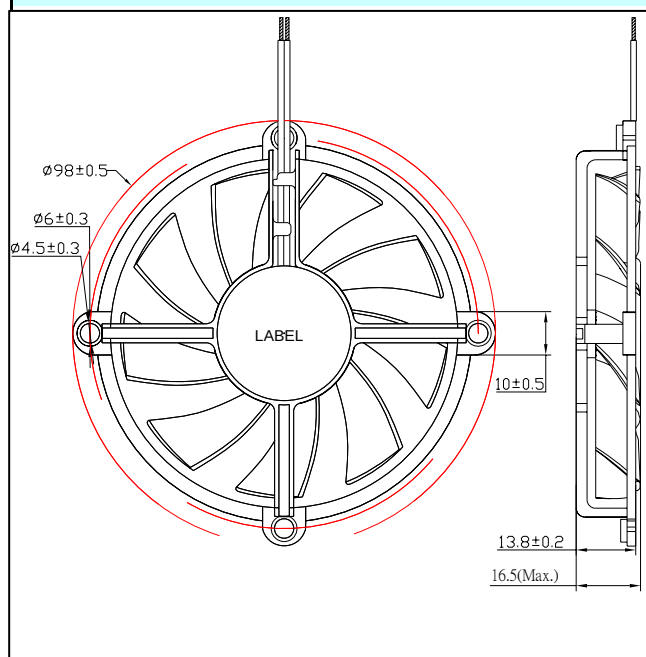

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

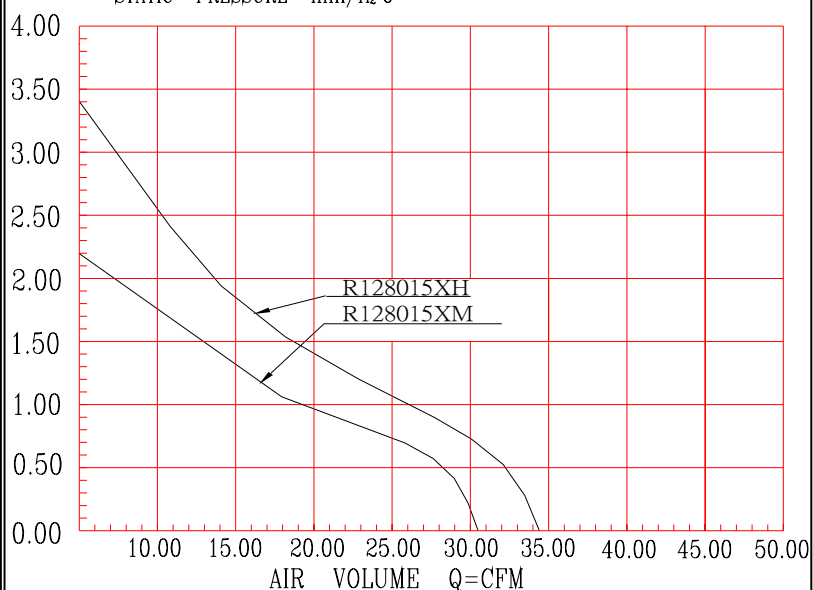

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015*M	12	7~13.2	0.25	3.00	3000	30.06	0.85	2.20	30.8
R128015*H	12	7~13.2	0.32	3.84	3600	34.45	0.98	3.47	36

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 34g

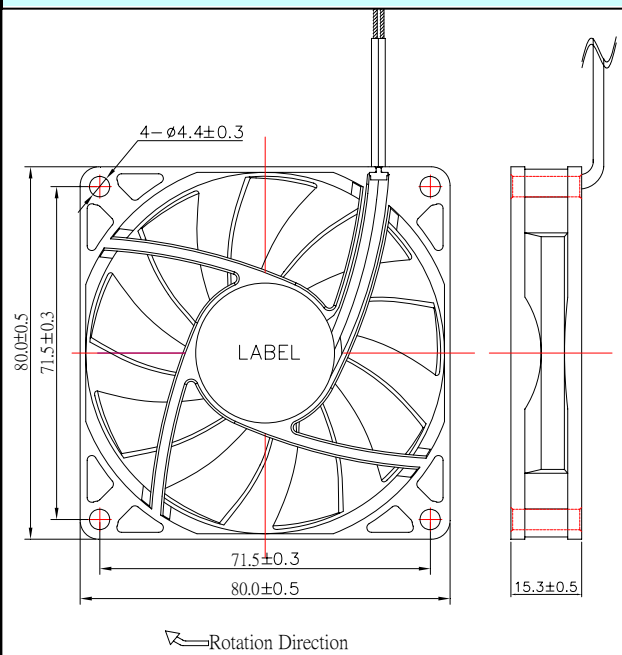

AIR FLOW—AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

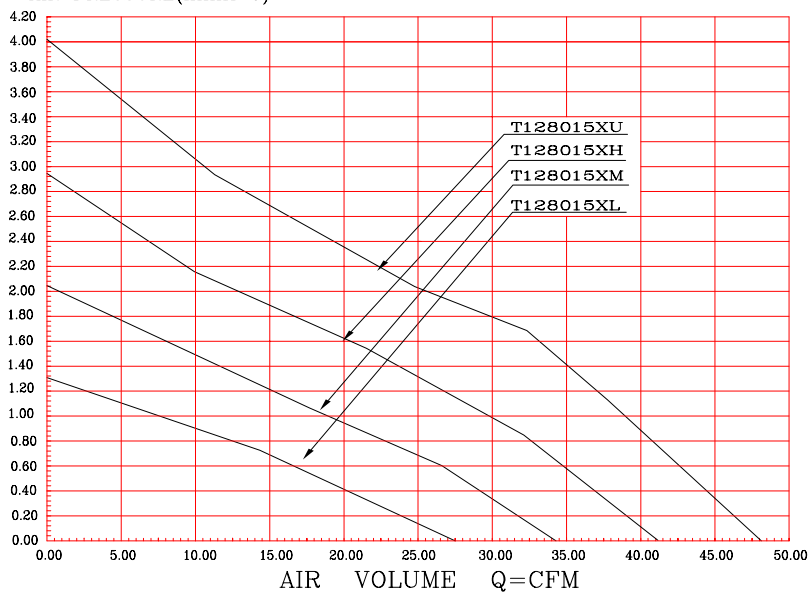

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T128015BL	12	7~13.2	0.19	2.28	2400	28.60	0.81	1.30	26.3
T128015BM	12	7~13.2	0.25	3.00	3000	35.42	1.00	2.25	32.1
T128015BH	12	7~13.2	0.32	3.84	3600	42.38	1.20	3.10	37.7
T128015BU	12	7~13.2	0.50	6.00	4200	50.28	1.42	4.12	42.0
T128015DL	12	7~13.2	0.19	2.28	2400	28.60	0.81	1.30	26.3
T128015DM	12	7~13.2	0.25	3.00	3000	35.42	1.00	2.25	32.1
T128015DH	12	7~13.2	0.32	3.84	3600	42.38	1.20	3.10	37.7
T128015DU	12	7~13.2	0.50	6.00	4200	50.28	1.42	4.12	42.0
T128015SL	12	7~13.2	0.19	2.28	2400	28.60	0.81	1.30	26.3
T128015SM	12	7~13.2	0.25	3.00	3000	35.42	1.00	2.25	32.1
T128015SH	12	7~13.2	0.32	3.84	3600	42.38	1.20	3.10	37.7

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 56g

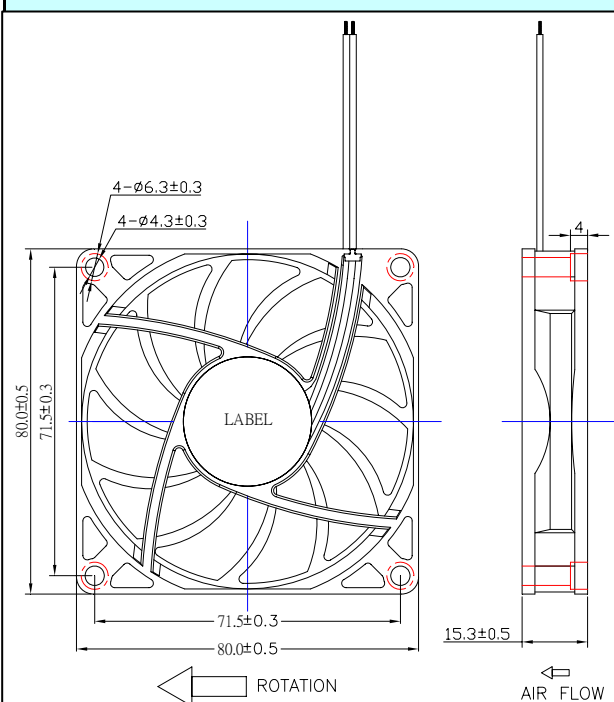

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

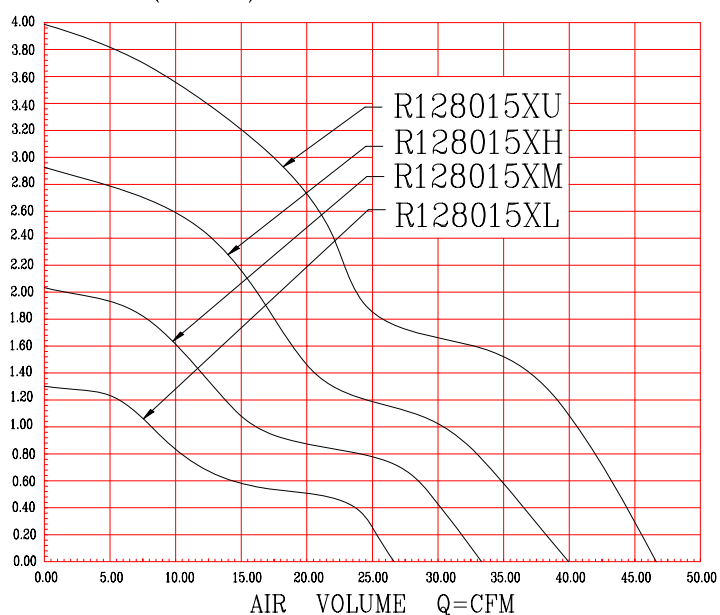

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	26.61	0.75	1.30	26.6
R128015BM	12	7~13.2	0.25	3.00	3000	33.27	0.94	2.03	31
R128015BH	12	7~13.2	0.32	3.84	3600	39.92	1.13	2.93	36.8
R128015BU	12	7~13.2	0.50	6.00	4200	46.57	1.32	3.99	39.9
R128015DL	12	7~13.2	0.19	2.28	2400	26.61	0.75	1.30	26.6
R128015DM	12	7~13.2	0.25	3.00	3000	33.27	0.94	2.03	31
R128015DH	12	7~13.2	0.32	3.84	3600	39.92	1.13	2.93	36.8
R128015DU	12	7~13.2	0.50	6.00	4200	46.57	1.32	3.99	39.9
R128015SL	12	7~13.2	0.19	2.28	2400	26.61	0.75	1.30	26.6
R128015SM	12	7~13.2	0.25	3.00	3000	33.27	0.94	2.03	31
R128015SH	12	7~13.2	0.32	3.84	3600	39.92	1.13	2.93	36.8
R128015SU	12	7~13.2	0.50	6.00	4200	46.57	1.32	3.99	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×18MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 56g

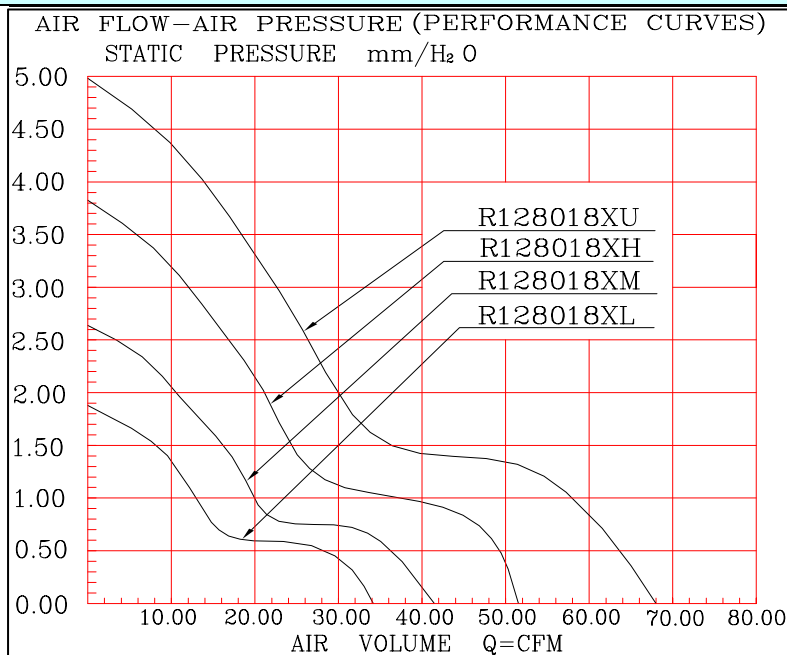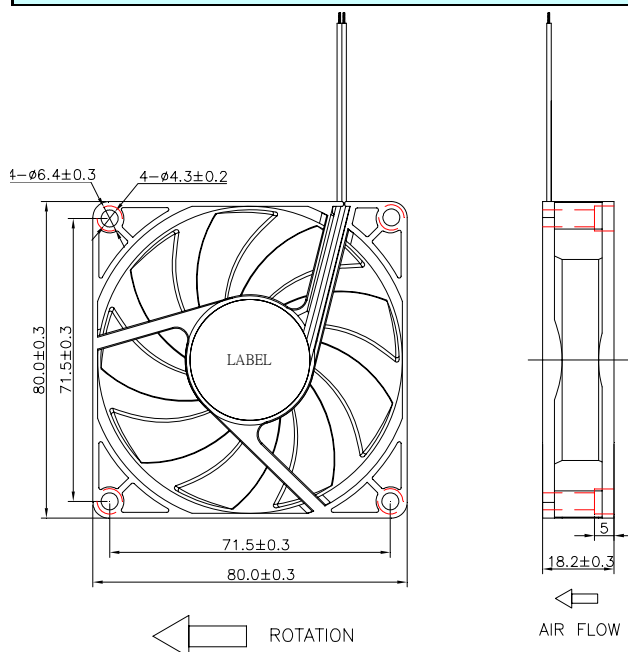

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128018BL	12	7~13.2	0.19	2.28	2400	35.04	0.99	1.88	26.9
R128018BM	12	7~13.2	0.25	3.00	3000	41.32	1.17	2.63	32.5
R128018BH	12	7~13.2	0.32	3.84	3600	51.65	1.46	3.82	36.9
R128018BU	12	7~13.2	0.50	6.00	4200	60.80	1.72	5.00	41.2
R128018DL	12	7~13.2	0.19	2.28	2400	35.04	0.99	1.88	26.9
R128018DM	12	7~13.2	0.25	3.00	3000	41.32	1.17	2.63	32.5
R128018DH	12	7~13.2	0.32	3.84	3600	51.65	1.46	3.82	36.9
R128018DU	12	7~13.2	0.50	6.00	4200	60.80	1.72	5.00	41.2
R128018SL	12	7~13.2	0.19	2.28	2400	35.04	0.99	1.88	26.9
R128018SM	12	7~13.2	0.25	3.00	3000	41.32	1.17	2.63	32.5
R128018SH	12	7~13.2	0.32	3.84	3600	51.65	1.46	3.82	36.9
R128018SU	12	7~13.2	0.50	6.00	4200	60.80	1.72	5.00	41.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×20MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 55g

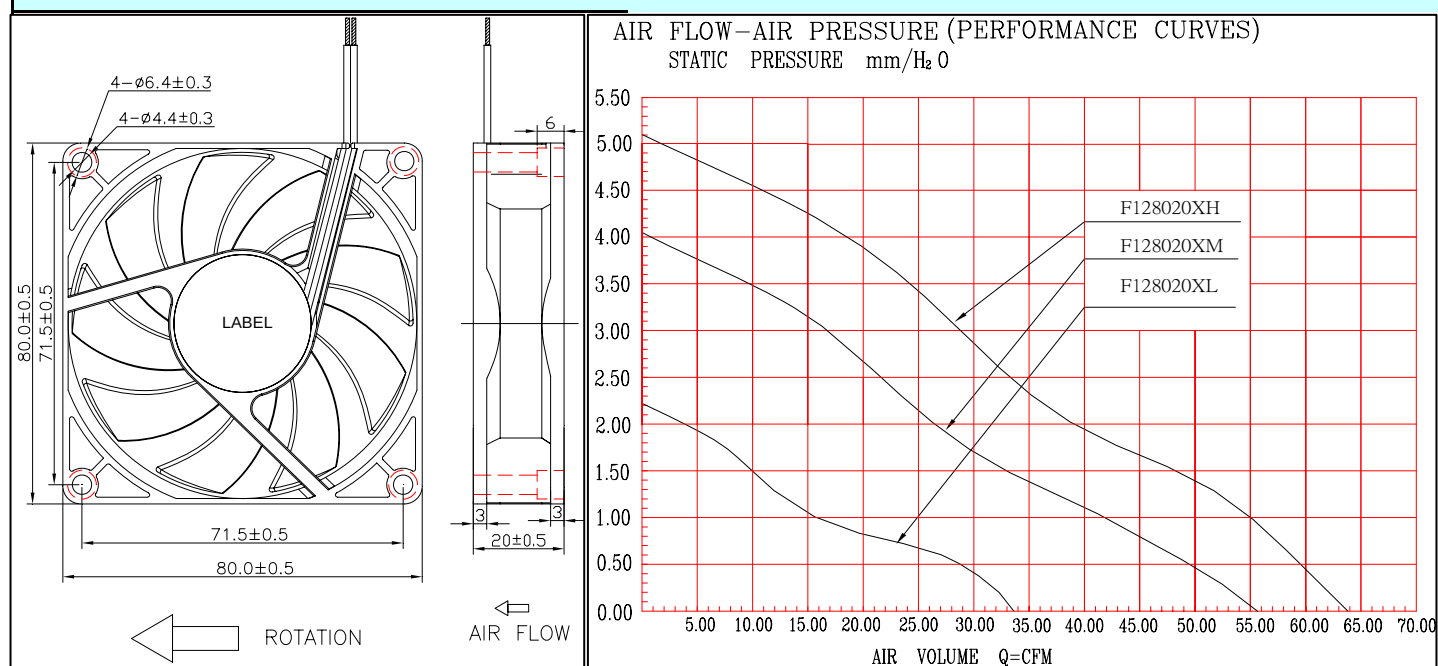

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128020BL	12	7~13.2	0.20	2.40	2400	33.70	0.95	2.21	
R128020BM	12	7~13.2	0.40	4.80	3600	55.61	1.58	4.05	39
R128020BH	12	7~13.2	0.55	6.6	4200	63.81	1.81	5.1	42.8
R128020DL	12	7~13.2	0.20	2.40	2400	33.70	0.95	2.21	
R128020DM	12	7~13.2	0.40	4.80	3600	55.61	1.58	4.05	39
R128020DH	12	7~13.2	0.55	6.6	4200	63.81	1.81	5.1	42.8
R128020SL	12	7~13.2	0.20	2.40	2400	33.70	0.95	2.21	
R128020SM	12	7~13.2	0.40	4.80	3600	55.61	1.58	4.05	39
R128020SH	12	7~13.2	0.55	6.6	4200	63.81	1.81	5.1	42.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×20MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 55g

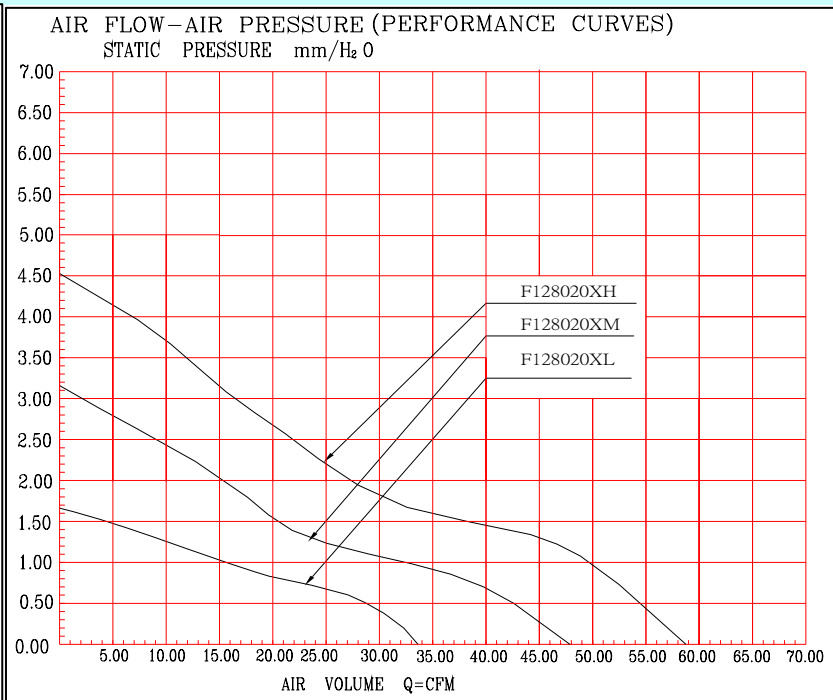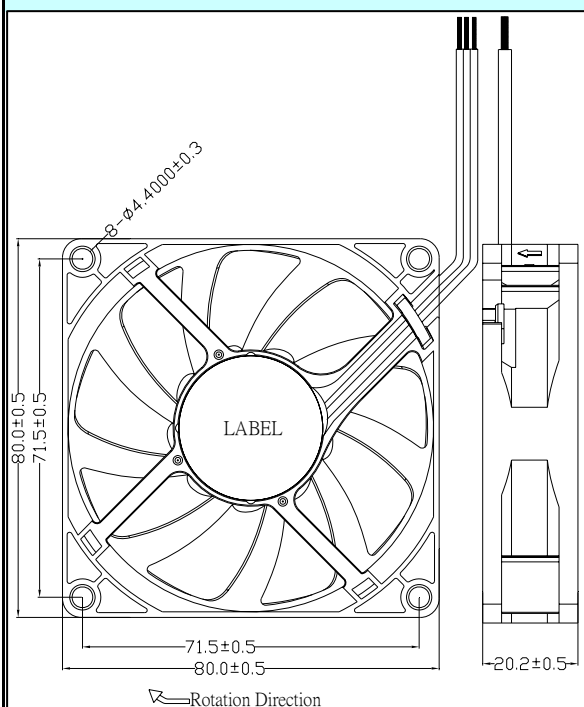

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128020BL	12	7~13.2	0.20	2.40	2400	33.70	0.95	1.66	27.6
F128020BM	12	7~13.2	0.40	4.80	3600	47.80	1.35	3.17	36.3
F128020BH	12	7~13.2	0.55	6.6	4200	58.80	1.67	4.52	41.5
F128020DL	12	7~13.2	0.20	2.40	2400	33.70	0.95	1.66	27.6
F128020DM	12	7~13.2	0.40	4.80	3600	47.80	1.35	3.17	36.3
F128020DH	12	7~13.2	0.55	6.6	4200	58.80	1.67	4.52	41.5
F128020SL	12	7~13.2	0.20	2.40	2400	33.70	0.95	1.66	27.6
F128020SM	12	7~13.2	0.40	4.80	3600	47.80	1.35	3.17	36.3
F128020SH	12	7~13.2	0.55	6.6	4200	58.80	1.67	4.52	41.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×20MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 55g

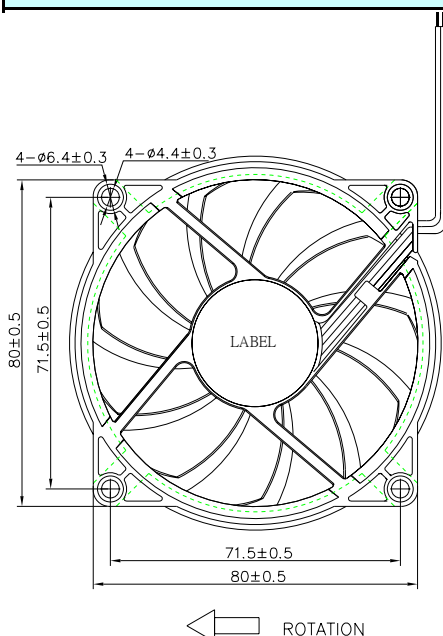

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

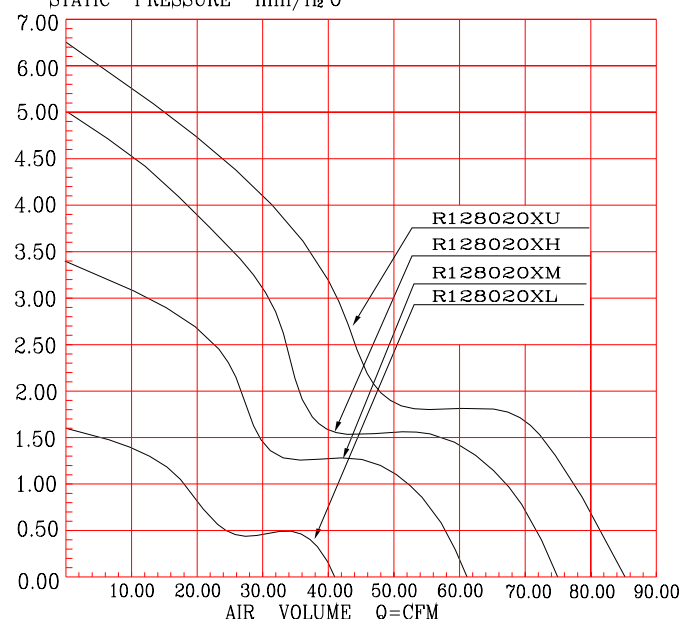

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128020BL	12	7~13.2	0.20	2.40	2400	41.10	1.16	1.51	27
R128020BM	12	7~13.2	0.40	4.80	3600	61.66	1.75	3.40	37.5
R128020BH	12	7~13.2	0.55	6.6	4200	75.10	2.13	5.00	42.2
R128020BU	12	7~13.2	1.00	12	4800	85.83	2.43	6.53	45
R128020DL	12	7~13.2	0.20	2.40	2400	41.10	1.16	1.51	27
R128020DM	12	7~13.2	0.40	4.80	3600	61.66	1.75	3.4	37.5
R128020DH	12	7~13.2	0.55	6.6	4200	75.10	2.13	5.00	42.2
R128020BU	12	7~13.2	1.00	12	4800	85.83	2.43	6.53	45
R128020SL	12	7~13.2	0.20	2.40	2400	41.10	1.16	1.51	27
R128020SM	12	7~13.2	0.40	4.80	3600	61.66	1.75	3.4	37.5
R128020SH	12	7~13.2	0.55	6.6	4200	75.10	2.13	5.00	42.2
R128020BU	12	7~13.2	1.00	12	4800	85.83	2.43	6.53	45

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 82g

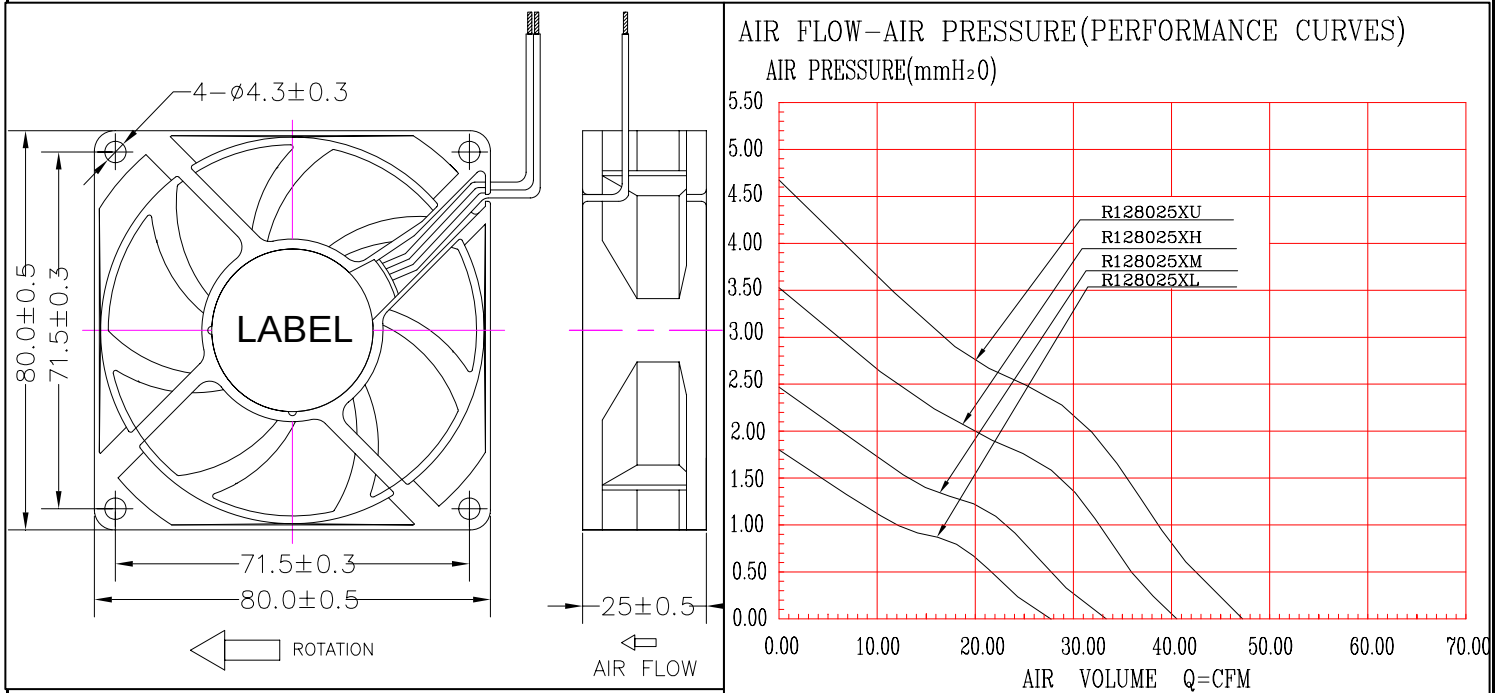

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	27.61	0.78	1.80	26
R128025BM	12	7~13.2	0.14	1.68	2400	33.40	0.95	2.47	29
R128025BH	12	7~13.2	0.19	2.28	2900	40.51	1.15	3.56	32.5
R128025BU	12	7~13.2	0.24	2.88	3400	47.48	1.35	4.67	36.5
R128025DL	12	7~13.2	0.10	1.20	2050	27.61	0.78	1.80	26
R128025DM	12	7~13.2	0.14	1.68	2400	33.40	0.95	2.47	29
R128025DH	12	7~13.2	0.19	2.28	2900	40.51	1.15	3.56	32.5
R128025DU	12	7~13.2	0.24	2.88	3400	47.48	1.35	4.67	36.5
R128025SL	12	7~13.2	0.09	1.08	2050	27.61	0.78	1.80	26
R128025SM	12	7~13.2	0.14	1.68	2400	33.40	0.95	2.47	29
R128025SH	12	7~13.2	0.19	2.28	2900	40.51	1.15	3.56	32.5
R128025SU	12	7~13.2	0.28	3.36	3400	47.48	1.35	4.67	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

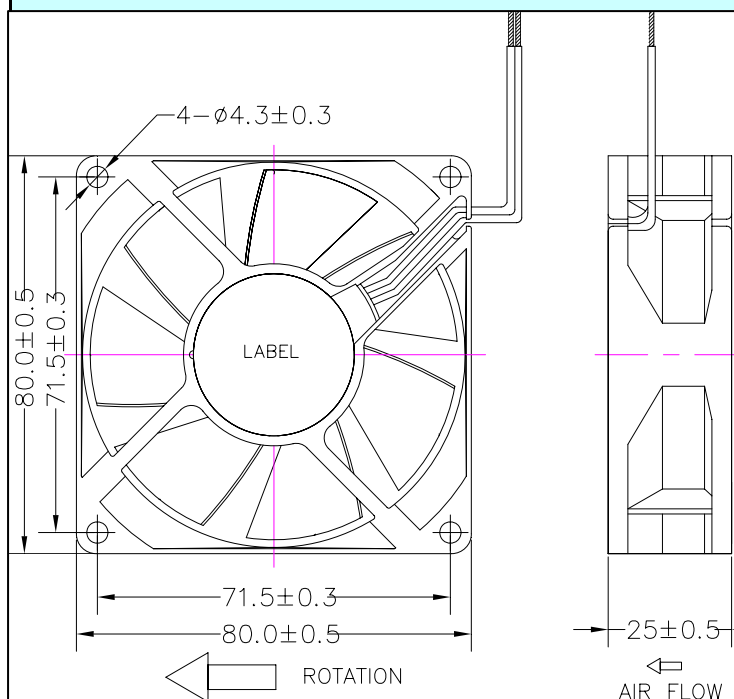

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

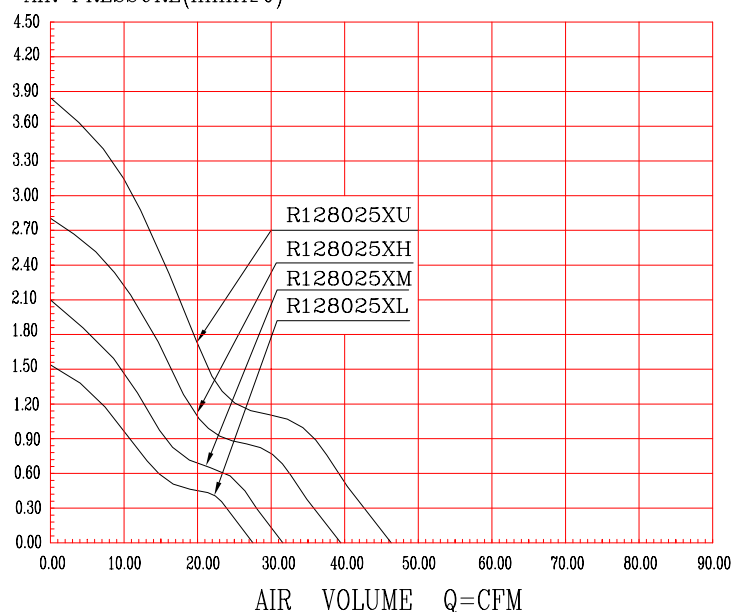

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	27.06	0.77	1.53	25.5
R128025BM	12	7~13.2	0.14	1.68	2400	31.68	0.90	2.10	28.7
R128025BH	12	7~13.2	0.19	2.28	2900	39.39	1.12	2.80	32.5
R128025BU	12	7~13.2	0.24	2.88	3400	46.18	1.31	3.85	35.3
R128025DL	12	7~13.2	0.10	1.20	2050	27.06	0.77	1.53	25.5
R128025DM	12	7~13.2	0.14	1.68	2400	31.68	0.90	2.10	28.7
R128025DH	12	7~13.2	0.19	2.28	2900	39.39	1.12	2.80	32.5
R128025DU	12	7~13.2	0.24	2.88	3400	46.18	1.31	3.85	35.3
R128025SL	12	7~13.2	0.09	1.08	2050	27.06	0.77	1.53	25.5
R128025SM	12	7~13.2	0.14	1.68	2400	31.68	0.90	2.10	28.7
R128025SH	12	7~13.2	0.19	2.28	2900	39.39	1.12	2.80	32.5
R128025SU	12	7~13.2	0.28	3.36	3400	46.18	1.31	3.85	35.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U 24v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

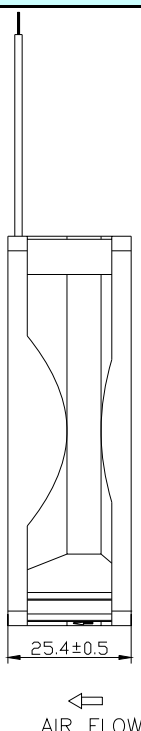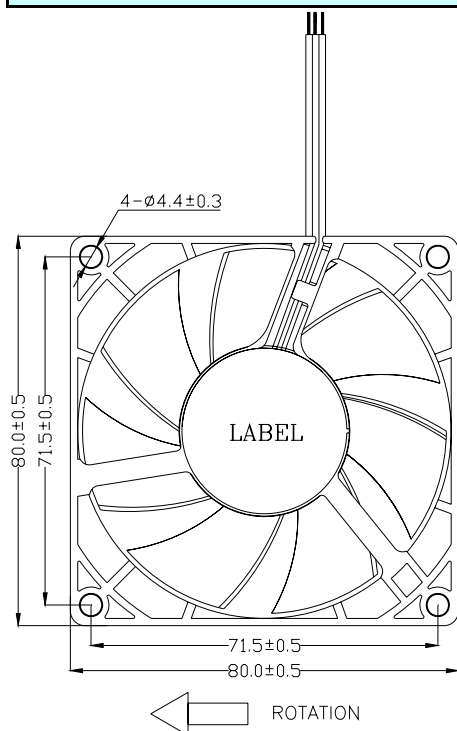

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

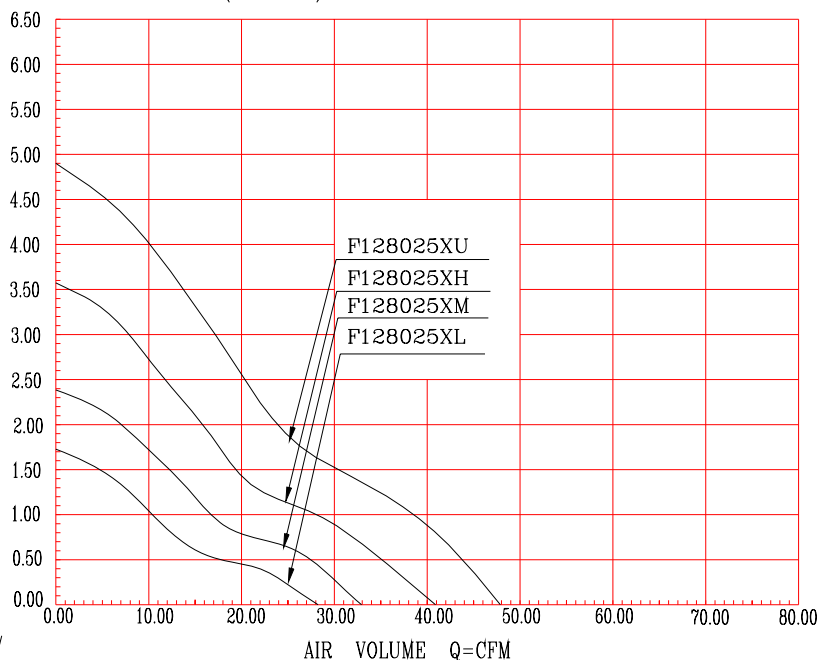

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	28.18	0.80	1.73	26
R128025BM	12	7~13.2	0.14	1.68	2400	32.99	0.93	2.37	29.8
R128025BH	12	7~13.2	0.19	2.28	2900	40.83	1.16	3.57	35.9
R128025BU	12	7~13.2	0.24	2.88	3400	47.87	1.36	4.90	39.2
R128025DL	12	7~13.2	0.10	1.20	2050	28.18	0.80	1.73	26
R128025DM	12	7~13.2	0.14	1.68	2400	32.99	0.93	2.37	29.8
R128025DH	12	7~13.2	0.19	2.28	2900	40.83	1.16	3.57	35.9
R128025DU	12	7~13.2	0.24	2.88	3400	47.87	1.36	4.90	39.2
R128025SL	12	7~13.2	0.09	1.08	2050	28.18	0.80	1.73	26
R128025SM	12	7~13.2	0.14	1.68	2400	32.99	0.93	2.37	29.8
R128025SH	12	7~13.2	0.19	2.28	2900	40.83	1.16	3.57	35.9
R128025SU	12	7~13.2	0.28	3.36	3400	47.87	1.36	4.90	39.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

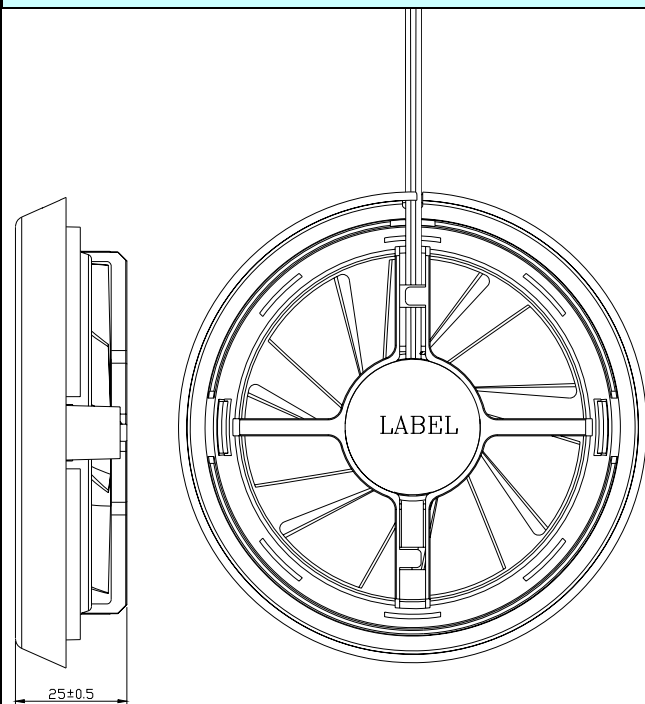

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

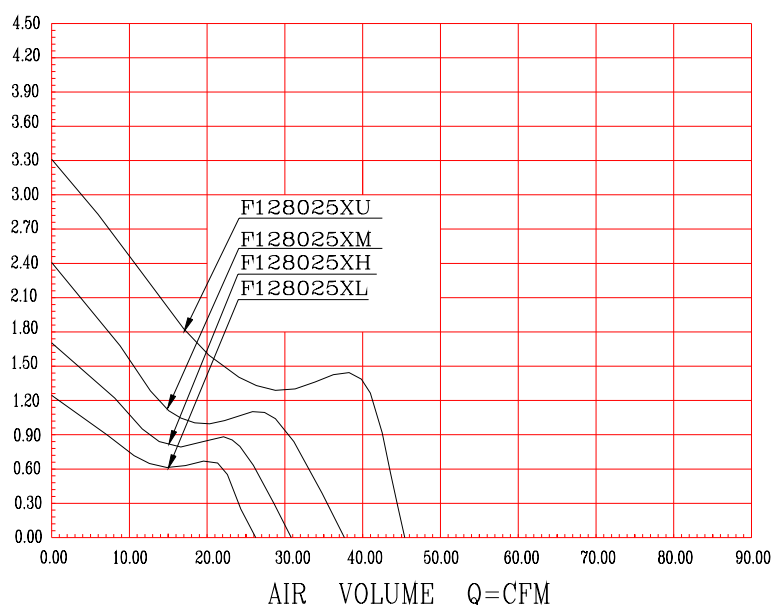

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	26.31	0.75	1.24	23
R128025BM	12	7~13.2	0.14	1.68	2400	30.81	0.87	1.70	27.1
R128025BH	12	7~13.2	0.19	2.28	2900	38.61	1.09	2.41	31.3
R128025BU	12	7~13.2	0.24	2.88	3400	45.26	1.28	3.32	35.1
R128025DL	12	7~13.2	0.10	1.20	2050	26.31	0.75	1.24	23
R128025DM	12	7~13.2	0.14	1.68	2400	30.81	0.87	1.70	27.1
R128025DH	12	7~13.2	0.19	2.28	2900	38.61	1.09	2.41	31.3
R128025DU	12	7~13.2	0.24	2.88	3400	45.26	1.28	3.32	35.1
R128025SL	12	7~13.2	0.09	1.08	2050	26.31	0.75	1.24	23
R128025SM	12	7~13.2	0.14	1.68	2400	30.81	0.87	1.70	27.1
R128025SH	12	7~13.2	0.19	2.28	2900	38.61	1.09	2.41	31.3
R128025SU	12	7~13.2	0.28	3.36	3400	45.26	1.28	3.32	35.1

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

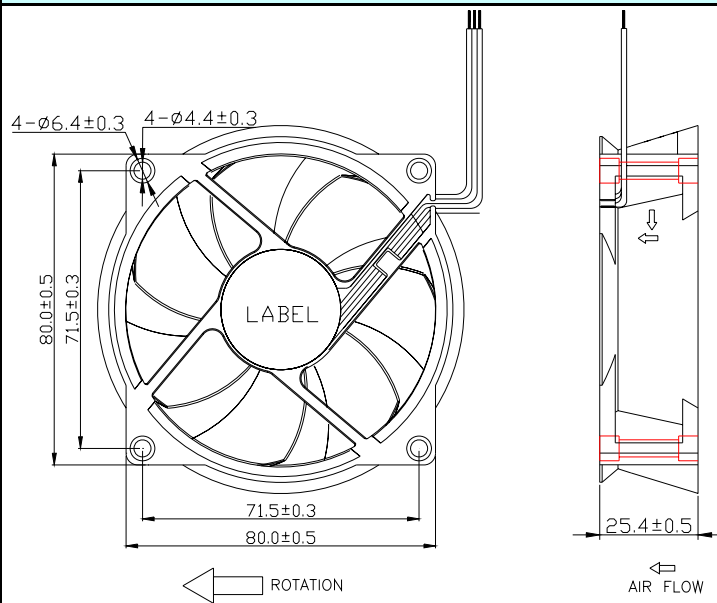

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

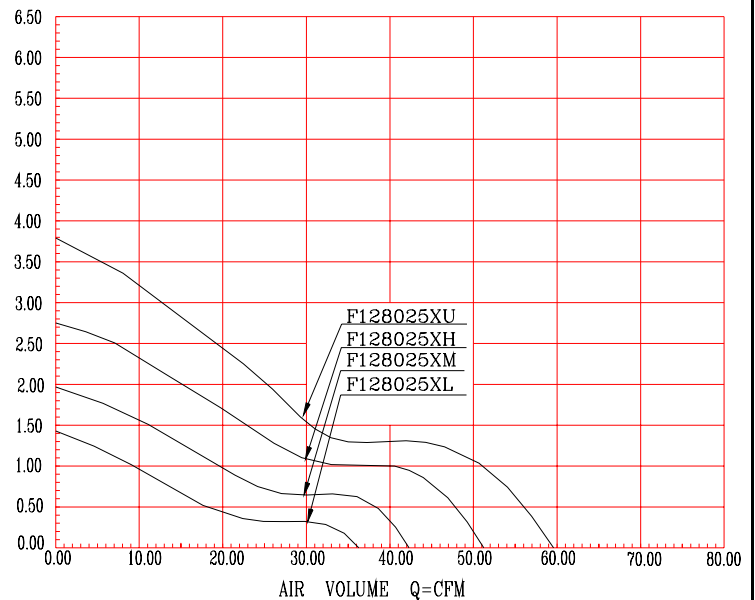

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	36.12	1.02	1.43	23.7
F128025BM	12	7~13.2	0.14	1.68	2400	42.29	1.20	1.96	28.8
F128025BH	12	7~13.2	0.19	2.28	2900	51.16	1.45	2.75	32.3
F128025BU	12	7~13.2	0.24	2.88	3400	59.53	1.69	3.78	38.5
F128025DL	12	7~13.2	0.10	1.20	2050	36.12	1.02	1.43	23.7
F128025DM	12	7~13.2	0.14	1.68	2400	42.29	1.20	1.96	28.8
F128025DH	12	7~13.2	0.19	2.28	2900	51.16	1.45	2.75	32.3
F128025DU	12	7~13.2	0.24	2.88	3400	59.53	1.69	3.78	38.5
F128025SL	12	7~13.2	0.09	1.08	2050	36.12	1.02	1.43	23.7
F128025SM	12	7~13.2	0.14	1.68	2400	42.29	1.20	1.96	28.8
F128025SH	12	7~13.2	0.19	2.28	2900	51.16	1.45	2.75	32.3

F128025SU	12	7~13.2	0.28	3.36	3400	59.53	1.69	3.78	38.5
-----------	----	--------	------	------	------	-------	------	------	------

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

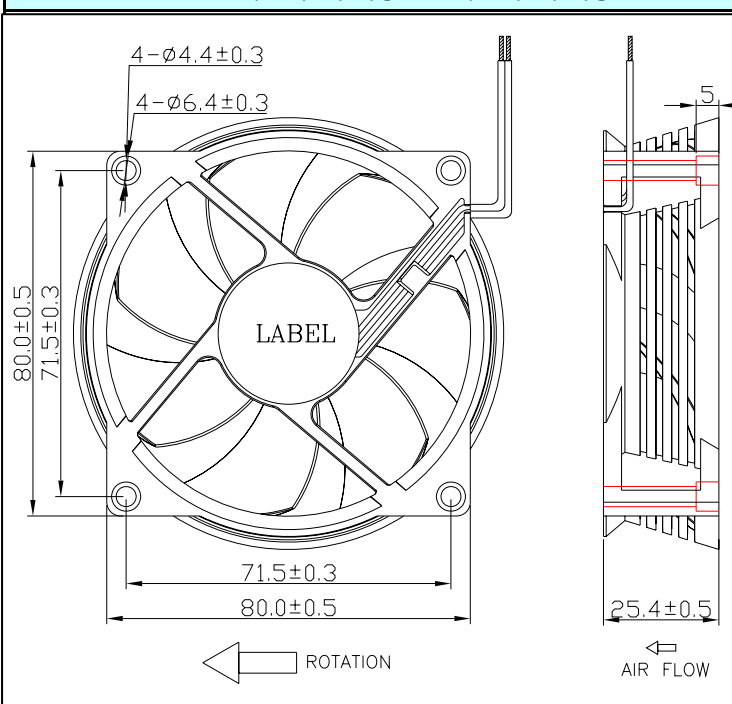

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

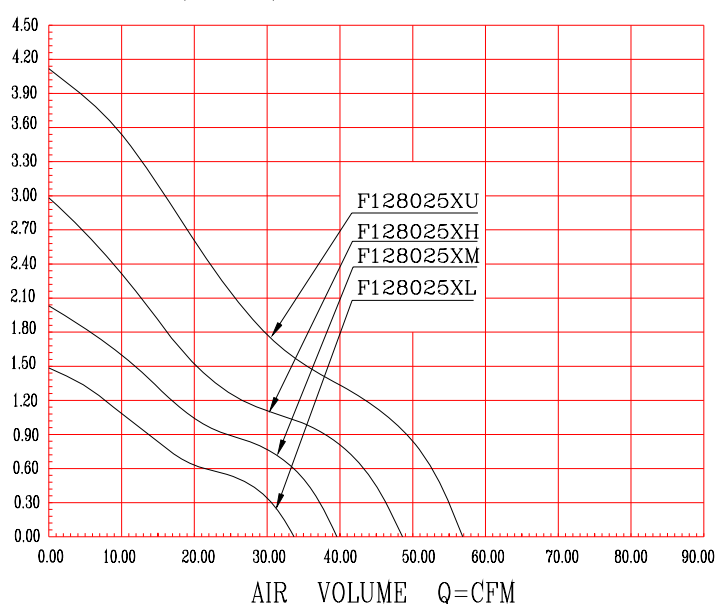

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	33.80	0.96	1.48	21.9
F128025BM	12	7~13.2	0.14	1.68	2400	39.57	1.12	2.03	25.3
F128025BH	12	7~13.2	0.19	2.28	2900	48.60	1.38	2.99	30.5
F128025BU	12	7~13.2	0.24	2.88	3400	56.98	1.61	4.11	36.1
F128025DL	12	7~13.2	0.10	1.20	2050	33.80	0.96	1.48	21.9
F128025DM	12	7~13.2	0.14	1.68	2400	39.57	1.12	2.03	25.3
F128025DH	12	7~13.2	0.19	2.28	2900	48.60	1.38	2.99	30.5
F128025DU	12	7~13.2	0.24	2.88	3400	56.98	1.61	4.11	36.1
F128025SL	12	7~13.2	0.09	1.08	2050	33.80	0.96	1.48	21.9
F128025SM	12	7~13.2	0.14	1.68	2400	39.57	1.12	2.03	25.3
F128025SH	12	7~13.2	0.19	2.28	2900	48.60	1.38	2.99	30.5
F128025SU	12	7~13.2	0.28	3.36	3400	56.98	1.61	4.11	36.1

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

Impeller Plastic (UL : 94V-0)

EBR

Protection : Auto-Restart /Impedance


One Ball One Sleeve Bearing

Operating Temp : ~10~70°C


Rated Voltage 5v L.M.H.U

Weight : 74g

12v L.M.H.U 24v L.M.H.U

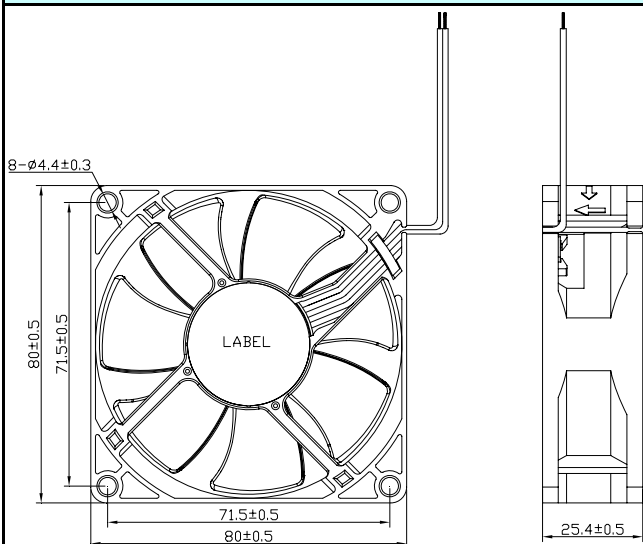

AIR FLOW—AIR PRESSURE (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

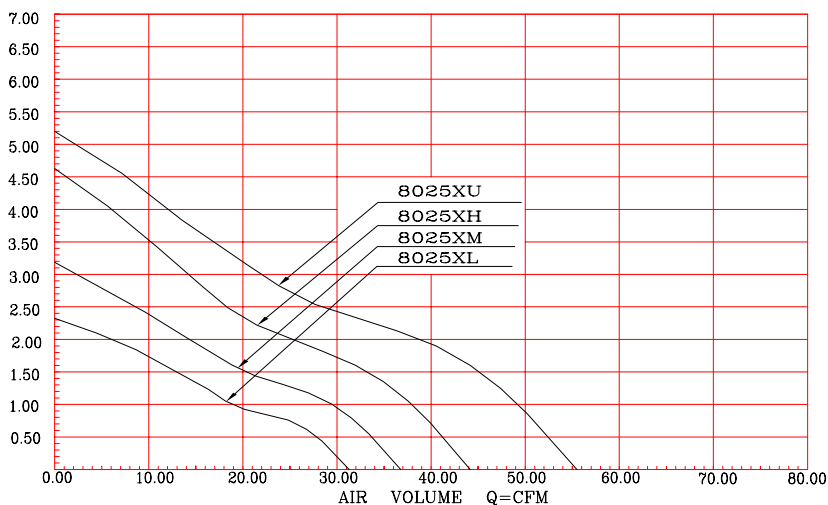

此基架模具有:8個螺絲孔及4個螺絲孔.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	29.10	0.82	1.80	23.2
F128025BM	12	7~13.2	0.14	1.68	2400	34.35	0.97	2.46	25.8
F128025BH	12	7~13.2	0.19	2.28	2900	41.30	1.17	3.35	32.6
F128025BU	12	7~13.2	0.24	2.88	3400	49.52	1.40	4.66	35.5
F128025DL	12	7~13.2	0.10	1.20	2050	29.10	0.82	1.80	23.2
F128025DM	12	7~13.2	0.14	1.68	2400	34.35	0.97	2.46	25.8
F128025DH	12	7~13.2	0.19	2.28	2900	41.30	1.17	3.35	32.6
F128025DU	12	7~13.2	0.24	2.88	3400	49.52	1.40	4.66	35.5
F128025SL	12	7~13.2	0.09	1.08	2050	29.10	0.82	1.80	23.2
F128025SM	12	7~13.2	0.14	1.68	2400	34.35	0.97	2.46	25.8
F128025SH	12	7~13.2	0.19	2.28	2900	41.30	1.17	3.35	32.6
F128025SU	12	7~13.2	0.28	3.36	3400	49.52	1.40	4.66	35.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.U

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 82g

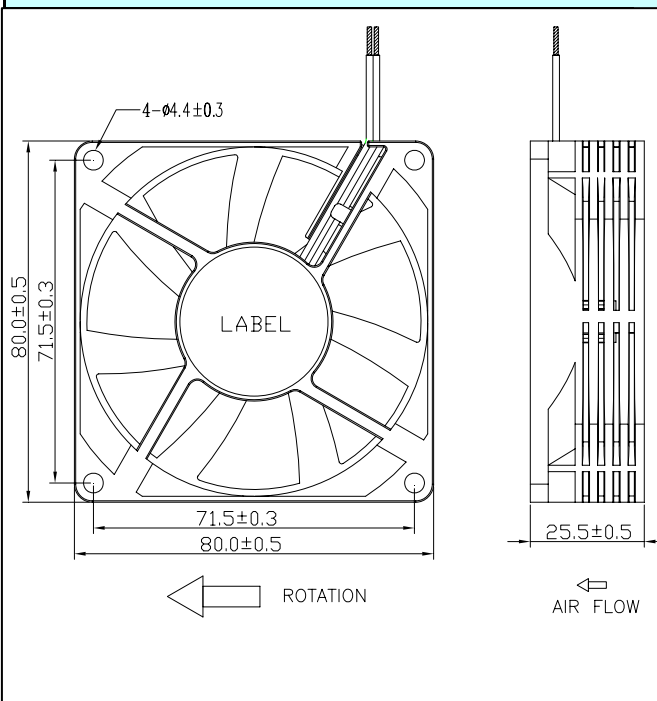

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

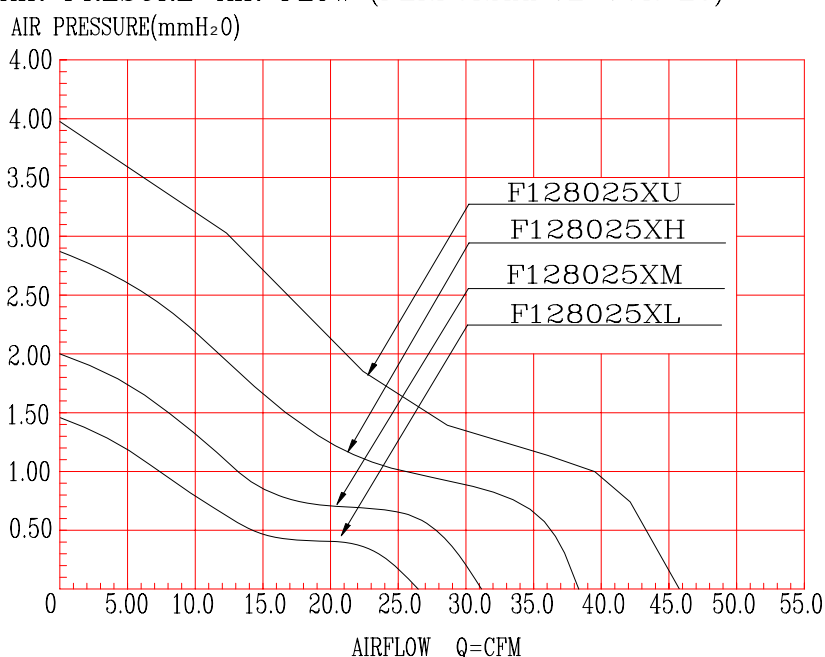

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	26.53	0.75	1.46	22.3
F128025BM	12	7~13.2	0.14	1.68	2400	31.05	0.88	2.00	26.4
F128025BH	12	7~13.2	0.19	2.28	2900	38.46	1.09	2.88	30.6
F128025BU	12	7~13.2	0.24	2.88	3400	45.09	1.28	3.96	34.7
F128025DL	12	7~13.2	0.10	1.20	2050	26.53	0.75	1.46	22.3
F128025DM	12	7~13.2	0.14	1.68	2400	31.05	0.88	2.00	26.4
F128025DH	12	7~13.2	0.19	2.28	2900	38.46	1.09	2.88	30.6
F128025DU	12	7~13.2	0.24	2.88	3400	45.09	1.28	3.96	34.7
F128025SL	12	7~13.2	0.09	1.08	2050	26.53	0.75	1.46	22.3
F128025SM	12	7~13.2	0.14	1.68	2400	31.05	0.88	2.00	26.4
F128025SH	12	7~13.2	0.19	2.28	2900	38.46	1.09	2.88	30.6
F128025SU	12	7~13.2	0.28	3.36	3400	45.09	1.28	3.96	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×32MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 100g

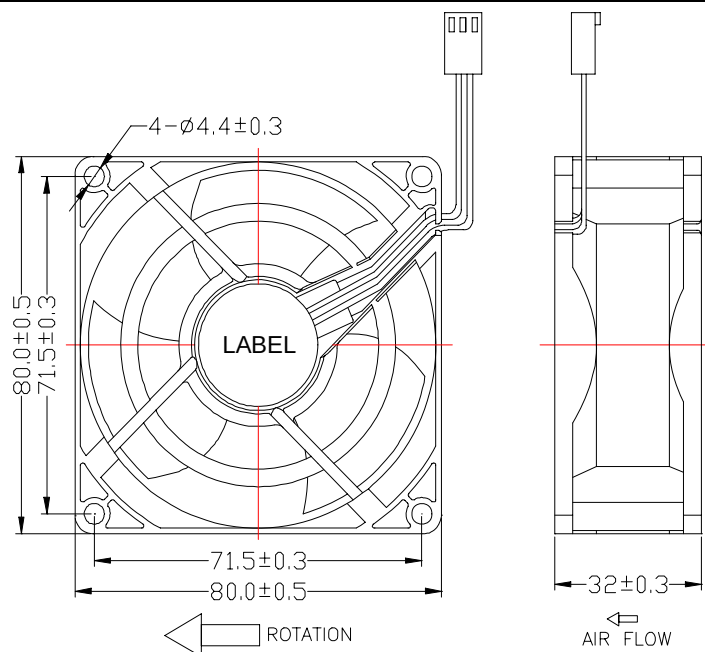

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

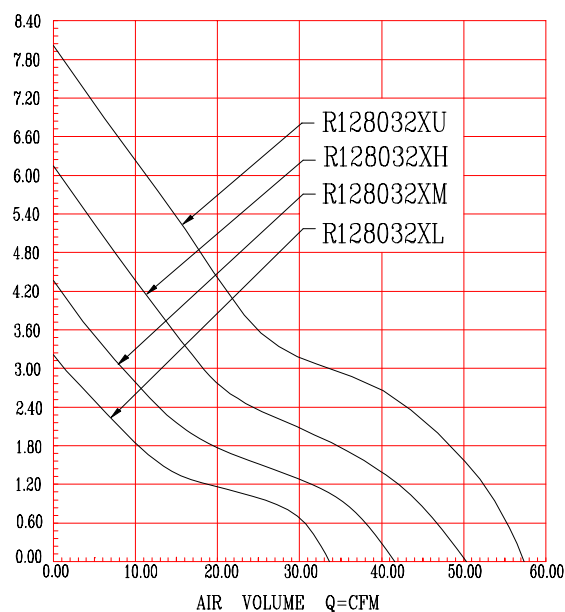

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128032BL	12	7~13.2	0.22	2.64	3000	33.74	0.96	3.22	27.8
R128032BM	12	7~13.2	0.30	3.60	3600	41.56	1.18	4.34	33.2
R128032BH	12	7~13.2	0.38	4.56	4200	50.16	1.42	6.14	38.7
R128032BU	12	7~13.2	0.45	5.40	4800	57.33	1.62	8.02	42.9
R128032DL	12	7~13.2	0.22	2.64	3000	33.74	0.96	3.22	27.8
R128032DM	12	7~13.2	0.30	3.60	3600	41.56	1.18	4.34	33.2
R128032DH	12	7~13.2	0.38	4.56	4200	50.16	1.42	6.14	38.7
R128032DU	12	7~13.2	0.45	5.40	4800	57.33	1.62	8.02	42.9
R128032SL	12	7~13.2	0.22	2.64	3000	33.74	0.96	3.22	27.8
R128032SM	12	7~13.2	0.30	3.60	3600	41.56	1.18	4.34	33.2
R128032SH	12	7~13.2	0.38	4.56	4200	50.16	1.42	6.14	38.7
R128032SU	12	7~13.2	0.45	5.40	4800	57.33	1.62	8.02	42.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 139g

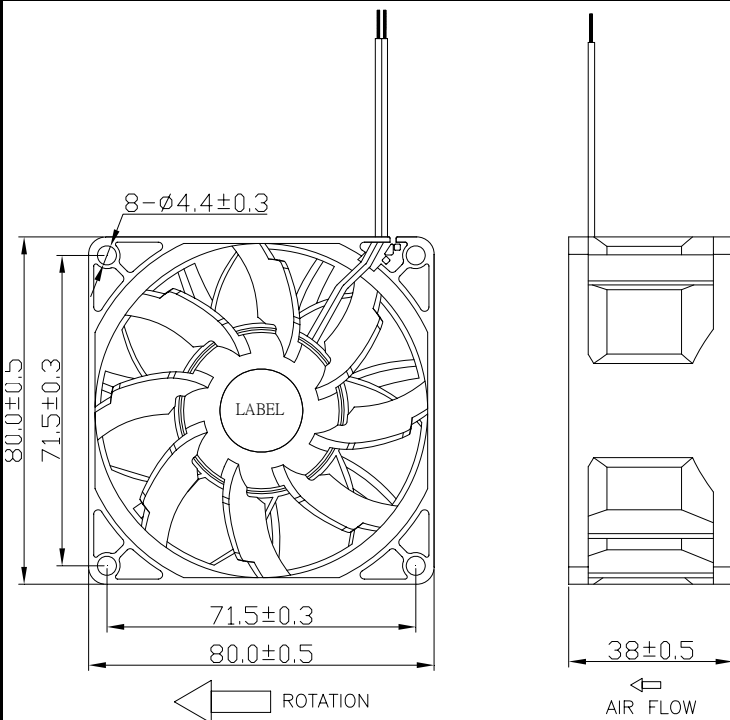

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

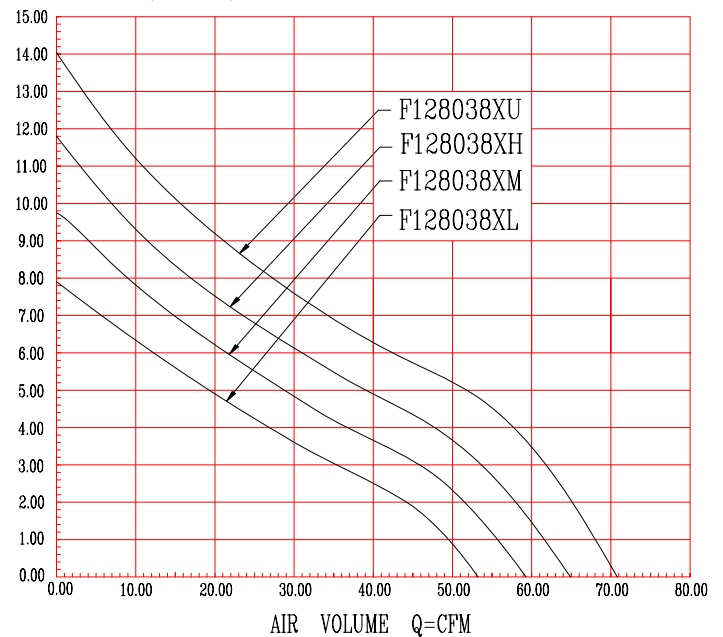

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128038BL	12	7~13.2	0.18	2.16	3000	35.41	1.00	3.51	36.6
F128038BM	12	7~13.2	0.25	3.00	3600	42.50	1.20	5.06	39.7
F128038BH	12	7~13.2	0.30	3.60	4200	49.58	1.40	6.88	42.5
F128038BU	12	7~13.2	0.50	6.00	4800	56.66	1.61	8.99	45.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×80MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12v .M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 105g

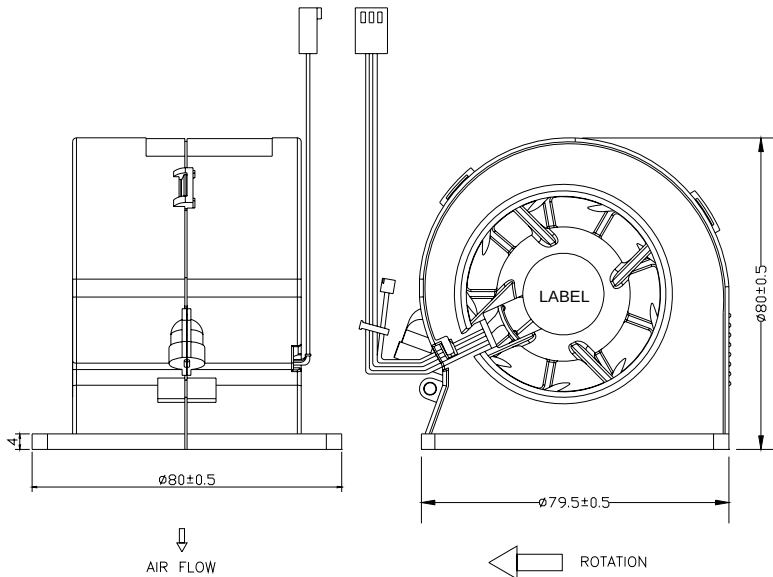

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

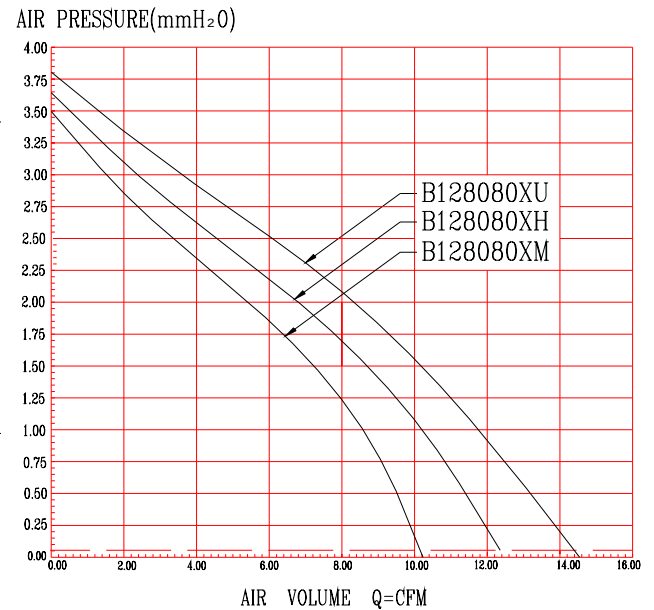

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		
B128080BM	12	7~13.2	0.20	2.40	2400	10.21	0.29	3.49	40.6
B128080BH	12	7~13.2	0.30	3.60	2900	12.37	0.35	3.65	43.6
B128080BU	12	7~13.2	1.00	12.00	3400	14.53	0.41	3.81	46.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×10MM SERIES

Bearing Type:

EBR

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 24g

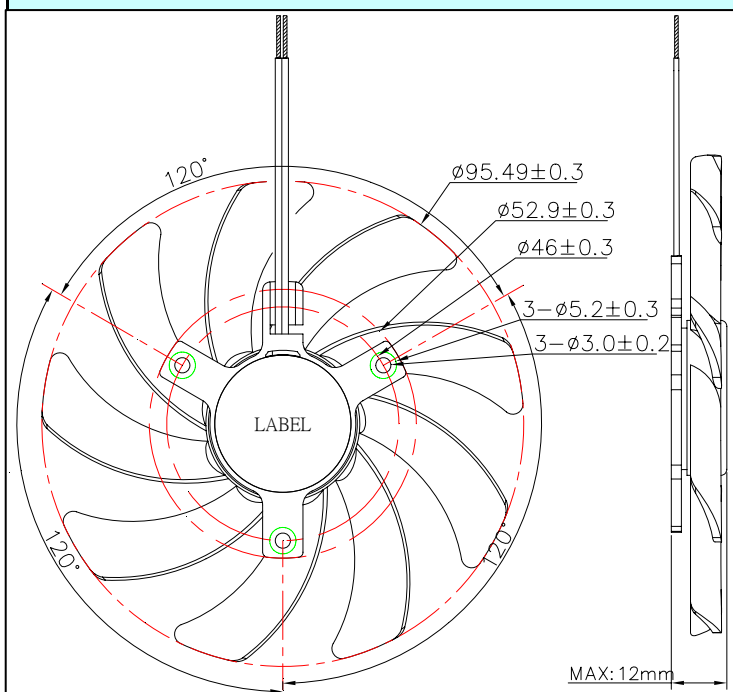

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

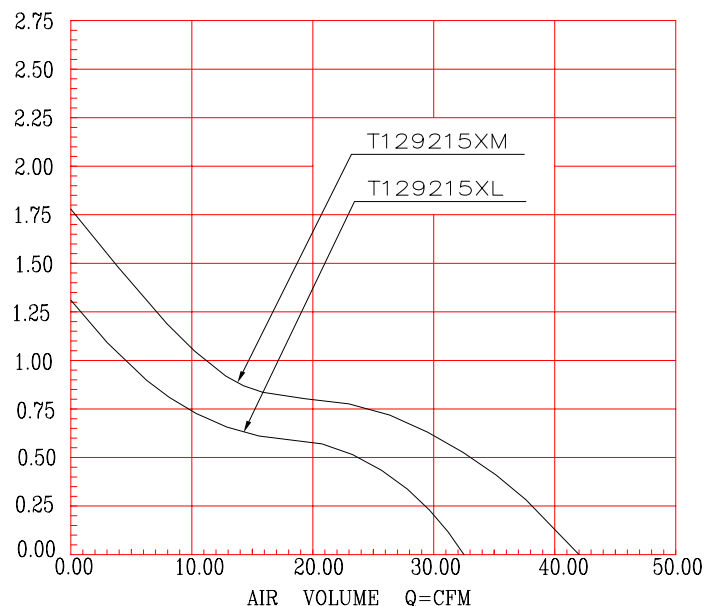

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215×L	12	7~13.2	0.20	2.40	2000	32.45	0.92	1.31	20.4
T129215×M	12	7~13.2	0.25	3.00	2500	42.00	1.19	1.78	25.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

T129215*H	12	7~13.2	0.30	3.60	3000	47.43	1.34	2.29	31.2
T129215*U	12	7~13.2	0.50	6.00	3500				

90×90×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 33g

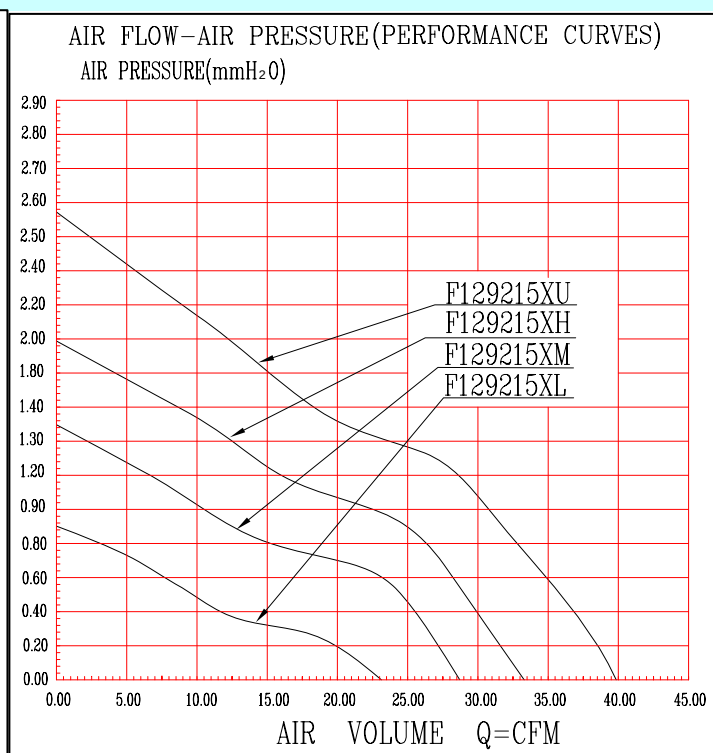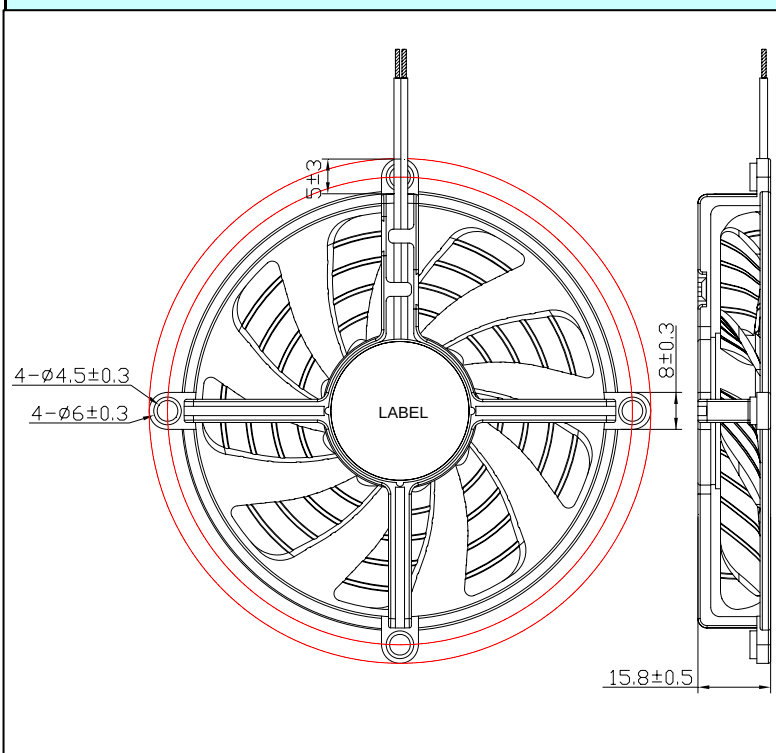

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129215BL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
F129215BM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
F129215BH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
F129215BU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35
F129215DL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
F129215DM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
F129215DH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
F129215DU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35
F129215SL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
F129215SM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
F129215SH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
F129215SU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 32g

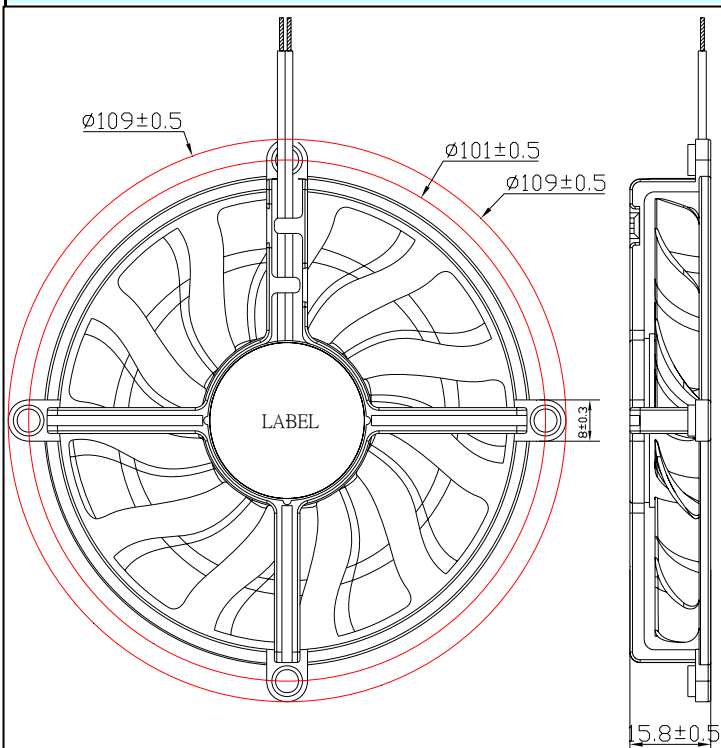

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

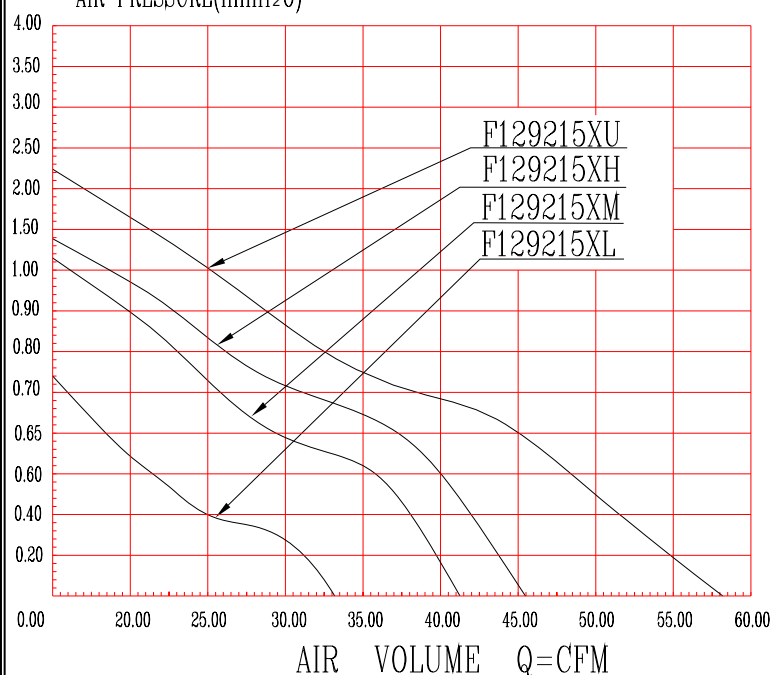

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129215BL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29.5
F129215BM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
F129215BH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	36.2
F129215BU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	40.5
F129215DL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29.5
F129215DM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
F129215DH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	36.2
F129215DU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	40.5
F129215SL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29.5
F129215SM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
F129215SH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	36.2
F129215SU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	40.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

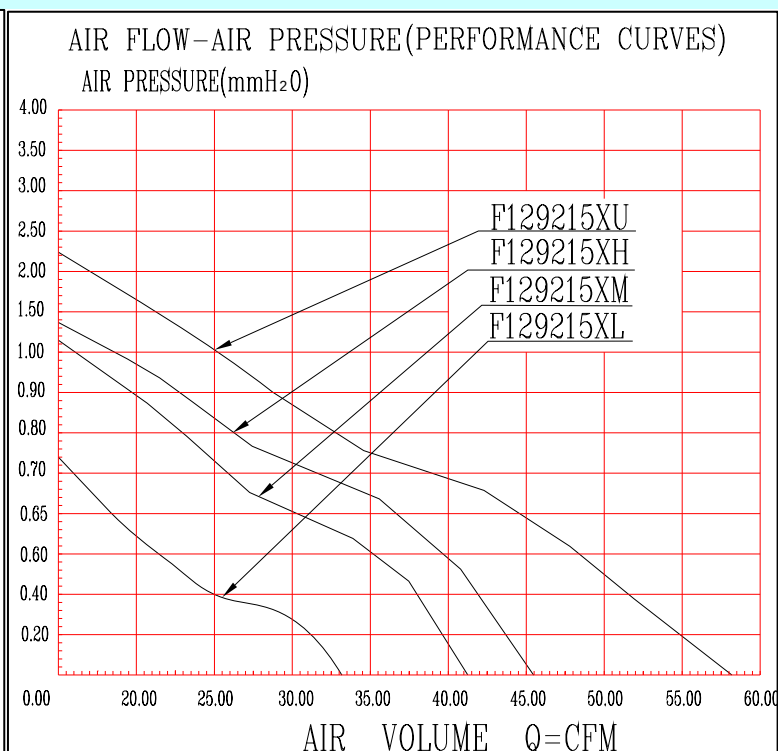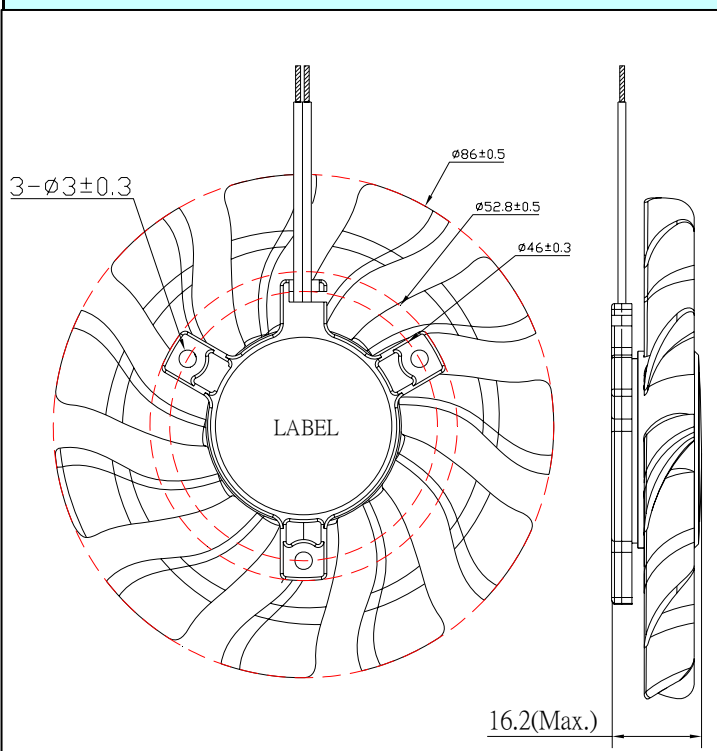

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215BL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29
T129215BM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
T129215BH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	33
T129215BU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	38
T129215DL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29
T129215DM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
T129215DH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	33
T129215DU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	38
T129215SL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29
T129215SM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
T129215SH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	33
T129215SU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	38

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 29g

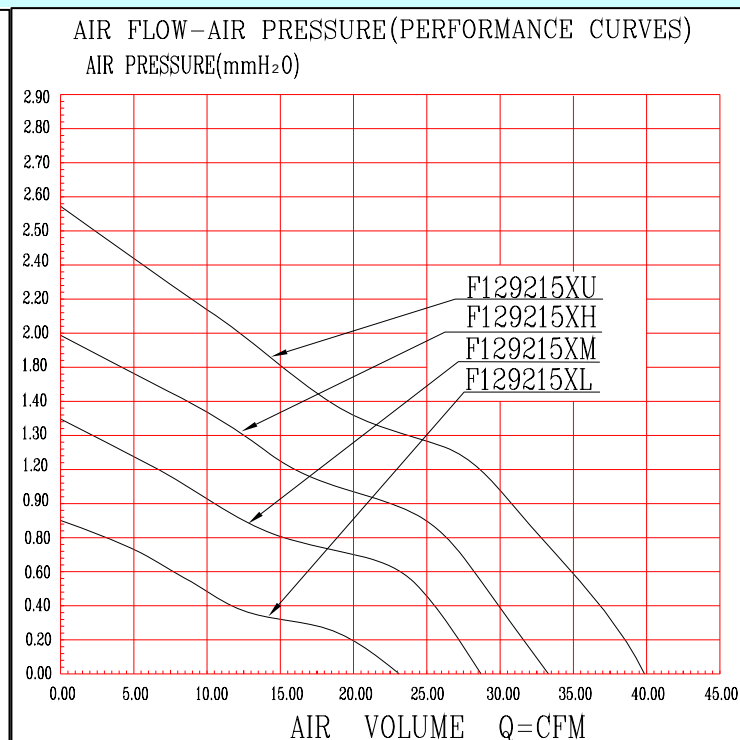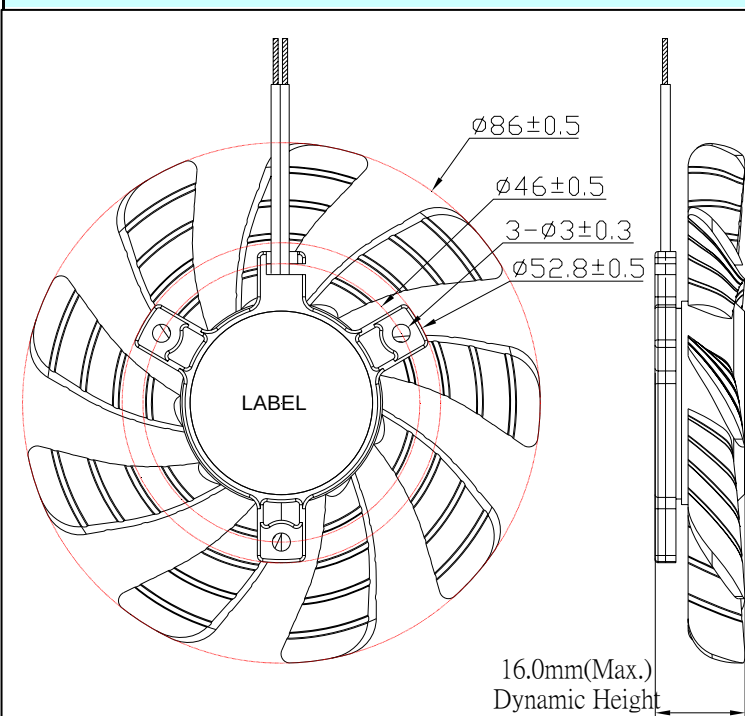

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215BL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
T129215BM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
T129215BH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
T129215BU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35
T129215DL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
T129215DM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
T129215DH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
T129215DU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35
T129215SL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
T129215SM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
T129215SH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
T129215SU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 103g

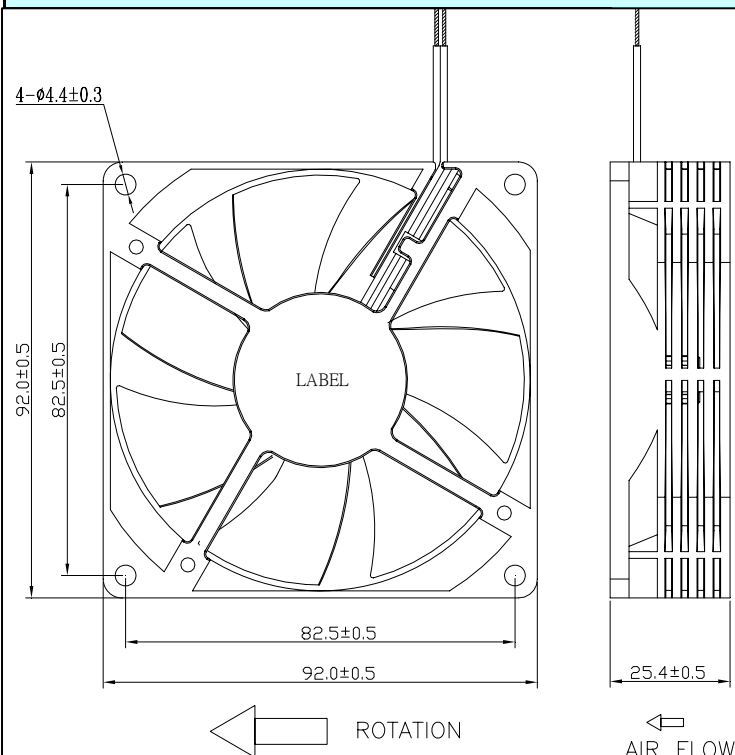

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

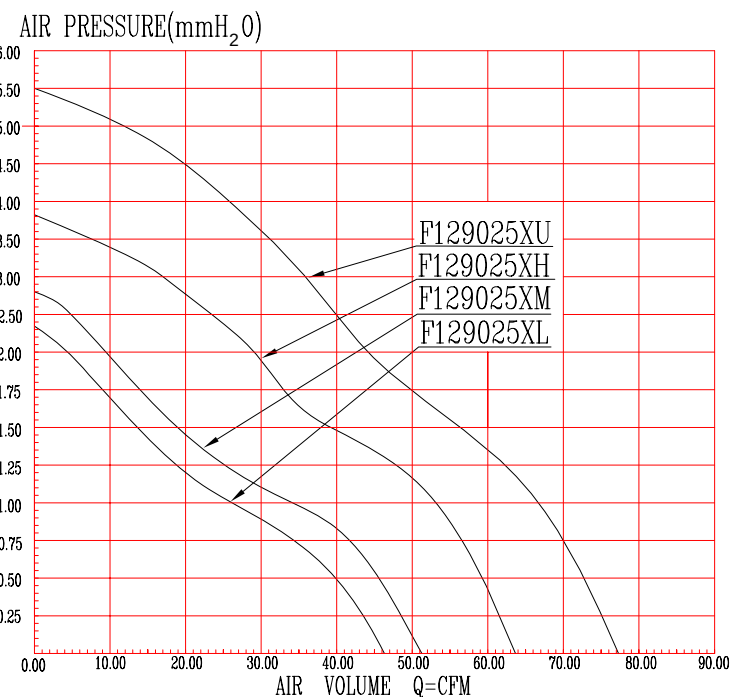

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	46.28	1.31	2.33	27
F129025BM	12	7~13.2	0.18	2.16	2450	51.20	1.45	2.80	30.1
F129025BH	12	7~13.2	0.24	2.88	2850	63.50	1.80	3.82	35
F129025BU	12	7~13.2	0.38	4.56	3450	78.73	2.23	5.50	41.5
F129025DL	12	7~13.2	0.13	1.56	2100	46.28	1.31	2.33	27
F129025DM	12	7~13.2	0.18	2.16	2450	51.20	1.45	2.80	30.1
F129025DH	12	7~13.2	0.24	2.88	2850	63.50	1.80	3.82	35
F129025DU	12	7~13.2	0.38	4.56	3450	78.73	2.23	5.50	41.5
F129025SL	12	7~13.2	0.12	1.44	2100	46.28	1.31	2.33	27
F129025SM	12	7~13.2	0.18	2.16	2450	51.20	1.45	2.80	30.1
F129025SH	12	7~13.2	0.25	3.00	2850	63.50	1.80	3.82	35
F129025SU	12	7~13.2	0.38	4.56	3450	78.73	2.23	5.50	41.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×25MM SERIES

Bearing Type: EBR

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 113g

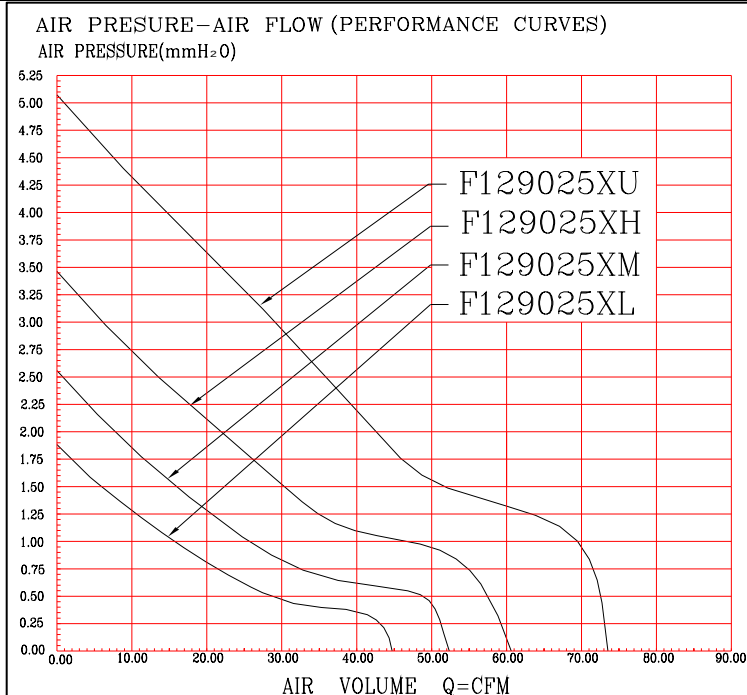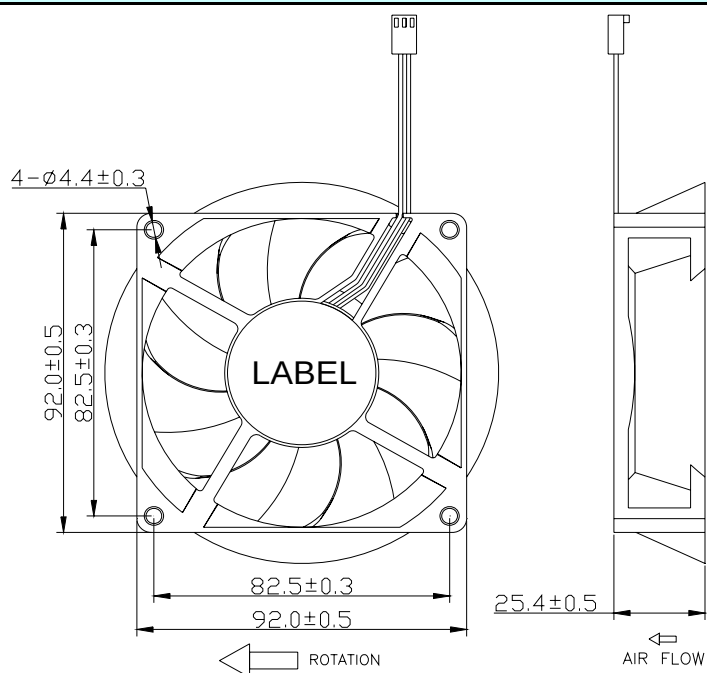

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025DL	12	7~13.2	0.13	1.56	2100	44.72	1.27	1.88	27
F129025DM	12	7~13.2	0.18	2.16	2450	52.17	1.48	2.56	31.1
F129025DH	12	7~13.2	0.24	2.88	2850	60.69	1.72	3.46	37.1
F129025DU	12	7~13.2	0.38	4.56	3450	73.47	2.08	5.07	41.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 103g

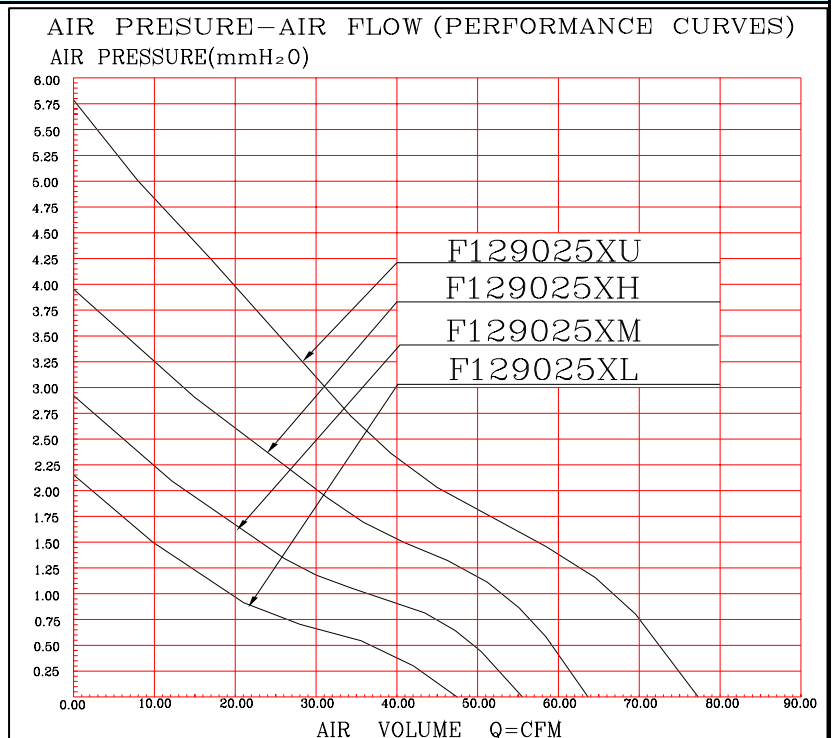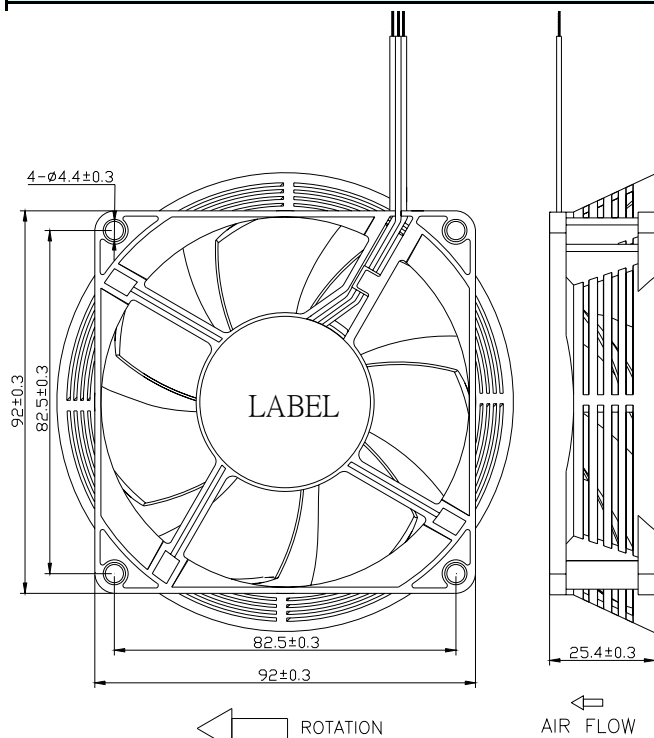

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	47.37	1.34	2.15	28
F129025BM	12	7~13.2	0.18	2.16	2450	55.26	1.57	2.92	30.7
F129025BH	12	7~13.2	0.24	2.88	2850	63.64	1.80	3.95	36.5
F129025BU	12	7~13.2	0.38	4.56	3450	77.04	2.18	5.79	40
F129025DL	12	7~13.2	0.13	1.56	2100	47.37	1.34	2.15	28
F129025DM	12	7~13.2	0.18	2.16	2450	55.26	1.57	2.92	30.7
F129025DH	12	7~13.2	0.24	2.88	2850	63.64	1.80	3.95	36.5
F129025DU	12	7~13.2	0.38	4.56	3450	77.04	2.18	5.79	40
F129025SL	12	7~13.2	0.12	1.44	2100	47.37	1.34	2.15	28
F129025SM	12	7~13.2	0.18	2.16	2450	55.26	1.57	2.92	30.7
F129025SH	12	7~13.2	0.25	3.00	2850	63.64	1.80	3.95	36.5
F129025SU	12	7~13.2	0.38	4.56	3450	77.04	2.18	5.79	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 108g

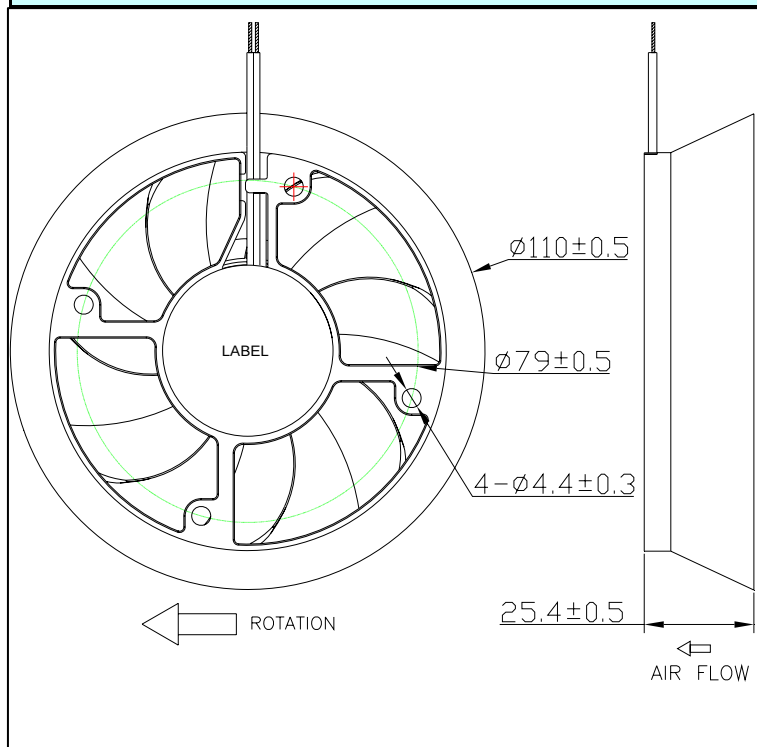

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

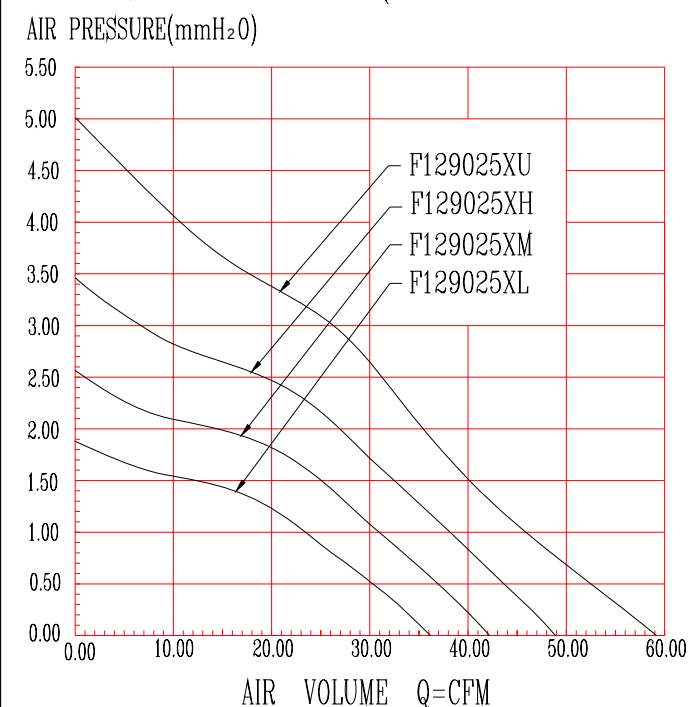

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	36.04	1.02	1.87	34.8
F129025BM	12	7~13.2	0.18	2.16	2450	42.05	1.19	2.55	37.5
F129025BH	12	7~13.2	0.24	2.88	2850	48.92	1.39	3.45	40.1
F129025BU	12	7~13.2	0.38	4.56	3450	59.22	1.68	5.06	43.5
F129025DL	12	7~13.2	0.13	1.56	2100	36.04	1.02	1.87	34.8
F129025DM	12	7~13.2	0.18	2.16	2450	42.05	1.19	2.55	37.5
F129025DH	12	7~13.2	0.24	2.88	2850	48.92	1.39	3.45	40.1
F129025DU	12	7~13.2	0.38	4.56	3450	59.22	1.68	5.06	43.5
F129025SL	12	7~13.2	0.13	1.56	2100	36.04	1.02	1.87	34.8
F129025SM	12	7~13.2	0.18	2.16	2450	42.05	1.19	2.55	37.5
F129025SH	12	7~13.2	0.24	2.88	2850	48.92	1.39	3.45	40.1
F129025SU	12	7~13.2	0.38	4.56	3450	59.22	1.68	5.06	43.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 103g

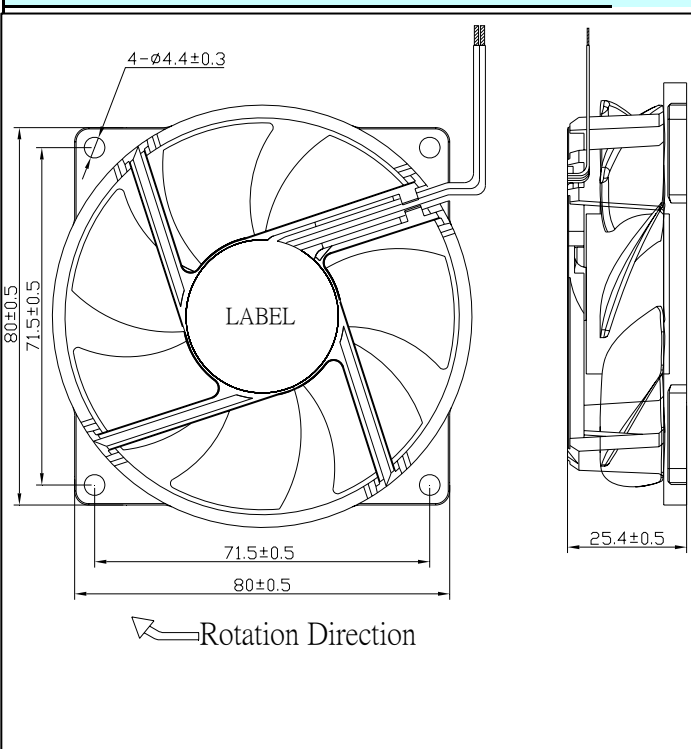

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

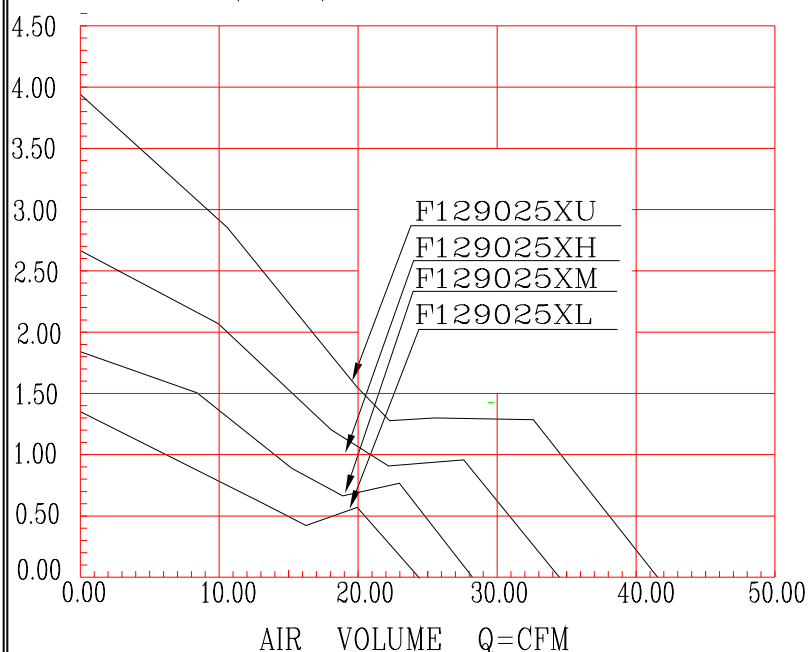

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	24.25	0.69	1.36	23.2
F129025BM	12	7~13.2	0.18	2.16	2450	28.29	0.80	1.85	26.7
F129025BH	12	7~13.2	0.24	2.88	2850	34.28	0.97	2.67	31.6
F129025BU	12	7~13.2	0.38	4.56	3450	41.50	1.18	3.92	36.5
F129025DL	12	7~13.2	0.13	1.56	2100	24.25	0.69	1.36	23.2
F129025DM	12	7~13.2	0.18	2.16	2450	28.29	0.80	1.85	26.7
F129025DH	12	7~13.2	0.24	2.88	2850	34.28	0.97	2.67	31.6
F129025DU	12	7~13.2	0.38	4.56	3450	41.50	1.18	3.92	36.5
F129025SL	12	7~13.2	0.12	1.44	2100	24.25	0.69	1.36	23.2
F129025SM	12	7~13.2	0.18	2.16	2450	28.29	0.80	1.85	26.7

F129025SH	12	7~13.2	0.25	3.00	2850	34.28	0.97	2.67	31.6
F129025SU	12	7~13.2	0.38	4.56	3450	41.50	1.18	3.92	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.

12v L.M.H.U 24v L.M.H.I


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

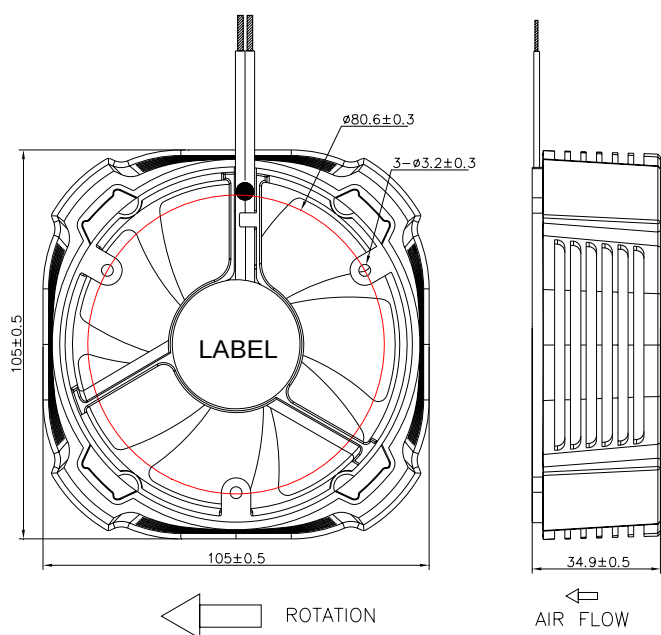

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

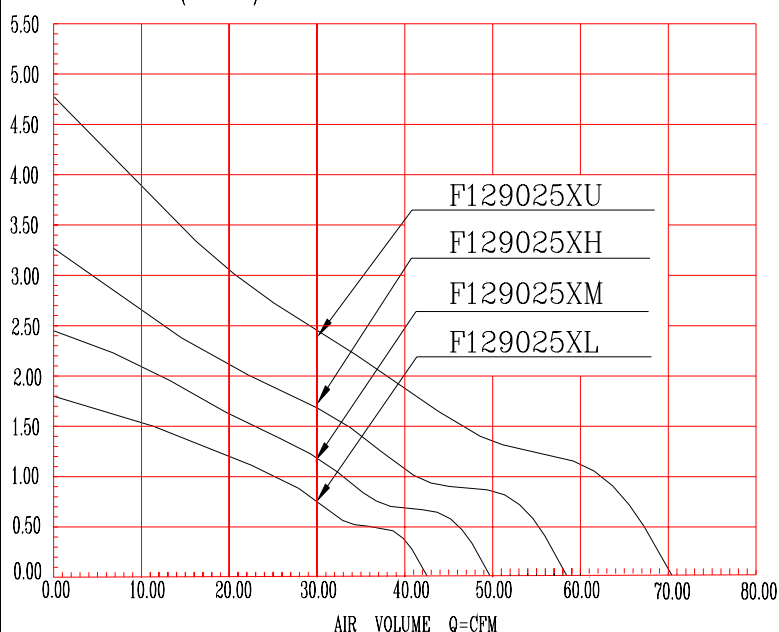

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	42.56	1.21	1.80	35.1
F129025BM	12	7~13.2	0.18	2.16	2450	49.65	1.41	2.45	39.7
F129025BH	12	7~13.2	0.24	2.88	2850	58.21	1.65	3.27	44.8
F129025BU	12	7~13.2	0.38	4.56	3450	70.46	2.00	4.79	49
F129025DL	12	7~13.2	0.13	1.56	2100	42.56	1.21	1.80	35.1
F129025DM	12	7~13.2	0.18	2.16	2450	49.65	1.41	2.45	39.7
F129025DH	12	7~13.2	0.24	2.88	2850	58.21	1.65	3.27	44.8
F129025DU	12	7~13.2	0.38	4.56	3450	70.46	2.00	4.79	49
F129025SL	12	7~13.2	0.12	1.44	2100	42.56	1.21	1.80	35.1
F129025SM	12	7~13.2	0.18	2.16	2450	49.65	1.41	2.45	39.7
F129025SH	12	7~13.2	0.25	3.00	2850	58.21	1.65	3.27	44.8
F129025SU	12	7~13.2	0.38	4.56	3450	70.46	2.00	4.79	49

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

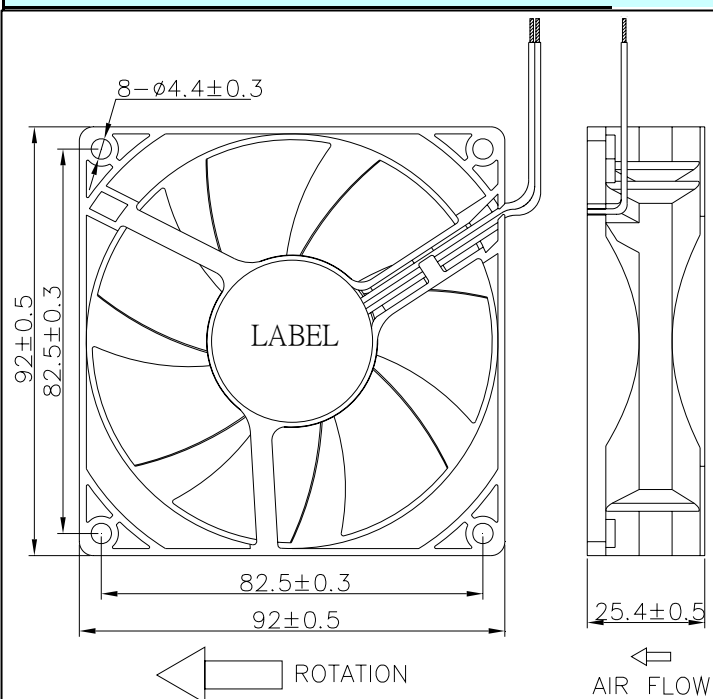

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

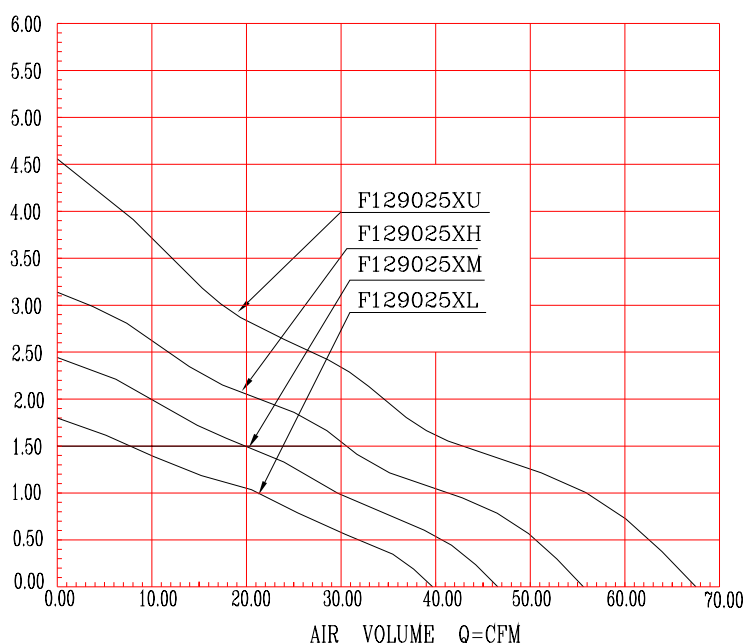

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	39.91	1.13	1.80	24.5
F129025BM	12	7~13.2	0.18	2.16	2450	46.56	1.32	2.45	29.5
F129025BH	12	7~13.2	0.24	2.88	2850	55.83	1.58	3.12	35.4
F129025BU	12	7~13.2	0.38	4.56	3450	67.59	1.91	4.58	38.7
F129025DL	12	7~13.2	0.13	1.56	2100	39.91	1.13	1.80	24.5
F129025DM	12	7~13.2	0.18	2.16	2450	46.56	1.32	2.45	29.5
F129025DH	12	7~13.2	0.24	2.88	2850	55.83	1.58	3.12	35.4
F129025DU	12	7~13.2	0.38	4.56	3450	67.59	1.91	4.58	38.7
F129025SL	12	7~13.2	0.12	1.44	2100	39.91	1.13	1.80	24.5
F129025SM	12	7~13.2	0.18	2.16	2450	46.56	1.32	2.45	29.5
F129025SH	12	7~13.2	0.25	3.00	2850	55.83	1.58	3.12	35.4
F129025SU	12	7~13.2	0.38	4.56	3450	67.59	1.91	4.58	38.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 5v L.M.H.

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

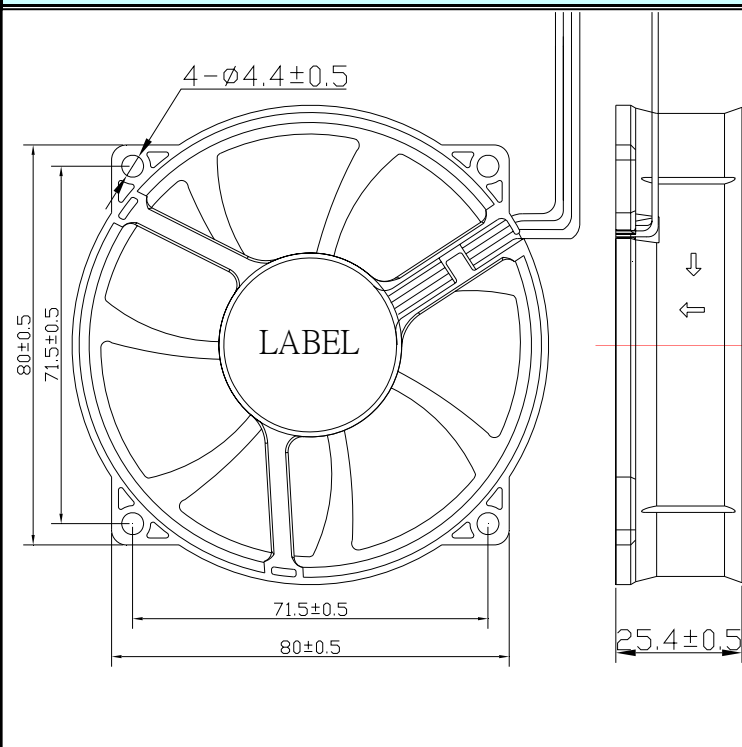

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

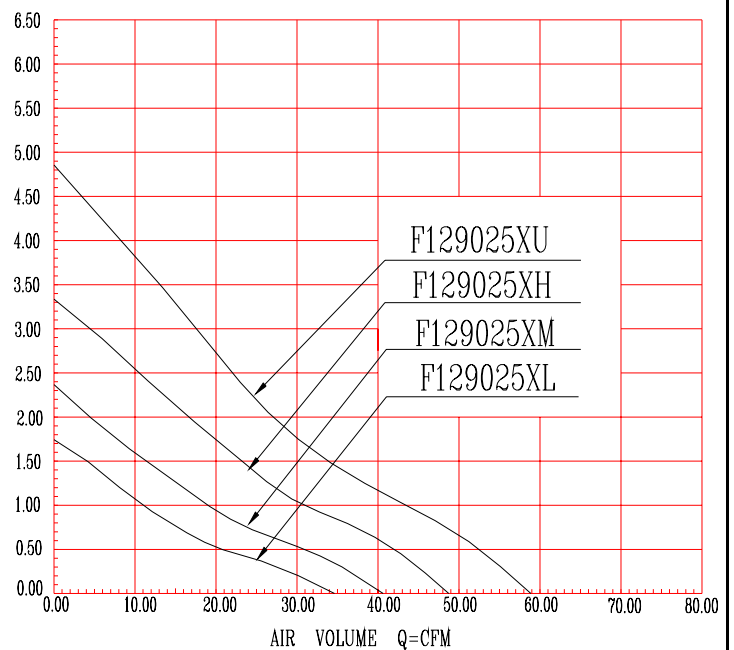

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	34.79	0.99	1.75	26
F129025BM	12	7~13.2	0.18	2.16	2450	40.58	1.15	2.38	30.5
F129025BH	12	7~13.2	0.24	2.88	2850	48.72	1.38	3.33	34.5
F129025BU	12	7~13.2	0.38	4.56	3450	58.97	1.67	4.88	39.9
F129025DL	12	7~13.2	0.13	1.56	2100	34.79	0.99	1.75	26
F129025DM	12	7~13.2	0.18	2.16	2450	40.58	1.15	2.38	30.5
F129025DH	12	7~13.2	0.24	2.88	2850	48.72	1.38	3.33	34.5
F129025DU	12	7~13.2	0.38	4.56	3450	58.97	1.67	4.88	39.9
F129025SL	12	7~13.2	0.12	1.44	2100	34.79	0.99	1.75	26
F129025SM	12	7~13.2	0.18	2.16	2450	40.58	1.15	2.38	30.5
F129025SH	12	7~13.2	0.25	3.00	2850	48.72	1.38	3.33	34.5
F129025SU	12	7~13.2	0.38	4.56	3450	58.97	1.67	4.88	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 103g

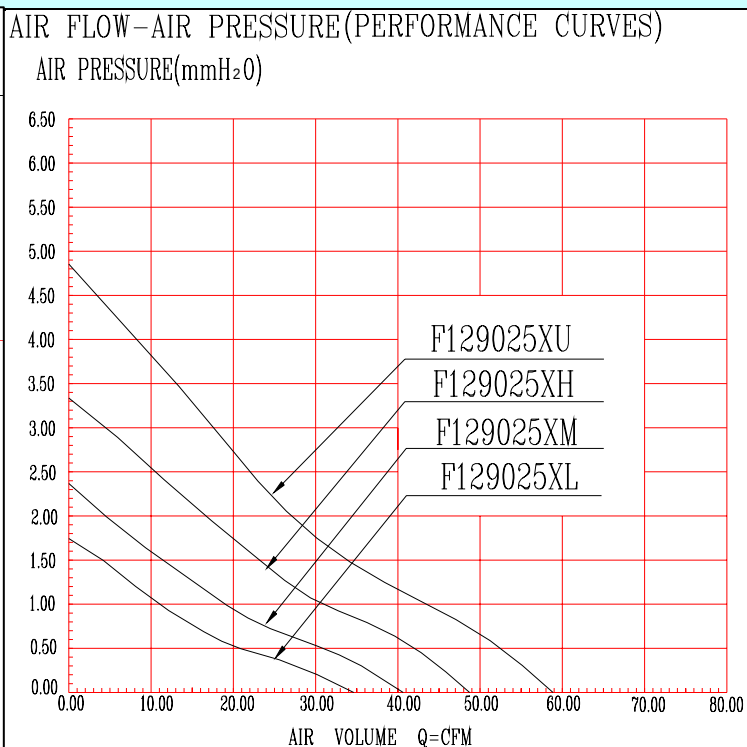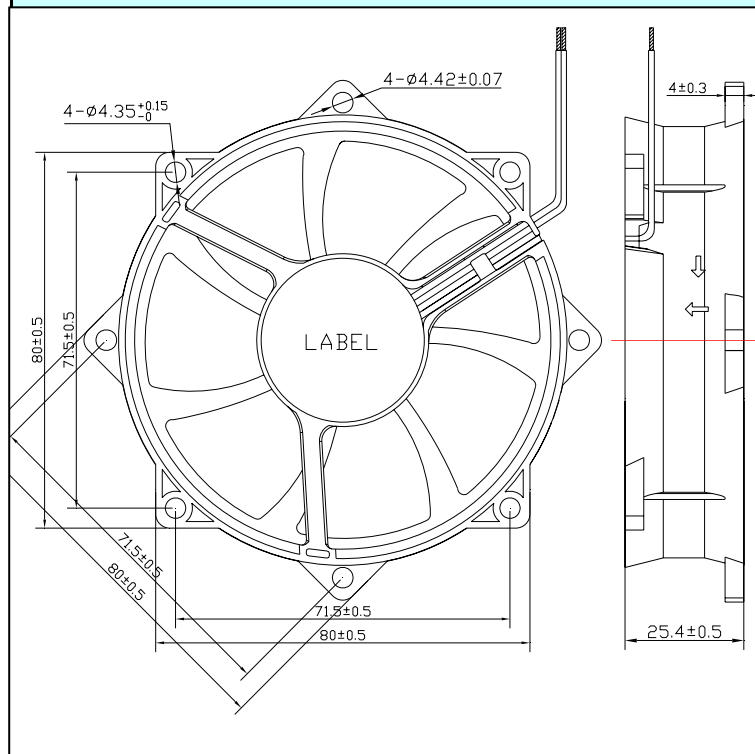

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	34.79	0.99	1.75	26
F129025BM	12	7~13.2	0.18	2.16	2450	40.58	1.15	2.38	30.5
F129025BH	12	7~13.2	0.24	2.88	2850	48.72	1.38	3.33	34.5
F129025BU	12	7~13.2	0.38	4.56	3450	58.97	1.67	4.88	39.9
F129025DL	12	7~13.2	0.13	1.56	2100	34.79	0.99	1.75	26
F129025DM	12	7~13.2	0.18	2.16	2450	40.58	1.15	2.38	30.5
F129025DH	12	7~13.2	0.24	2.88	2850	48.72	1.38	3.33	34.5
F129025DU	12	7~13.2	0.38	4.56	3450	58.97	1.67	4.88	39.9
F129025SL	12	7~13.2	0.12	1.44	2100	34.79	0.99	1.75	26
F129025SM	12	7~13.2	0.18	2.16	2450	40.58	1.15	2.38	30.5
F129025SH	12	7~13.2	0.25	3.00	2850	48.72	1.38	3.33	34.5
F129025SU	12	7~13.2	0.38	4.56	3450	58.97	1.67	4.88	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 103g

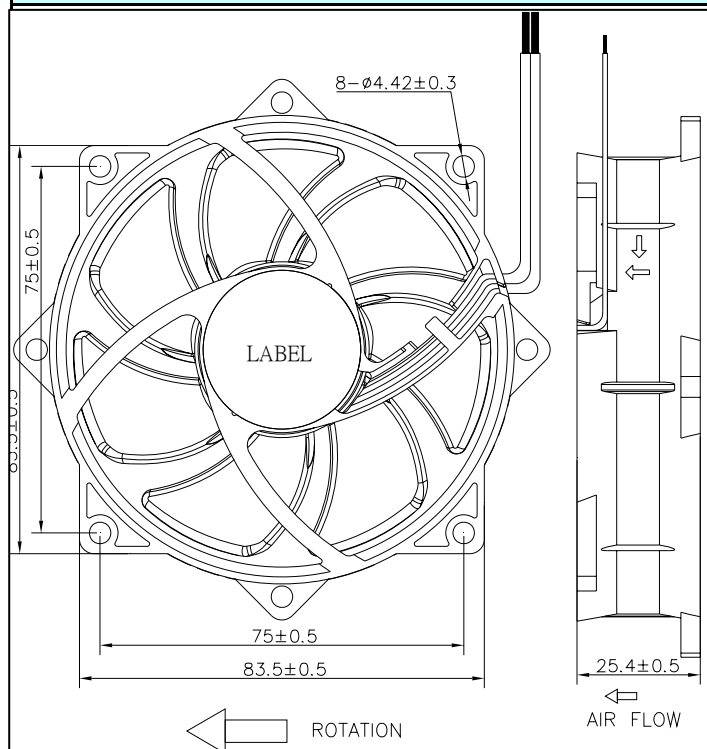

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

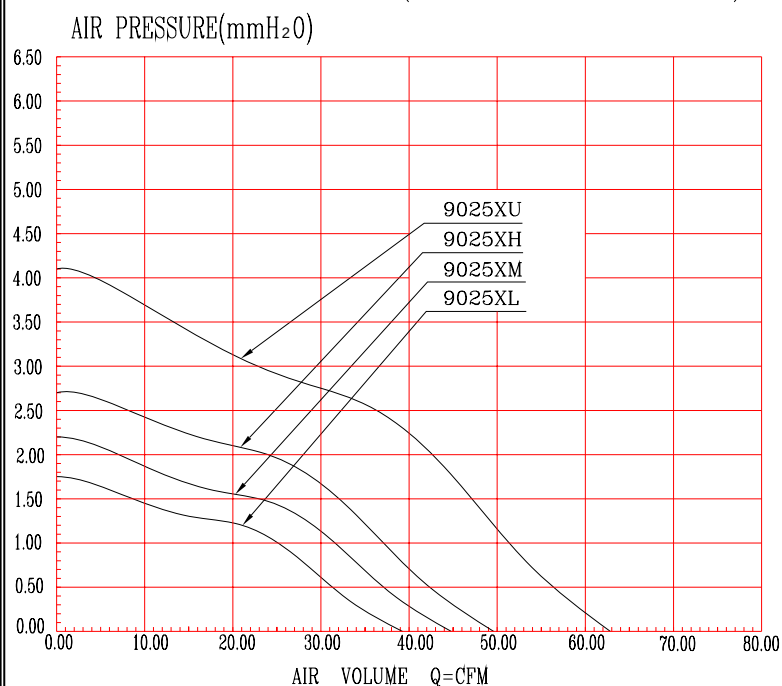

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025*L	12	7~13.2	0.13	1.56	2100	39.13	1.11	1.76	26.5
F129025*M	12	7~13.2	0.18	2.16	2450	44.70	1.27	2.20	29.2
F129025*H	12	7~13.2	0.24	2.88	2850	49.60	1.41	2.70	31.5
F129025*U	12	7~13.2	0.38	4.56	3450	62.80	1.78	4.10	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

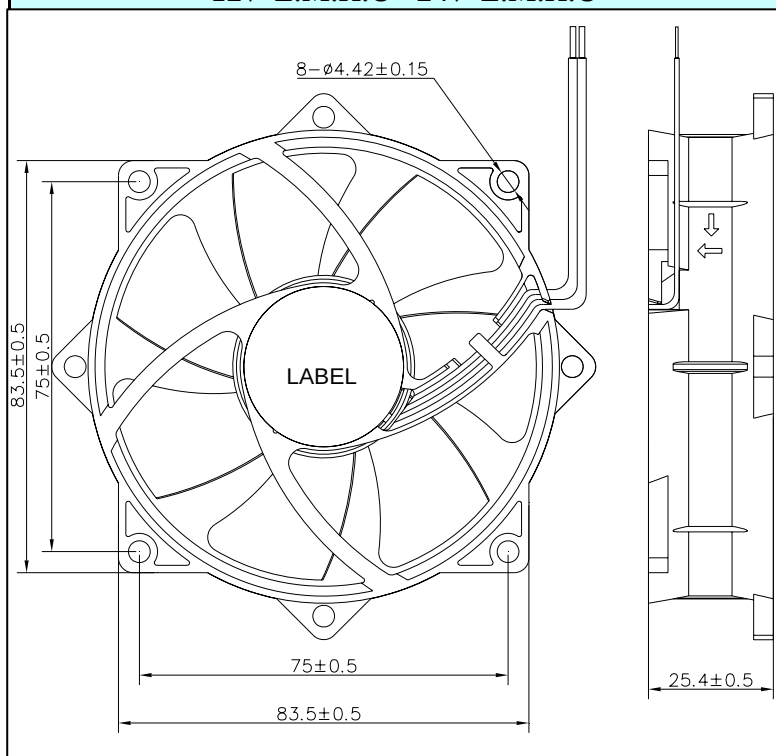

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

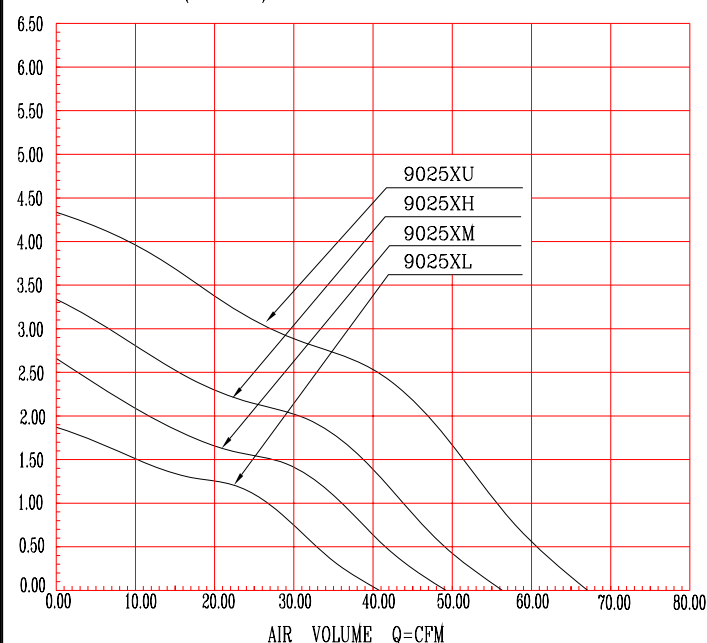

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	40.70	1.15	1.88	25.2
F129025BM	12	7~13.2	0.18	2.16	2450	49.25	1.40	2.65	30
F129025BH	12	7~13.2	0.24	2.88	2850	56.37	1.60	3.33	33.2
F129025BU	12	7~13.2	0.38	4.56	3450	67.09	1.90	4.32	38
F129025DL	12	7~13.2	0.13	1.56	2100	40.70	1.15	1.88	25.2
F129025DM	12	7~13.2	0.18	2.16	2450	49.25	1.40	2.65	30
F129025DH	12	7~13.2	0.24	2.88	2850	56.37	1.60	3.33	33.2
F129025DU	12	7~13.2	0.38	4.56	3450	67.09	1.90	4.32	38
F129025SL	12	7~13.2	0.12	1.44	2100	40.70	1.15	1.88	25.2
F129025SM	12	7~13.2	0.18	2.16	2450	49.25	1.40	2.65	30
F129025SH	12	7~13.2	0.25	3.00	2850	56.37	1.60	3.33	33.2
F129025SU	12	7~13.2	0.38	4.56	3450	67.09	1.90	4.32	38

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

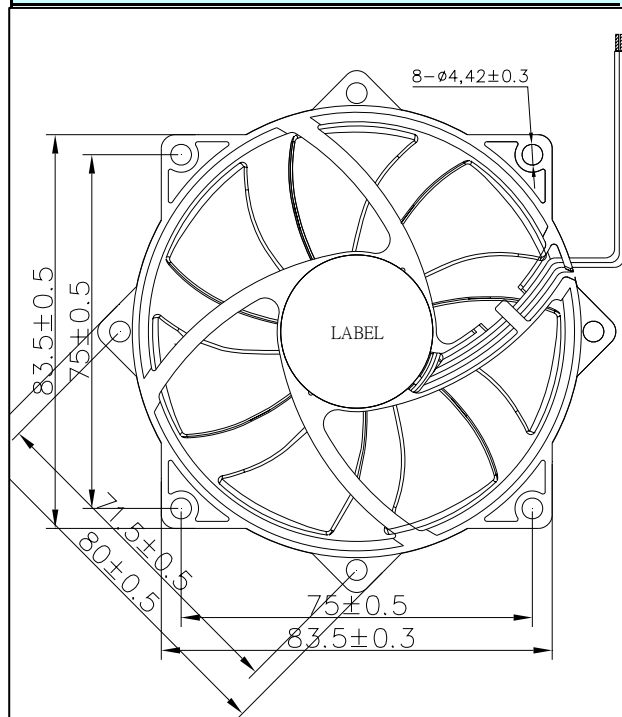

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

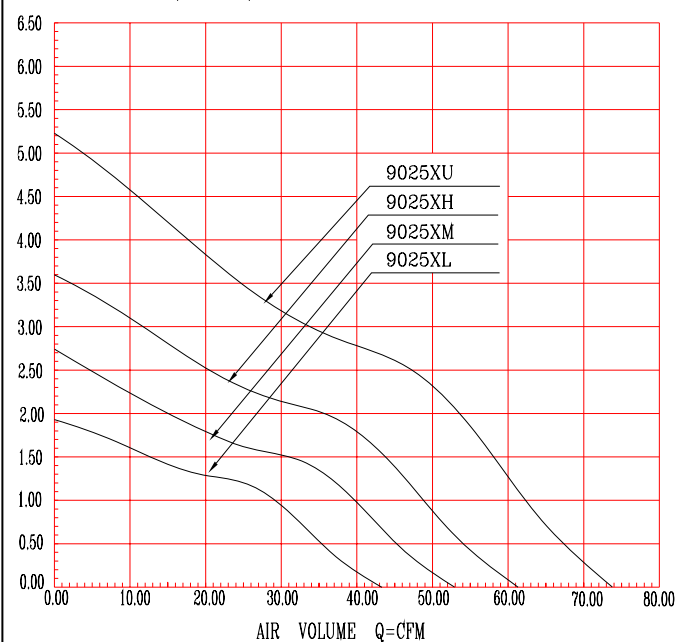

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	43.11	1.22	1.93	26.8
F129025BM	12	7~13.2	0.18	2.16	2450	52.99	1.50	2.73	31.1
F129025BH	12	7~13.2	0.24	2.88	2850	61.18	1.73	3.6	36.5
F129025BU	12	7~13.2	0.38	4.56	3450	73.77	2.09	5.21	42.2
F129025DL	12	7~13.2	0.13	1.56	2100	43.11	1.22	1.93	26.8
F129025DM	12	7~13.2	0.18	2.16	2450	52.99	1.50	2.73	31.1
F129025DH	12	7~13.2	0.24	2.88	2850	61.18	1.73	3.6	36.5
F129025DU	12	7~13.2	0.38	4.56	3450	73.77	2.09	5.21	42.2
F129025SL	12	7~13.2	0.12	1.44	2100	43.11	1.22	1.93	26.8
F129025SM	12	7~13.2	0.18	2.16	2450	52.99	1.50	2.73	31.1
F129025SH	12	7~13.2	0.25	3.00	2850	61.18	1.73	3.6	36.5
F129025SU	12	7~13.2	0.38	4.56	3450	73.77	2.09	5.21	42.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

Impeller Plastic (UL : 94V-0)

EBR

Protection : Auto-Restart /Impedance


One Ball One Sleeve Bearing

Operating Temp : ~10~70°C


Rated Voltage: 5v L.M.H.

Weight : 89g

12v L.M.H.U 24v L.M.H.U

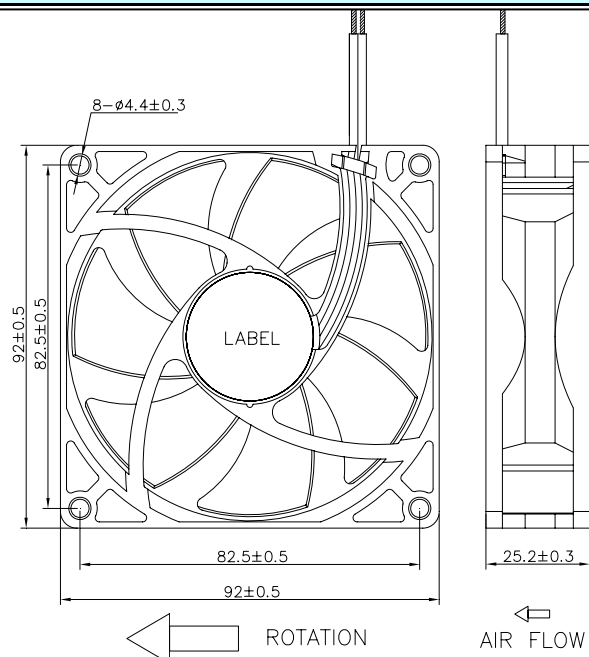

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

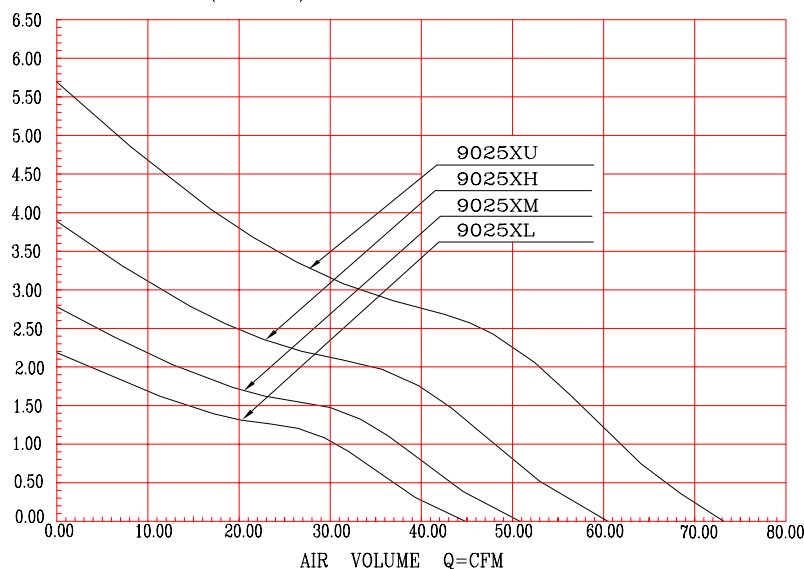

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	44.81	1.27	2.18	26.3
F129025BM	12	7~13.2	0.18	2.16	2450	50.79	1.44	2.77	31.5
F129025BH	12	7~13.2	0.24	2.88	2850	60.49	1.71	3.89	36.0
F129025BU	12	7~13.2	0.38	4.56	3450	73.22	2.07	5.70	40.3
F129025DL	12	7~13.2	0.13	1.56	2100	44.81	1.27	2.18	26.3
F129025DM	12	7~13.2	0.18	2.16	2450	50.79	1.44	2.77	31.5
F129025DH	12	7~13.2	0.24	2.88	2850	60.49	1.71	3.89	36.0
F129025DU	12	7~13.2	0.38	4.56	3450	73.22	2.07	5.70	40.3
F129025SL	12	7~13.2	0.12	1.44	2100	44.81	1.27	2.18	26.3
F129025SM	12	7~13.2	0.18	2.16	2450	50.79	1.44	2.77	31.5
F129025SH	12	7~13.2	0.25	3.00	2850	60.49	1.71	3.89	36.0
F129025SU	12	7~13.2	0.38	4.56	3450	73.22	2.07	5.70	40.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

Impeller Plastic (UL : 94V-0)

EBR

Protection : Auto-Restart /Impedance


One Ball One Sleeve Bearing

Operating Temp : ~10~70°C


Rated Voltage 5v L.M.H.

Weight : 88g

12v L.M.H.U 24v L.M.H.U

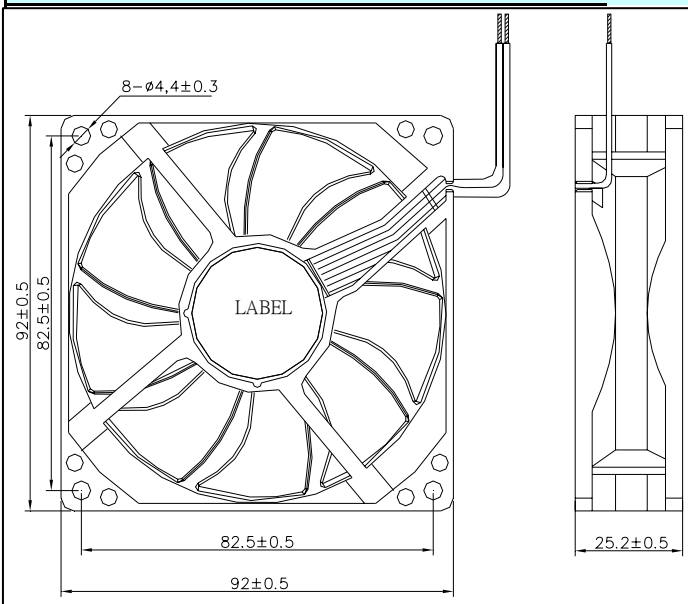

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

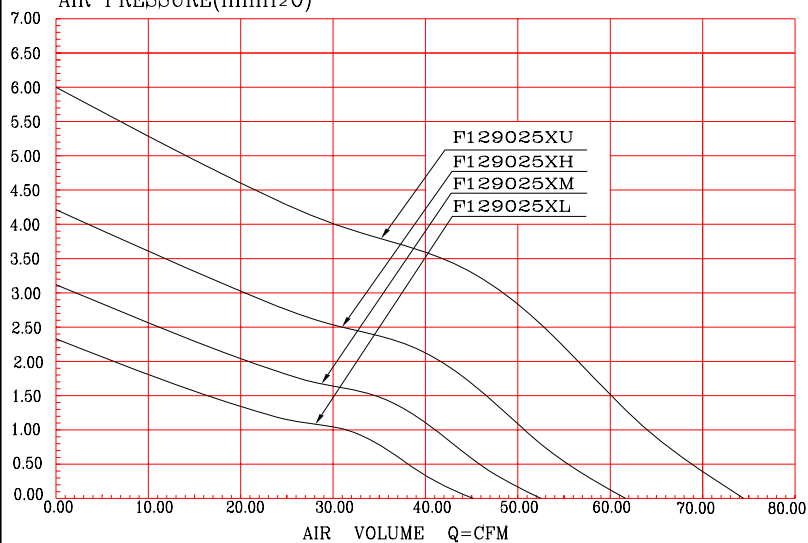

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	45.04	1.28	2.33	28
F129025BM	12	7~13.2	0.18	2.16	2450	52.54	1.49	3.12	33.5
F129025BH	12	7~13.2	0.24	2.88	2850	61.83	1.75	4.21	36.5
F129025BU	12	7~13.2	0.38	4.56	3450	74.55	2.11	6.00	41.5
F129025DL	12	7~13.2	0.13	1.56	2100	45.04	1.28	2.33	28
F129025DM	12	7~13.2	0.18	2.16	2450	52.54	1.49	3.12	33.5
F129025DH	12	7~13.2	0.24	2.88	2850	61.83	1.75	4.21	36.5
F129025DU	12	7~13.2	0.38	4.56	3450	74.55	2.11	6.00	41.5
F129025SL	12	7~13.2	0.12	1.44	2100	45.04	1.28	2.33	28
F129025SM	12	7~13.2	0.18	2.16	2450	52.54	1.49	3.12	33.5
F129025SH	12	7~13.2	0.25	3.00	2850	61.83	1.75	4.21	36.5
F129025SU	12	7~13.2	0.38	4.56	3450	74.55	2.11	6.00	41.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U

Material : Housing Plastic (UL : 94V-0)


Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C


Weight : 103g

Weight : 103g

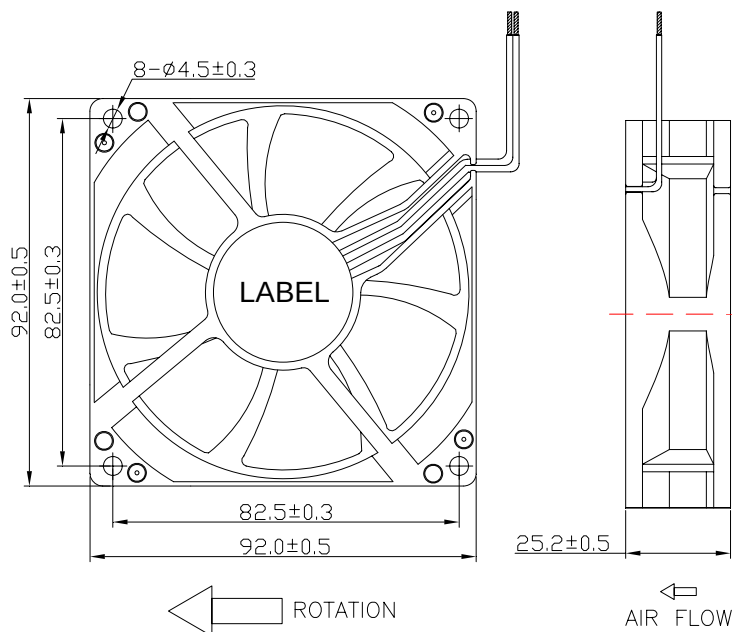

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

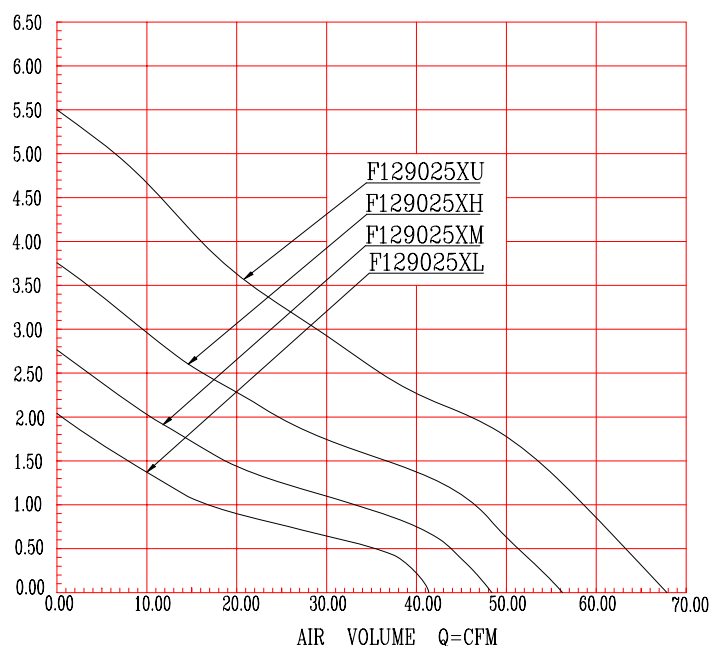

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	41.33	1.17	2.04	25.9
F129025BM	12	7~13.2	0.18	2.16	2450	48.22	1.37	2.77	30.2
F129025BH	12	7~13.2	0.24	2.88	2850	56.09	1.59	3.75	34.6
F129025BU	12	7~13.2	0.38	4.56	3450	67.90	1.92	5.50	40.7
F129025DL	12	7~13.2	0.13	1.56	2100	41.33	1.17	2.04	25.9
F129025DM	12	7~13.2	0.18	2.16	2450	48.22	1.37	2.77	30.2
F129025DH	12	7~13.2	0.24	2.88	2850	56.09	1.59	3.75	34.6
F129025DU	12	7~13.2	0.38	4.56	3450	67.90	1.92	5.50	40.7
F129025SL	12	7~13.2	0.12	1.44	2100	41.33	1.17	2.04	25.9
F129025SM	12	7~13.2	0.18	2.16	2450	48.22	1.37	2.77	30.2
F129025SH	12	7~13.2	0.25	3.00	2850	56.09	1.59	3.75	34.6
F129025SU	12	7~13.2	0.38	4.56	3450	67.90	1.92	5.50	40.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×30MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 71g

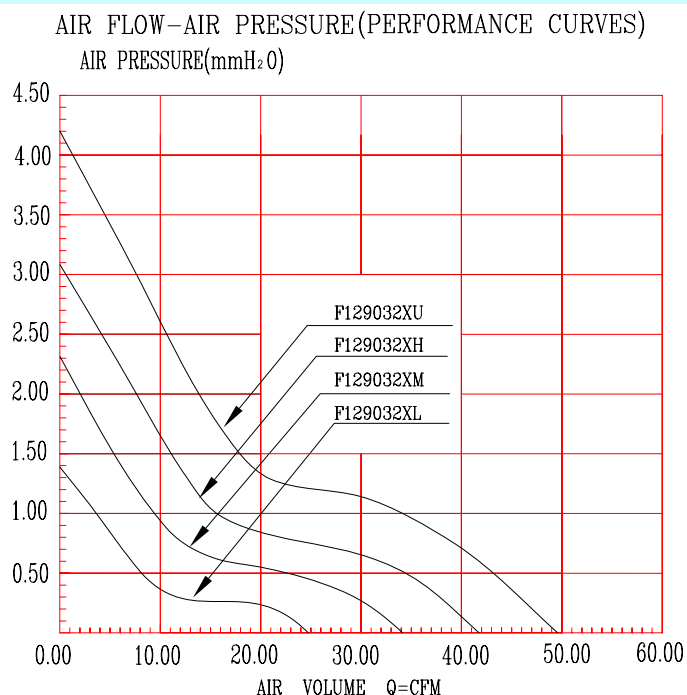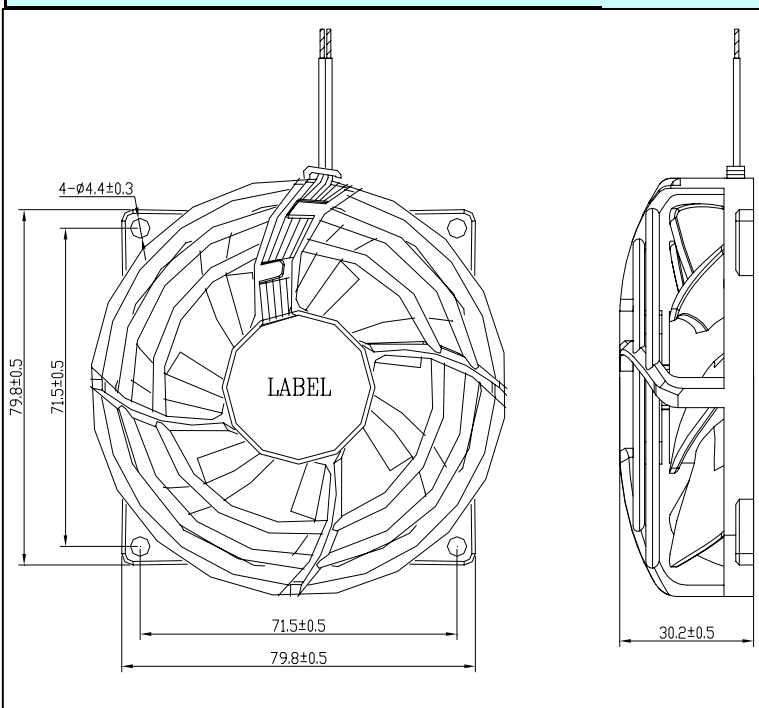

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129032BL	12	7~13.2	0.14	1.68	1800	24.88	0.70	1.38	25.0
F129032BM	12	7~13.2	0.20	2.40	2400	34.19	0.97	2.31	28.5
F129032BH	12	7~13.2	0.48	5.76	3000	41.72	1.18	3.09	34.0
F129032BU	12	7~13.2	1.00	12.0	3600	49.59	1.40	4.20	38.0
F129032DL	12	7~13.2	0.14	1.68	1800	24.88	0.70	1.38	25.0
F129032DM	12	7~13.2	0.20	2.40	2400	34.19	0.97	2.31	28.5
F129032DH	12	7~13.2	0.48	5.76	3000	41.72	1.18	3.09	34.0
F129032DU	12	7~13.2	1.00	12.0	3600	49.59	1.40	4.20	38.0
F129032SL	12	7~13.2	0.14	1.68	1800	24.88	0.70	1.38	25.0
F129032SM	12	7~13.2	0.20	2.40	2400	34.19	0.97	2.31	28.5
F129032SH	12	7~13.2	0.48	5.76	3000	41.72	1.18	3.09	34.0
F129032SU	12	7~13.2	1.00	12.0	3600	49.59	1.40	4.20	38.0

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×32MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 115g

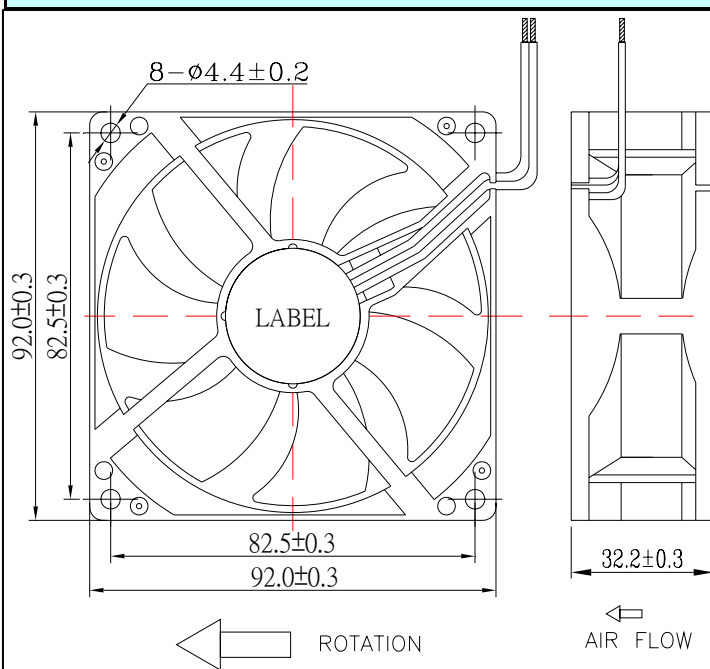

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

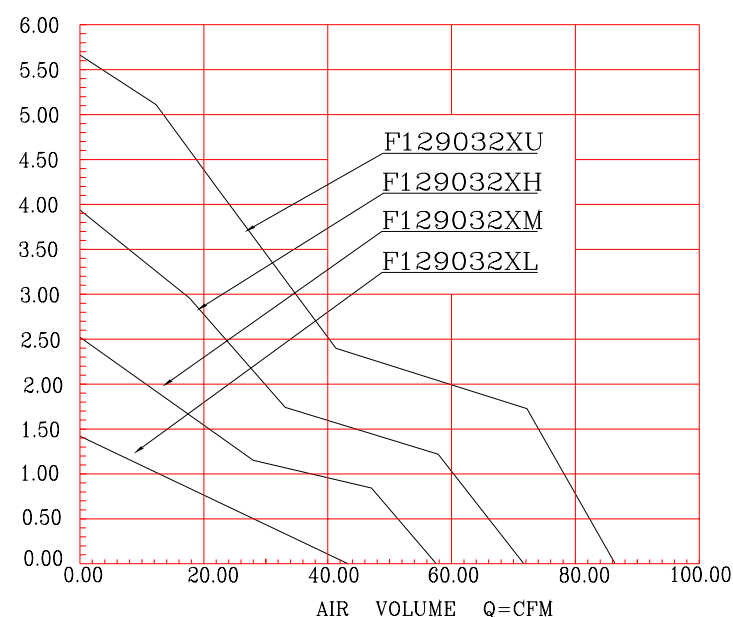

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129032BL	12	7~13.2	0.14	1.68	1800	43.13	1.22	1.42	26.6
F129032BM	12	7~13.2	0.20	2.40	2400	57.50	1.63	2.52	31.2
F129032BH	12	7~13.2	0.48	5.76	3000	71.88	2.04	3.94	37
F129032BU	12	7~13.2	1.00	12.00	3600	86.26	2.44	5.67	41.5
F129032DL	12	7~13.2	0.14	1.68	1800	43.13	1.22	1.42	26.6
F129032DM	12	7~13.2	0.20	2.40	2400	57.50	1.63	2.52	31.2
F129032DH	12	7~13.2	0.48	5.76	3000	71.88	2.04	3.94	37
F129032DU	12	7~13.2	1.00	12.00	3600	86.26	2.44	5.67	41.5
F129032SL	12	7~13.2	0.14	1.68	1800	43.13	1.22	1.42	26.6
F129032SM	12	7~13.2	0.20	2.40	2400	57.50	1.63	2.52	31.2
F129032SH	12	7~13.2	0.48	5.76	3000	71.88	2.04	3.94	37
F129032SU	12	7~13.2	1.00	12.00	3600	86.26	2.44	5.67	41.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

92×92×37MM SERIES

Bearing Type: Two ball bearing

EBR(无安规)

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 83g

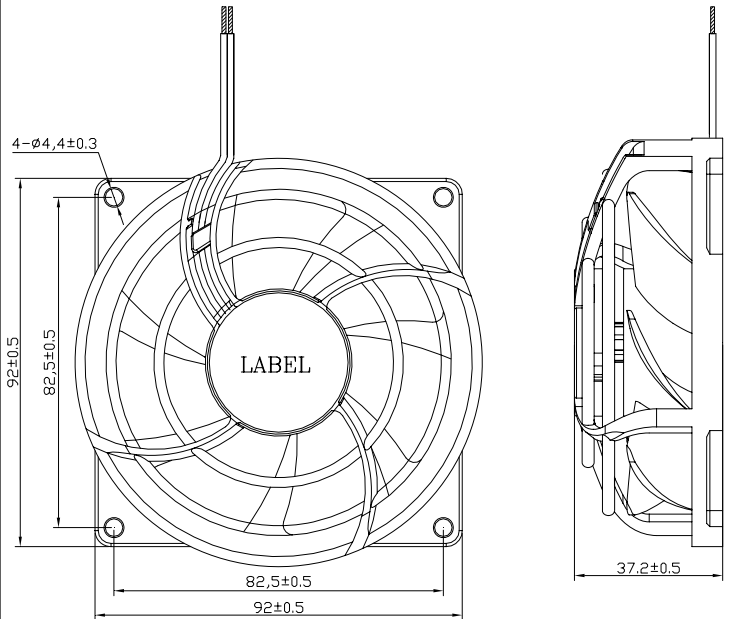

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

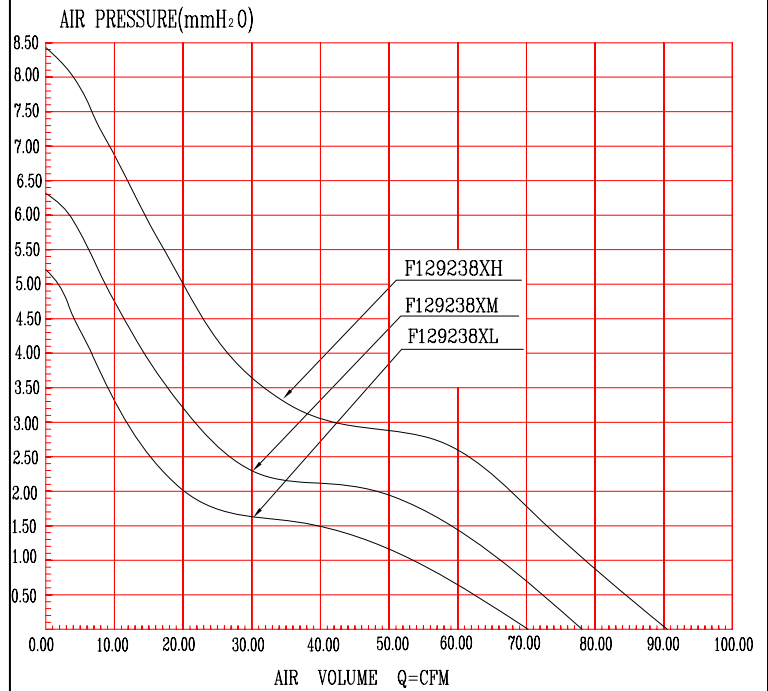

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129238BL	12	7~13.2	0.50	6.0	3200	70.10	1.99	5.22	40.0
F129238BM	12	7~13.2	0.70	8.4	3600	78.15	2.21	6.34	43.5
F129238BH	12	7~13.2	0.80	9.6	4200	90.45	2.57	8.42	47.0
F129238SL	12	7~13.2	0.50	6.0	3200	70.10	1.99	5.22	40.0
F129238SM	12	7~13.2	0.70	8.4	3600	78.15	2.21	6.34	43.5
F129238SH	12	7~13.2	0.80	9.6	4200	90.45	2.57	8.42	47.0

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

92×92×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 115g

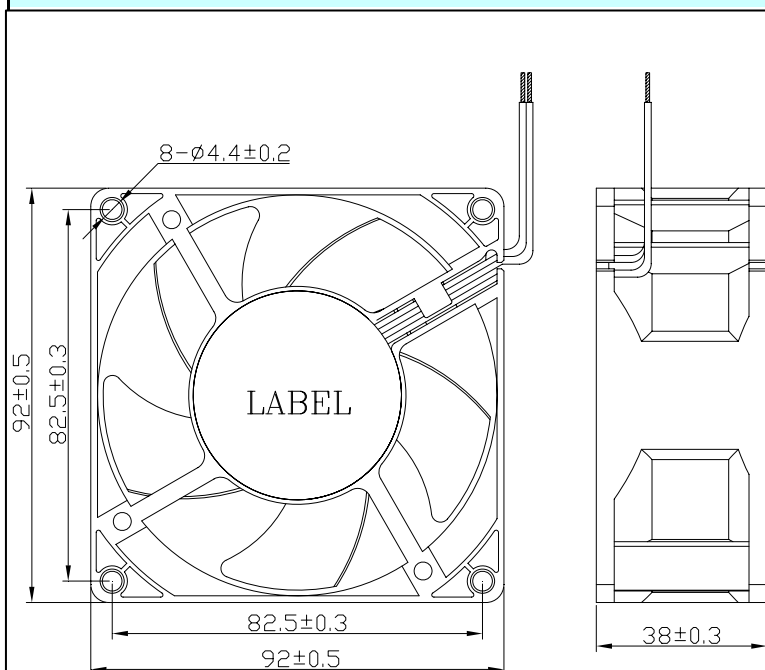

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

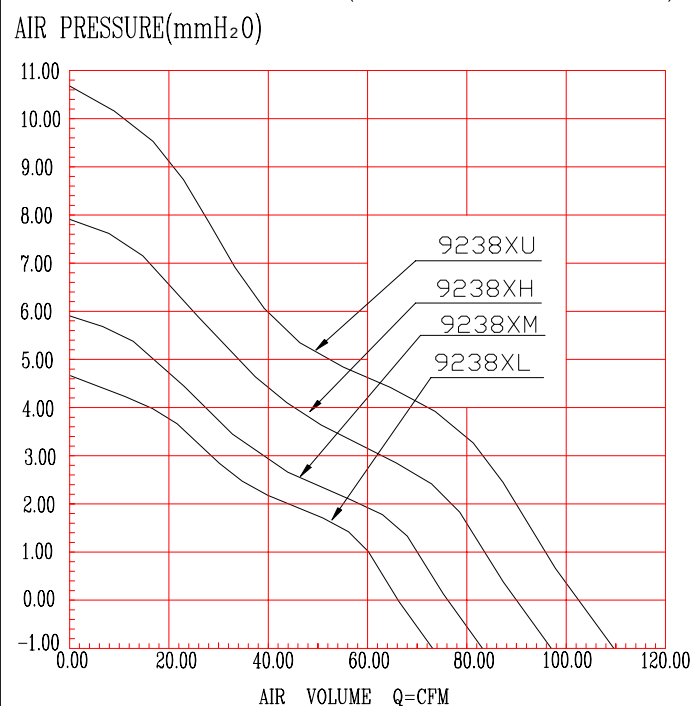

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129238BL	12	7~13.2	0.50	6.00	3200	73.43	2.08	4.63	45.9
F129238BM	12	7~13.2	0.70	8.40	3600	82.61	2.34	5.86	48
F129238BH	12	7~13.2	0.80	9.60	4200	96.38	2.73	7.98	51.2
F129238BU	12	7~13.2	1.20	14.40	4800	109.91	3.11	10.62	54

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

92×92×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 115g

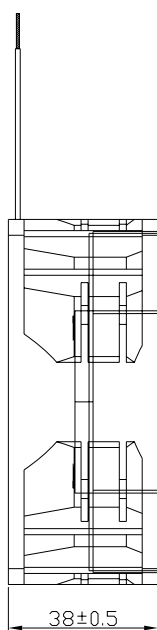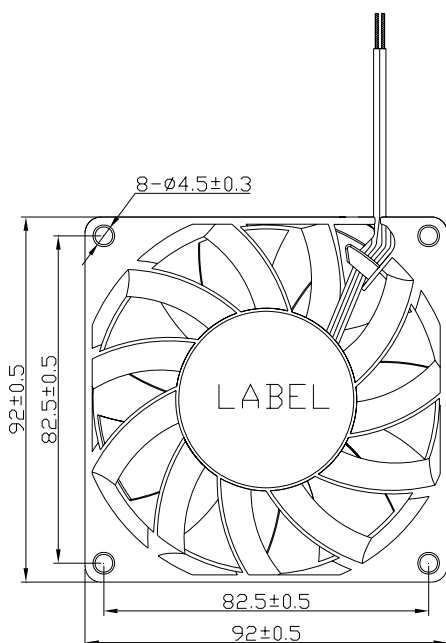

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

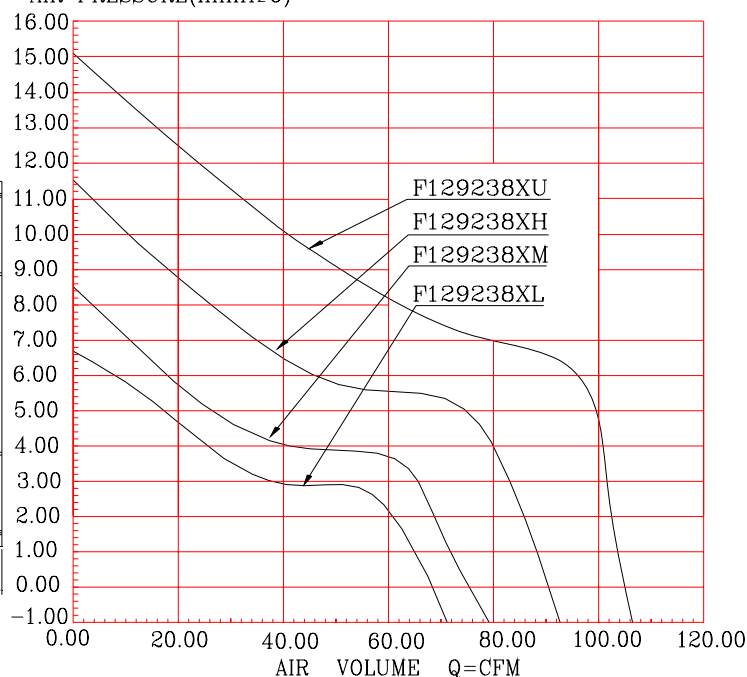

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129238BL	12	7~13.2	0.50	6.00	3200	70.98	2..01	6.73	42.5
F129238BM	12	7~13.2	0.70	8.40	3600	79.85	2.26	8.52	45.5
F129238BH	12	7~13.2	0.80	9.60	4200	93.16	2..64	11.59	50.5
F129238BU	12	7~13.2	1.20	14.40	4800	106.46	3.02	15.14	53.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

92×92×38MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 115g

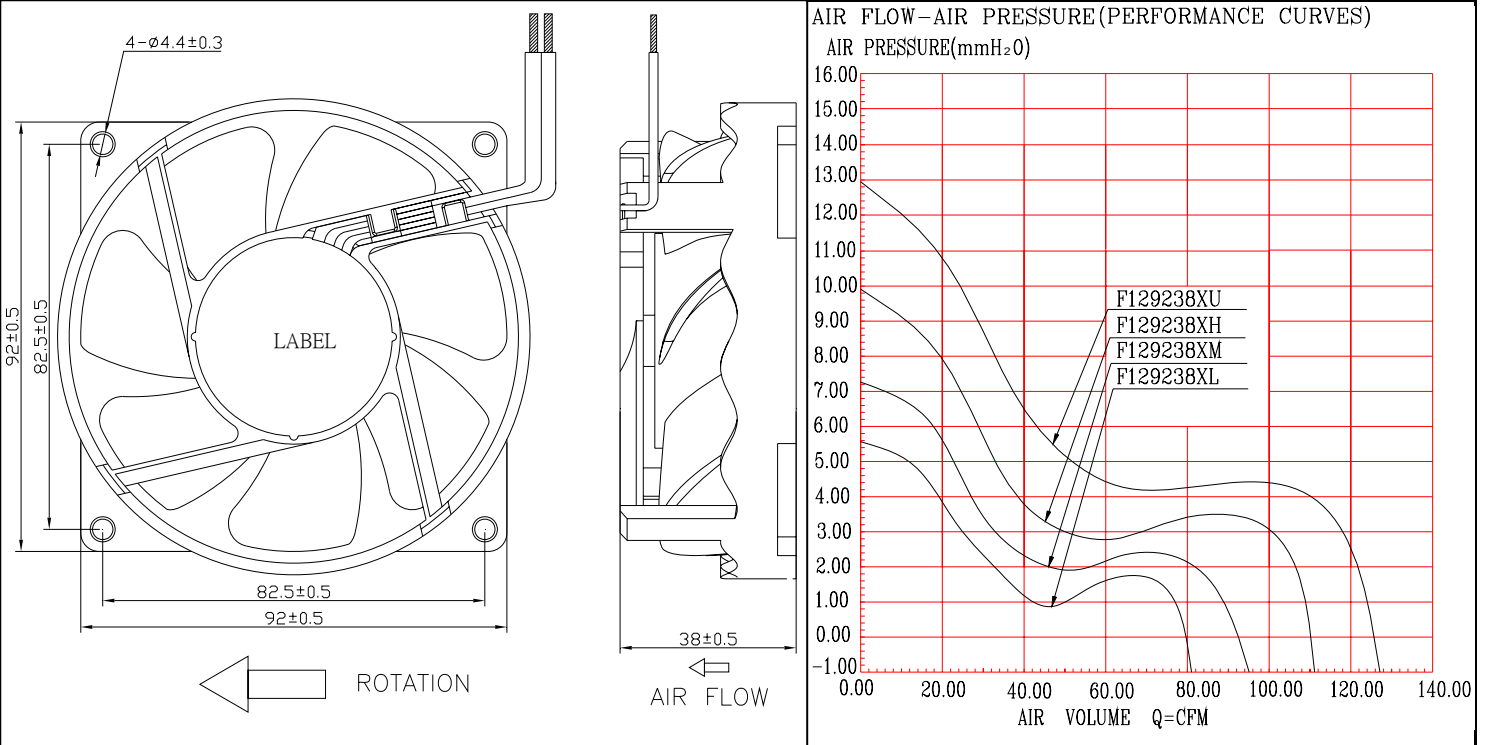

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
F129238BL	12	7~13.2	0.50	6.00	3200	80.45	2.28	5.50	43
F129238BM	12	7~13.2	0.70	8.40	3600	95.05	2.69	7.28	47.1
F129238BH	12	7~13.2	0.80	9.60	4200	110.90	3.14	9.91	52.5
F129238BU	12	7~13.2	1.20	14.40	4800	126.74	3.59	12.94	55
F129238DL	12	7~13.2	0.50	6.00	3200	80.45	2.28	5.50	43
F129238DM	12	7~13.2	0.70	8.40	3600	95.05	2.69	7.28	47.1
F129238DH	12	7~13.2	0.80	9.60	4200	110.90	3.14	9.91	52.5
F129238DU	12	7~13.2	1.20	14.40	4800	126.74	3.59	12.94	55
F129238SL	12	7~13.2	0.50	6.00	3200	80.45	2.28	5.50	43
F129238SM	12	7~13.2	0.70	8.40	3600	95.05	2.69	7.28	47.1
F129238SH	12	7~13.2	0.80	9.60	4200	110.90	3.14	9.91	52.5
F129238SU	12	7~13.2	1.20	14.40	4800	126.74	3.59	12.94	55

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

97×97×33MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 165g

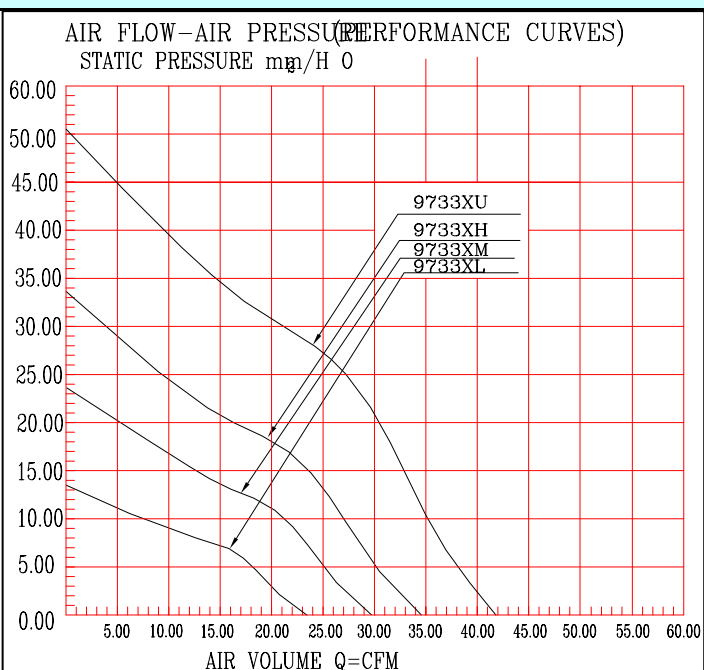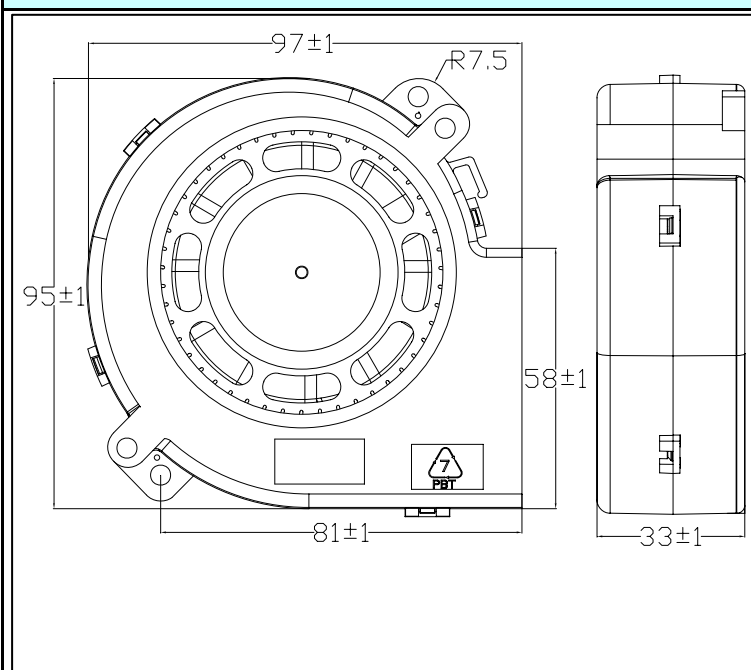

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B129733BL	12	7~13.2	0.40	4.80	2600	23.53	0.67	13.57	46.4
B129733BM	12	7~13.2	0.45	5.40	3200	29.28	0.83	23.46	50.5
B129733BH	12	7~13.2	0.80	9.60	3800	34.58	1.01	33.67	55.3
B129733BU	12	7~13.2	1.20	14.40	4600	41.65	1.18	50.47	59.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

100×100×20MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 5v L.M.H.

12v L.M.H.U 24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 66g

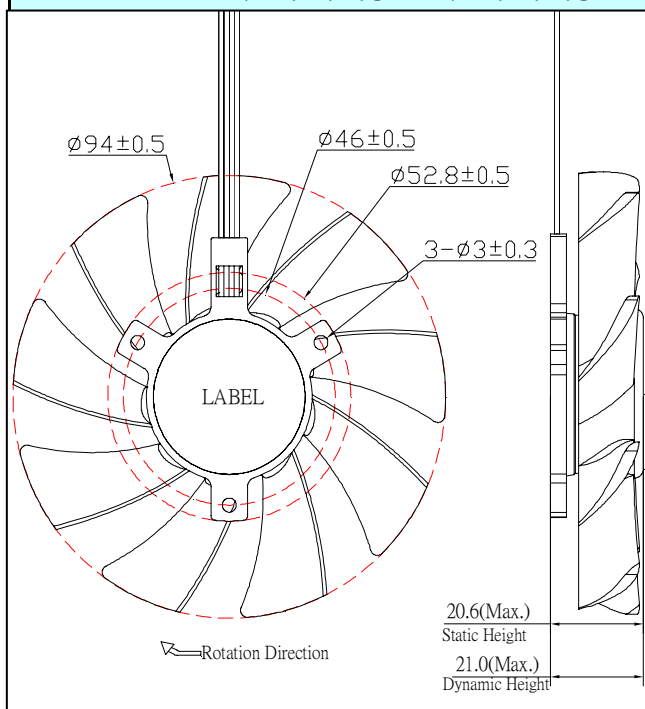

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

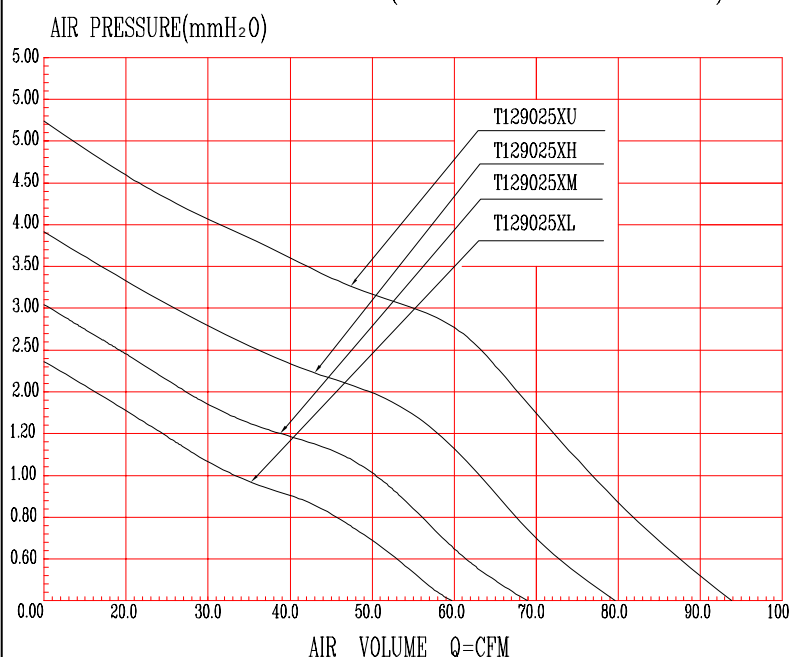

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129025BL	12	7~13.2	0.13	1.56	2100	59.56	1.69	2.35	35.7
T129025BM	12	7~13.2	0.18	2.16	2450	68.86	1.95	3.02	38.7
T129025BH	12	7~13.2	0.24	2.88	2850	79.61	2.26	3.91	44.3
T129025BU	12	7~13.2	0.38	4.56	3450	93.94	2.66	5.24	47.2
T129025DL	12	7~13.2	0.13	1.56	2100	59.56	1.69	2.35	35.7
T129025DM	12	7~13.2	0.18	2.16	2450	68.86	1.95	3.02	38.7
T129025DH	12	7~13.2	0.24	2.88	2850	79.61	2.26	3.91	44.3
T129025DU	12	7~13.2	0.38	4.56	3450	93.94	2.66	5.24	47.2
T129025SL	12	7~13.2	0.12	1.44	2100	59.56	1.69	2.35	35.7
T129025SM	12	7~13.2	0.18	2.16	2450	68.86	1.95	3.02	38.7
T129025SH	12	7~13.2	0.25	3.00	2850	79.61	2.26	3.91	44.3
T129025SU	12	7~13.2	0.38	4.56	3450	93.94	2.66	5.24	47.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12v L.M.H.U
24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 147g

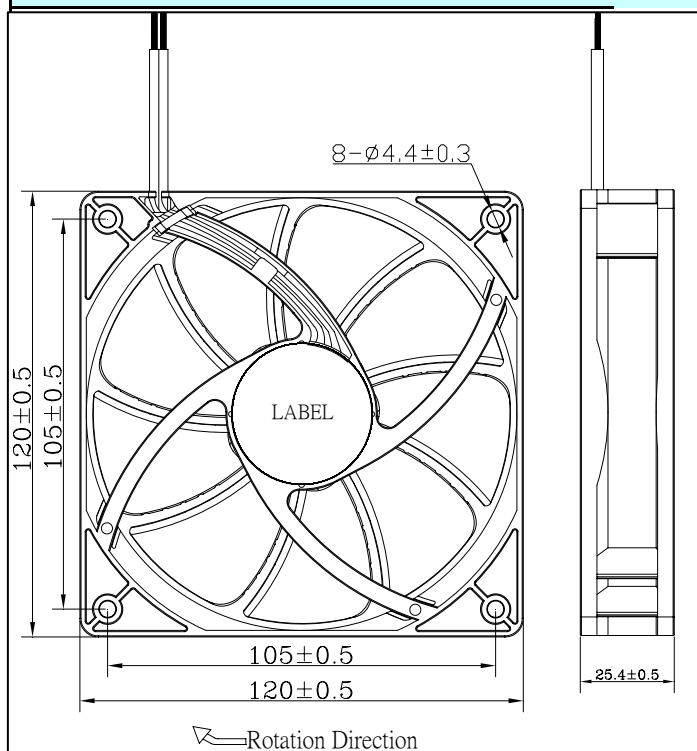

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

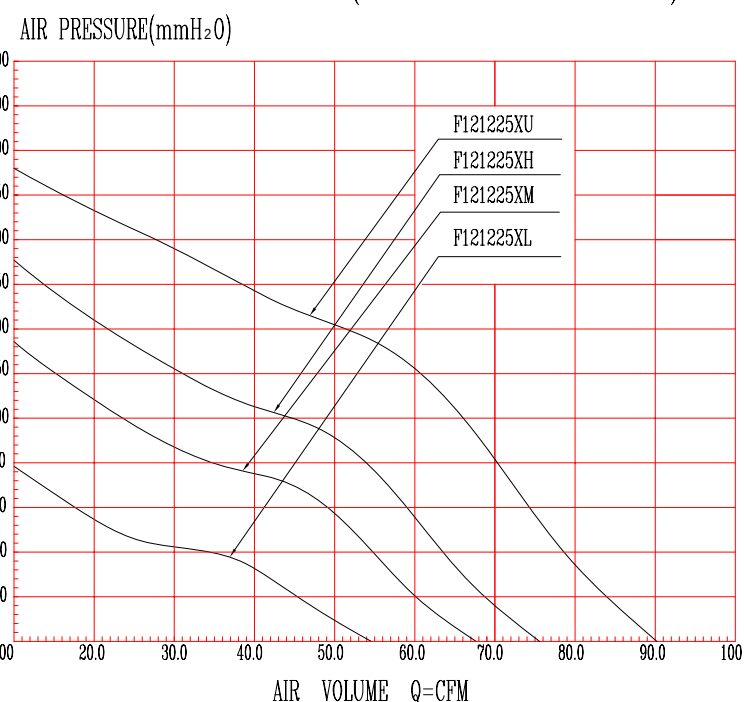

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121225*L	12	7~13.2	0.20	2.40	1500	55.64	1.58	1.99	26.2
F121225*M	12	7~13.2	0.25	3.00	1800	67.73	1.92	2.85	31.2
F121225*H	12	7~13.2	0.32	3.84	2100	71.14	2.02	3.77	36.4
F121225*U	12	7~13.2	0.40	4.80	2400	90.24	2.56	4.86	40.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 79g

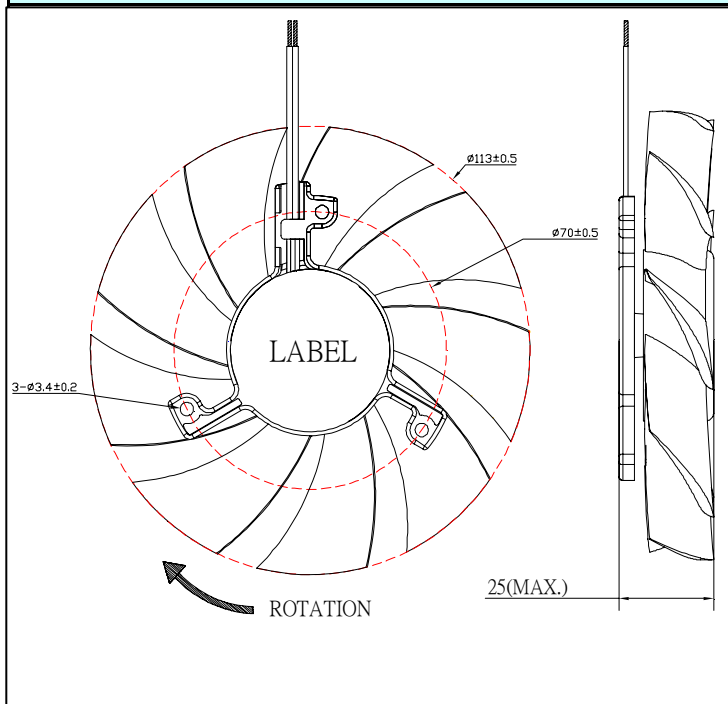

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

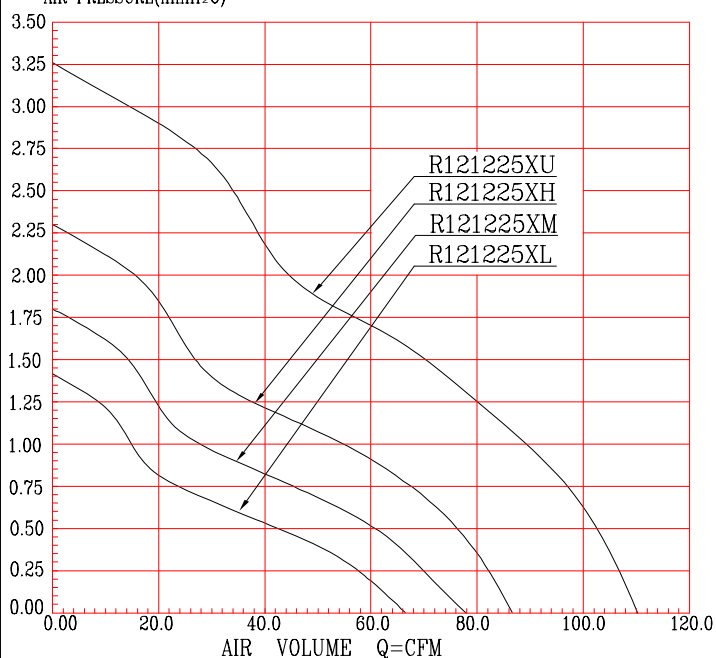

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T121225BL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
T121225BM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
T121225BH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
T121225BU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5
T121225DL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
T121225DM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
T121225DH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
T121225DU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5
T121225SL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
T121225SM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
T121225SH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
T121225SU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 140g

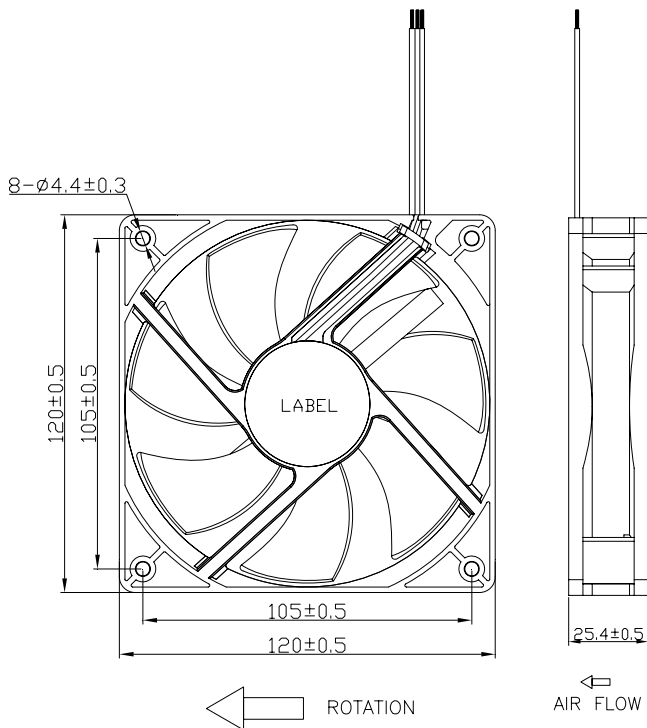

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

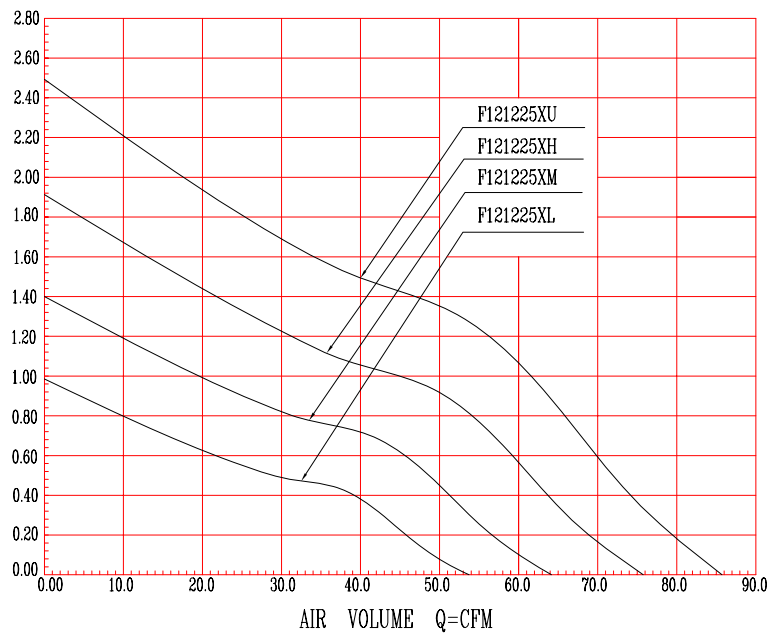

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121225BL	12	7~13.2	0.20	2.40	1500	53.63	1.52	0.97	30.6
R121225BM	12	7~13.2	0.25	3.00	1800	64.36	1.82	1.40	34.7
R121225BH	12	7~13.2	0.32	3.84	2100	75.08	2.13	1.91	38.8
R121225BU	12	7~13.2	0.40	4.80	2400	85.81	2.43	2.49	41.7
R121225DL	12	7~13.2	0.20	2.40	1500	53.63	1.52	0.97	30.6
R121225DM	12	7~13.2	0.25	3.00	1800	64.36	1.82	1.40	34.7
R121225DH	12	7~13.2	0.32	3.84	2100	75.08	2.13	1.91	38.8
R121225DU	12	7~13.2	0.40	4.80	2400	85.81	2.43	2.49	41.7
R121225SL	12	7~13.2	0.20	2.40	1500	53.63	1.52	0.97	30.6
R121225SM	12	7~13.2	0.25	3.00	1800	64.36	1.82	1.40	34.7
R121225SH	12	7~13.2	0.32	3.84	2100	75.08	2.13	1.91	38.8
R121225SU	12	7~13.2	0.40	4.80	2400	85.81	2.43	2.49	41.7

*Sound level measured at the distance of one meter from the axis of intake.

*Spec ifications are subject change without notice.

120×120×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 140g

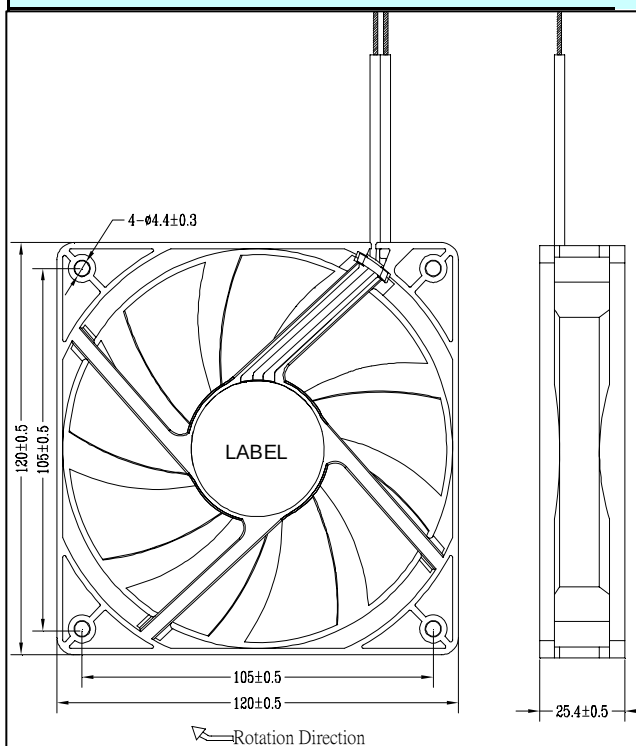

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESURE(mmH₂O)

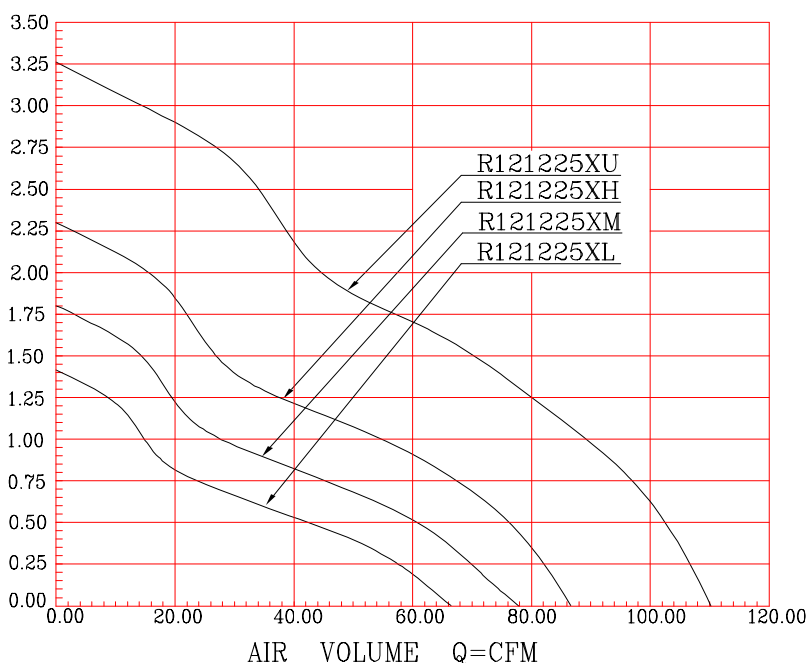

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121225BL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
R121225BM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
R121225BH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
R121225BU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5
R121225DL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
R121225DM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
R121225DH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
R121225DU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5
R121225SL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
R121225SM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
R121225SH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
R121225SU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5

*Sound level measured at the distance of one meter from the axis of intake.

*Spec ifications are subject change without notice.

122×122×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U

24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 140g

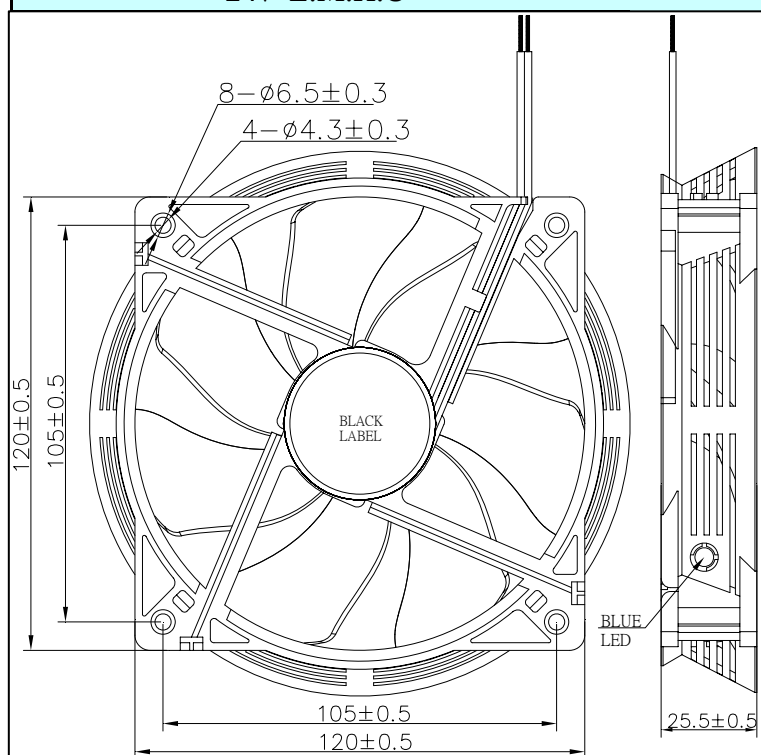

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESURE(mmH₂O)

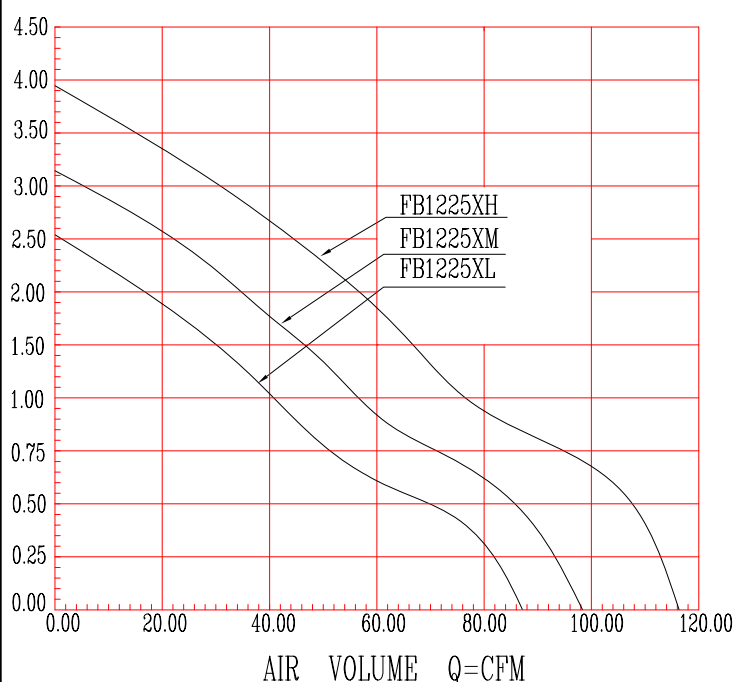

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121225BL	12	7~13.2	0.27	3.24	2000	87.19	2.47	2.52	40.5
R121225BM	12	7~13.2	0.35	4.20	2300	98.84	2.80	3.13	43
R121225BH	12	7~13.2	0.42	5.04	2600	116.03	3.29	3.83	46.1
R121225BU	12	7~13.2							
R121225DL	12	7~13.2	0.27	3.24	2000	87.19	2.47	2.52	40.5
R121225DM	12	7~13.2	0.35	4.20	2300	98.84	2.80	3.13	43
R121225DH	12	7~13.2	0.42	5.04	2600	116.03	3.29	3.83	46.1
R121225DU	12	7~13.2							
R121225SL	12	7~13.2	0.27	3.24	2000	87.19	2.47	2.52	40.5
R121225SM	12	7~13.2	0.35	4.20	2300	98.84	2.80	3.13	43
R121225SH	12	7~13.2	0.42	5.04	2600	116.03	3.29	3.83	46.1
R121225SU	12	7~13.2							

*Sound level measured at the distance of one meter from the axis of intake.

*Spec ifications are subject change without notice.



EVERFLOW

120×120×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12v L.M.H.U

24v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 140g

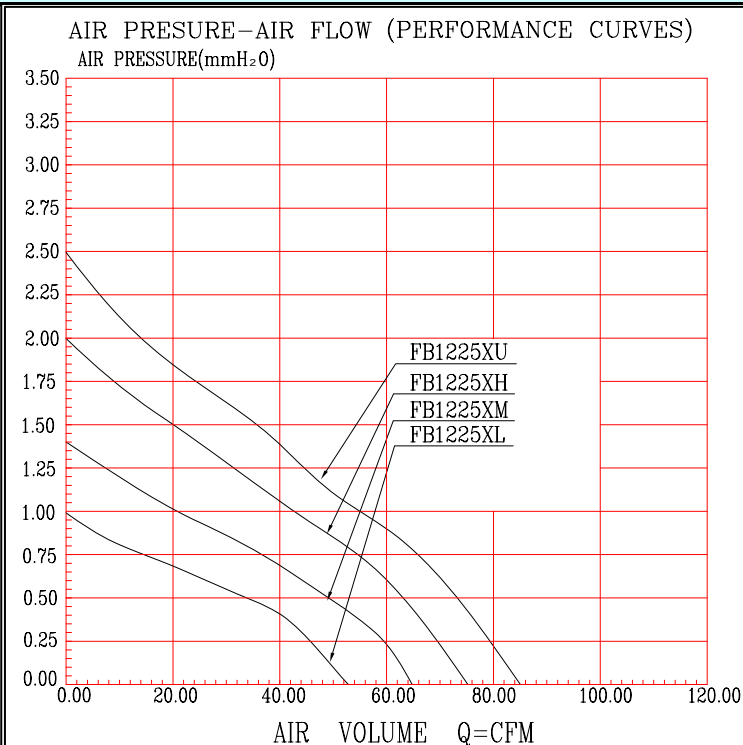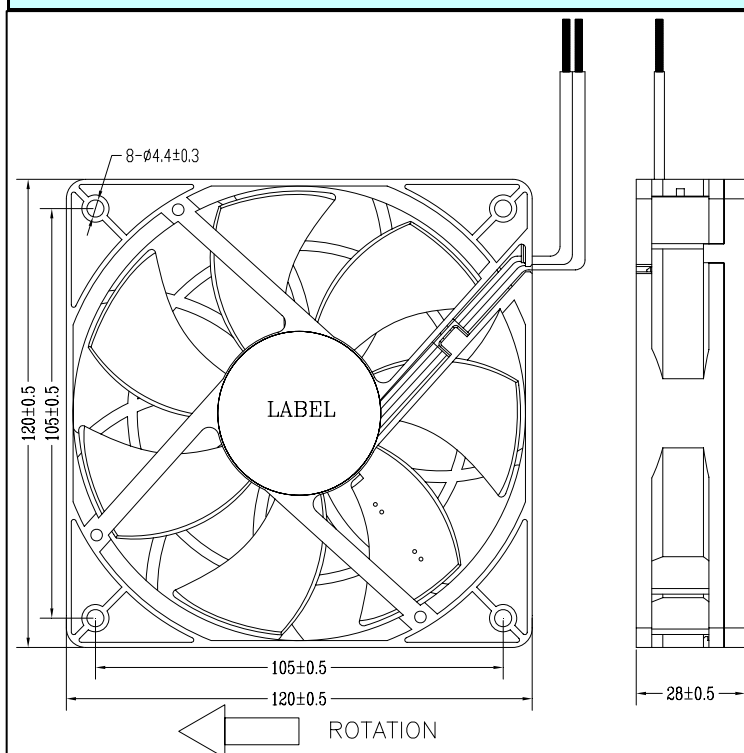

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121225BL	12	7~13.2	0.20	2.40	1500	53.63	1.52	0.97	30.6
R121225BM	12	7~13.2	0.25	3.00	1800	64.36	1.82	1.40	34.7
R121225BH	12	7~13.2	0.32	3.84	2100	75.08	2.13	1.91	38.8
R121225BU	12	7~13.2	0.40	4.80	2400	85.81	2.43	2.49	41.7
R121225SL	12	7~13.2	0.20	2.40	1500	53.63	1.52	0.97	30.6
R121225SM	12	7~13.2	0.25	3.00	1800	64.36	1.82	1.40	34.7
R121225SH	12	7~13.2	0.32	3.84	2100	75.08	2.13	1.91	38.8
R121225SU	12	7~13.2	0.40	4.80	2400	85.81	2.43	2.49	41.7

*Sound level measured at the distance of one meter from the axis of intake.

*Spec ifications are subject change without notice.

120×120×32MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 230g

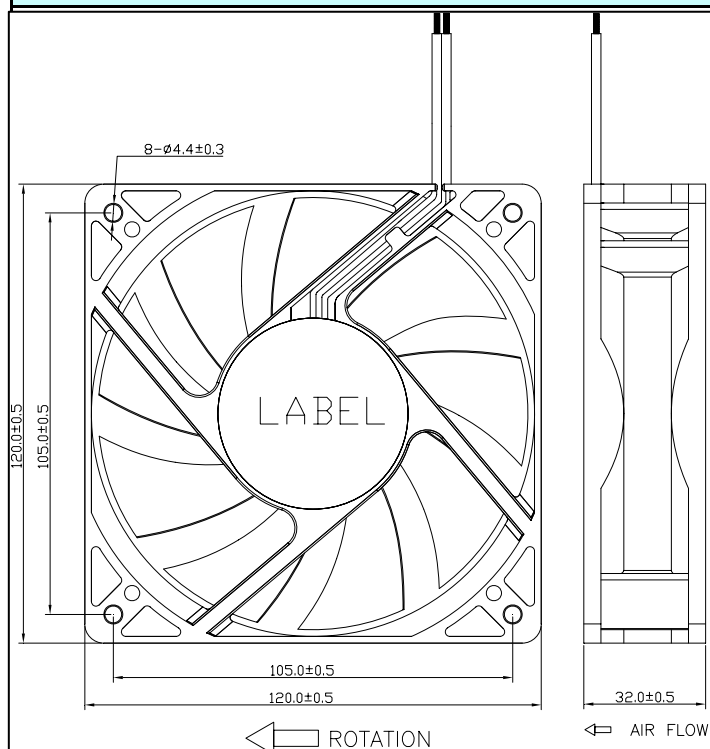

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

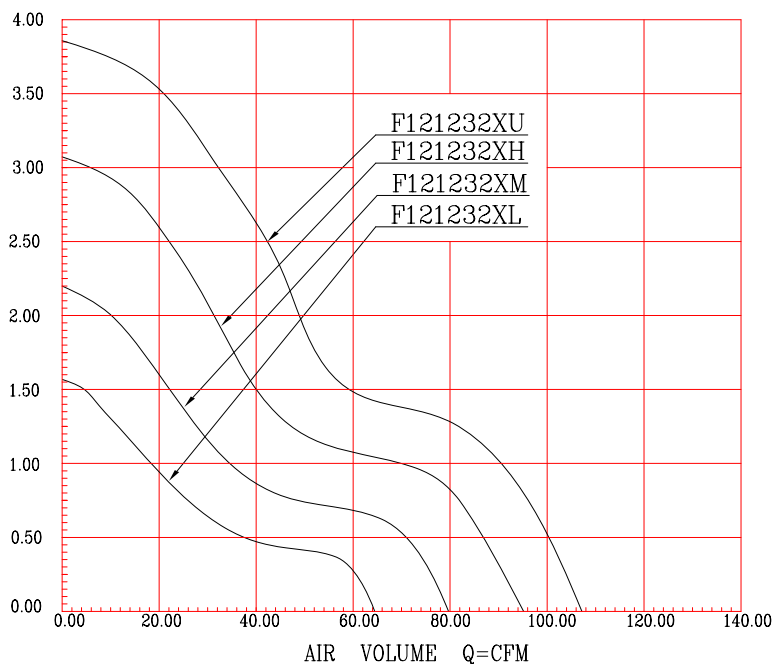

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121232BL	12	7~13.2	0.25	3.00	1800	79.73	2.26	2.20	32.7
F121232BM	12	7~13.2	0.50	6.00	2200	99.59	2.82	3.37	39
F121232BH	12	7~13.2	0.65	7.80	2600	116.06	3.29	4.53	45
F121232BU	12	7~13.2	1.00	12.00	3000	133.91	3.79	6.03	47

*Sound level measured at the distance of one meter from the axis of intake.

*Spec ifications are subject change without notice.

120×120×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12v L.M.H.U

24v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 276g

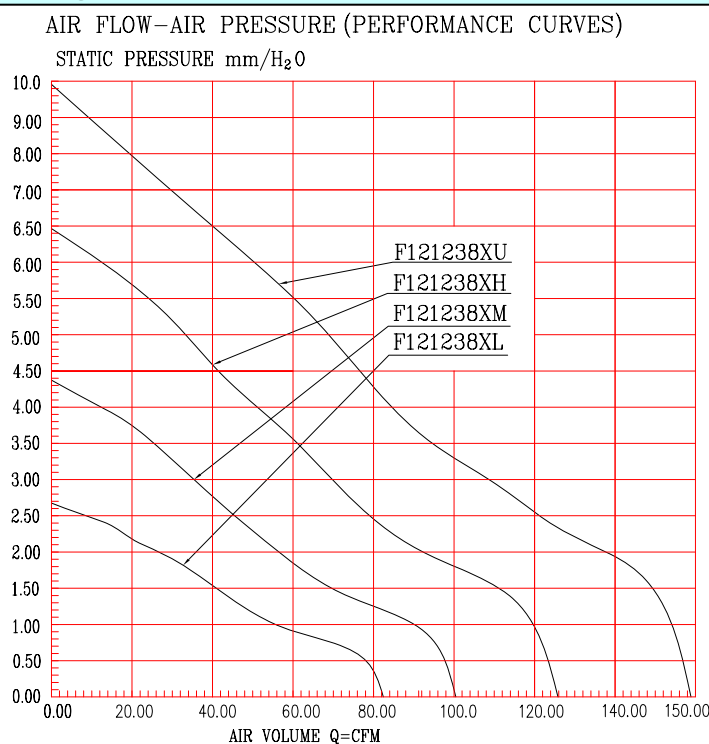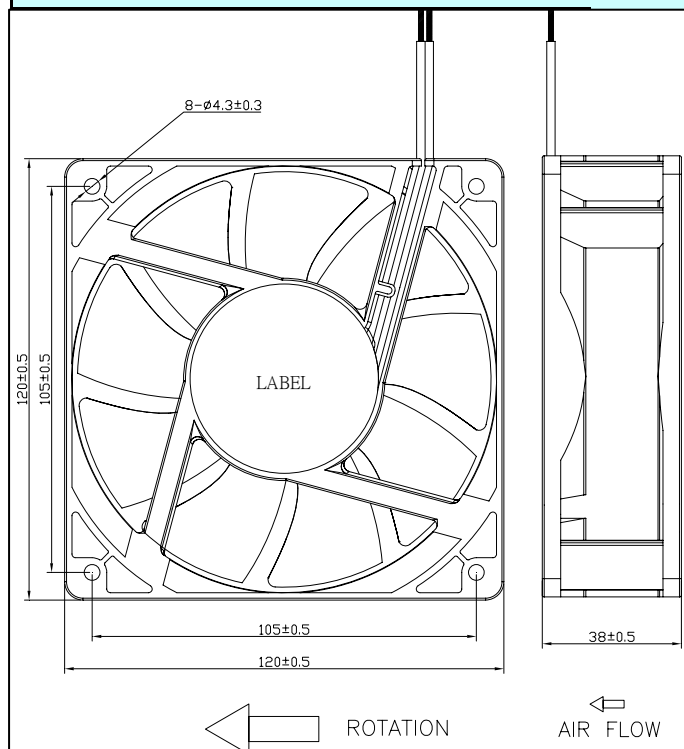

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121225BL	12	7~13.2	0.25	3.00	1800	82.30	2.33	2.68	30
F121225BM	12	7~13.2	0.50	6.00	2200	101.50	2.87	4.38	36.4
F121225BH	12	7~13.2	0.65	7.80	2600	125.90	3.57	6.49	43.1
F121225BU	12	7~13.2	1.00	12.00	3000	149.50	4.24	9.93	46.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×38MM SERIES

Bearing Type: Two ball bearing
One sleeve bearing

Rated Voltage 12v L.M.H.U
24v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 115g

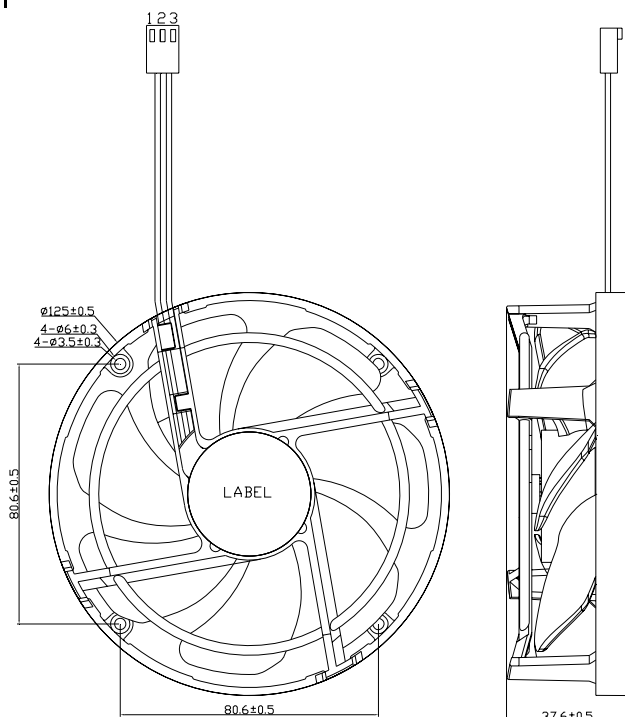

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

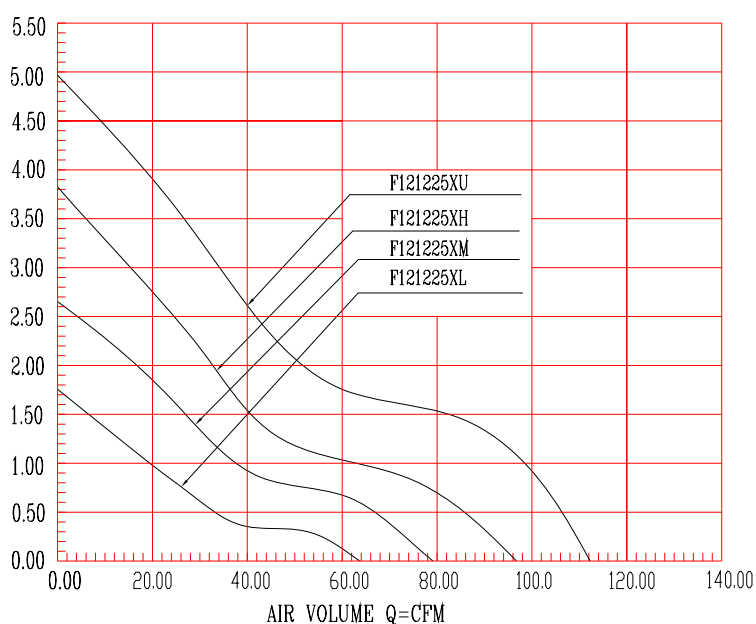

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121225BL	12	7~13.2	0.25	3.00	1800	63.85	1.81	1.76	32
F121225BM	12	7~13.2	0.50	6.00	2200	78.53	2.22	2.65	35
F121225BH	12	7~13.2	0.65	7.80	2600	96.65	2.74	3.84	38
F121225BU	12	7~13.2	1.00	12.00	3000	112.04	3.17	4.97	41
F121225DL	12	7~13.2	0.25	3.00	1800	63.85	1.81	1.76	32
F121225DM	12	7~13.2	0.50	6.00	2200	78.53	2.22	2.65	35
F121225DH	12	7~13.2	0.65	7.80	2600	96.65	2.74	3.84	38
F121225DU	12	7~13.2	1.00	12.00	3000	112.04	3.17	4.97	41

*Sound level measured at the distance of one meter from the axis of intake.

*Spec ifications are subject change without notice.

140×140×25MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 147g

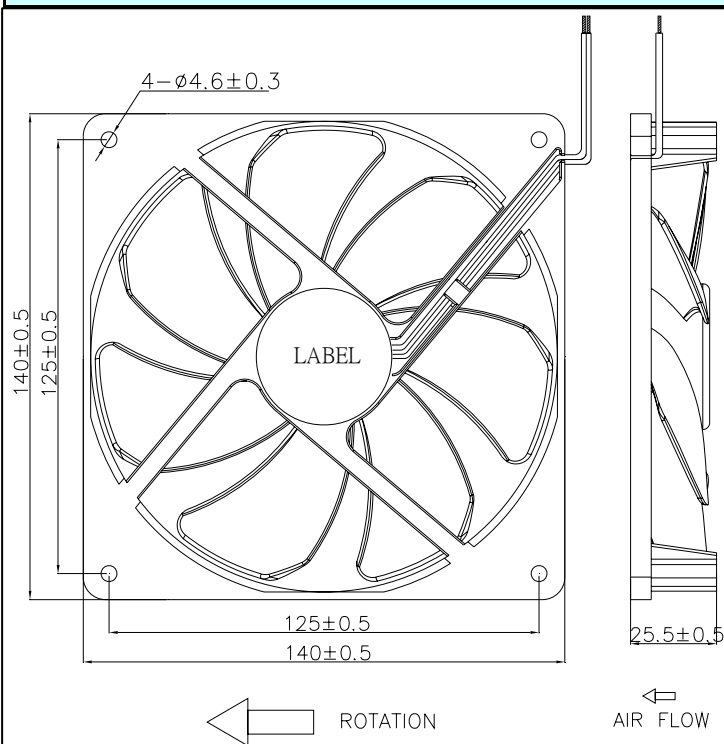

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

STATIC PRESSURE mm/H₂O

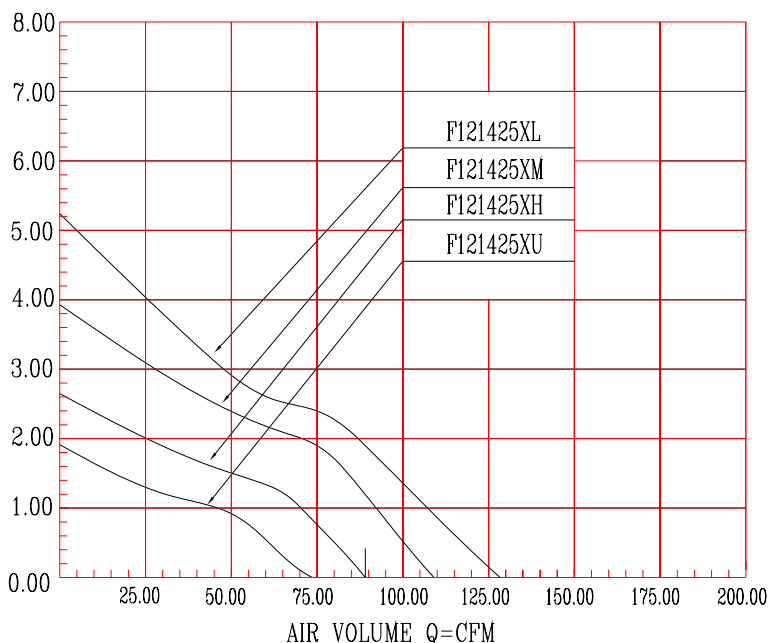

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121425BL	12	7~13.2	0.20	2.40	1500	74.20	2.10	1.82	26.5
R121425BM	12	7~13.2	0.35	4.20	1800	89.04	2.52	2.63	33.1
R121425BH	12	7~13.2	0.60	7.20	2200	108.81	3.08	3.96	39.2
R121425BU	12	7~13.2	1.10	13.20	2600	126.02	3.57	5.22	43.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

140×140×25MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 147g

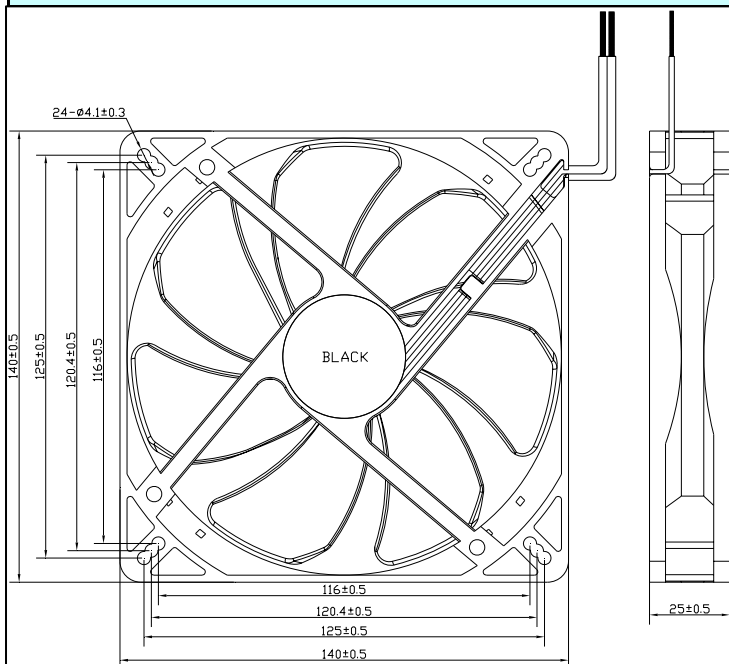

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

STATIC PRESSURE mm/H₂O

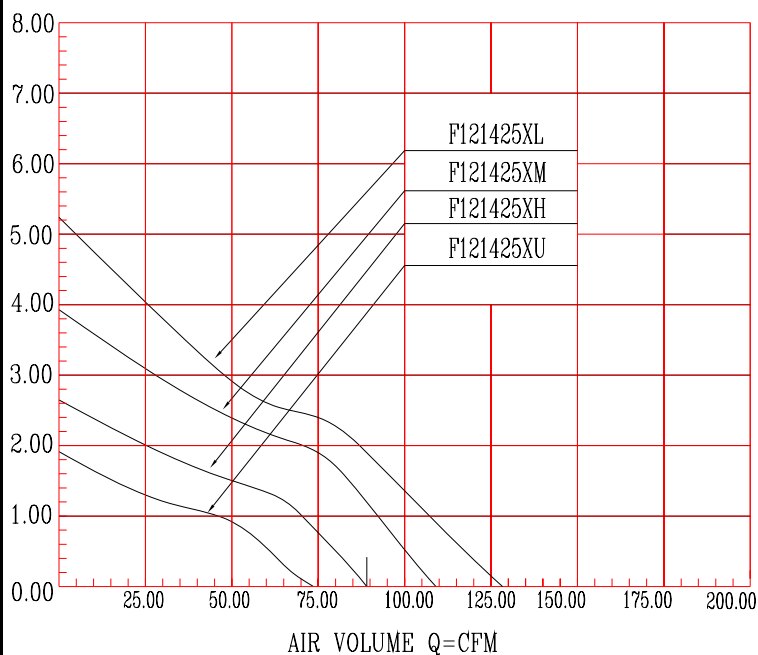

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121425BL	12	7~13.2	0.20	2.40	1500	74.20	2.10	1.82	26.5
F121425BM	12	7~13.2	0.35	4.20	1800	89.04	2.52	2.63	33.1
F121425BH	12	7~13.2	0.60	7.20	2200	108.81	3.08	3.96	39.2
F121425BU	12	7~13.2	1.10	13.20	2600	126.02	3.57	5.22	43.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.