

# DC FAN

## CD4010 series B

### General Specifications

#### Material

Frame – PBT (UL94-V0)  
impeller – PBT (UL94-V0)

#### Expected Life

Two Ball Bearing 60,000hrs (40°C)  
Long Life Bearing 35,000hrs (40°C)  
Sleeve Bearing 20,000hrs (40°C)


#### Lead Wire

+red -black or blue Sensor yellow


#### Temperature Range

Operating temperature  
-20°C ~ 70°C (Non-condensing)  
Strong temperature  
-40°C ~ 85°C (Non-condensing)

### Dimensions(Unit : mm)

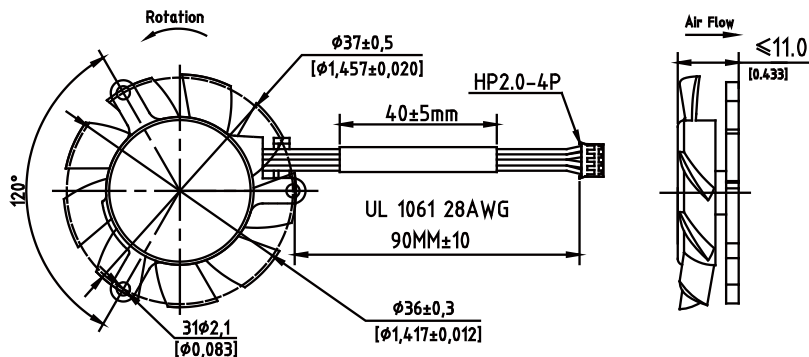

### P & Q CURVE (AT RATED VOLTAGE)

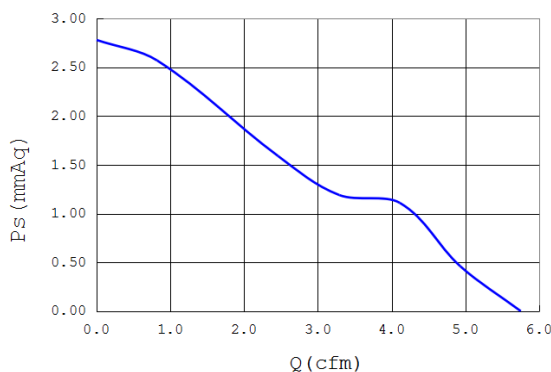

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure		Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m <sup>3</sup> /min	(mmH2O)	inch-H2O	dB(A)
CD4010H12X	12	7~13.8	0.13	1.56	5500	5.75	0.163	2.78	0.110	26.80