

BLOWER FAN

CD4010 series

General Specifications

Material

Frame – PBT (UL94-V0)
impeller – PBT (UL94-V0)

Expected Life

Two Ball Bearing 60,000hrs (40°C)
Sleeve Bearing 20,000hrs (40°C)


Lead Wire

+red -black or blue Sensor yellow


Temperature Range

Operating temperature
-20°C ~ 70°C (Non-condensing)
Strong temperature
-40°C ~ 85°C (Non-condensing)

Dimensions(Unit : mm)

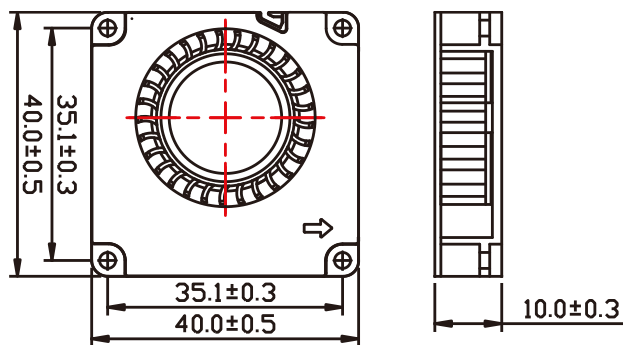

P & Q CURVE (AT RATED VOLTAGE)

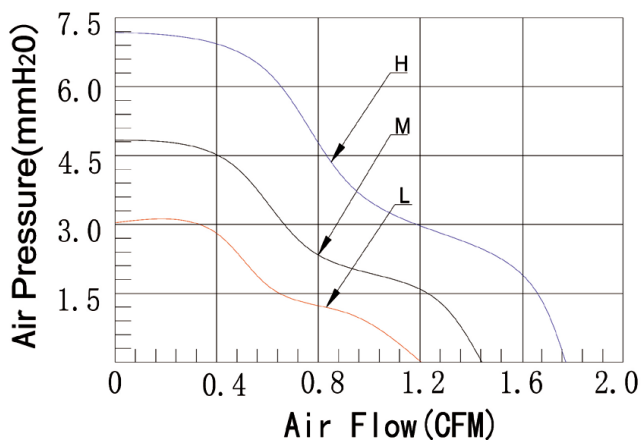

MODEL	Rated Voltage (V)	Operating Voltage (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow (CFM)	Static Pressure (mmH ₂ O)	Sound level (dBA)
CD4010L05X	5	4.5~5.5	0.15	0.75	5000	1.21	3.04	21.4
CD4010M05X			0.20	1	6000	1.45	4.81	24.3
CD4010H05X			0.25	1.25	7000	1.77	7.17	27.5
CD4010L12X	12	7~13.8	0.07	0.84	5000	1.21	3.04	21.4
CD4010M12X			0.10	1.20	6000	1.45	4.81	24.3
CD4010H12X			0.13	1.56	7000	1.77	7.17	27.5