

DC FAN

CD4028 series

General Specifications

Material

Frame – PBT (UL94-V0)
impeller – PBT (UL94-V0)

Expected Life

Two Ball Bearing 60,000hrs (40°C)


Lead Wire

+red -black or blue Sensor yellow


Temperature Range

Operating temperature
-20°C ~ 70°C (Non-condensing)
Strong temperature
-40°C ~ 85°C (Non-condensing)

Dimensions(Unit : mm)

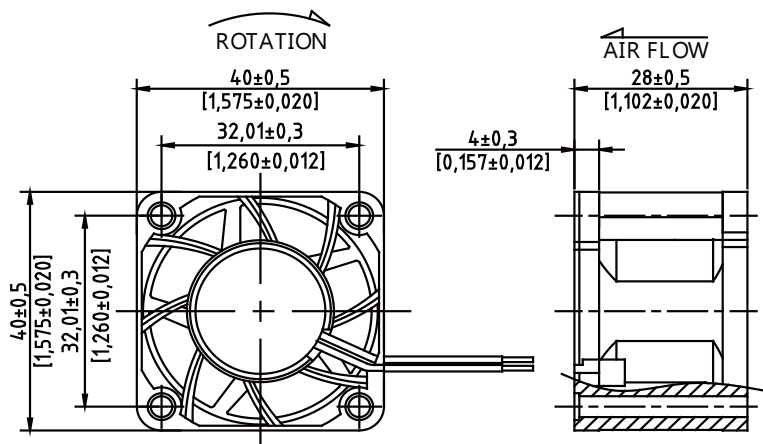

P & Q CURVE (AT RATED VOLTAGE)

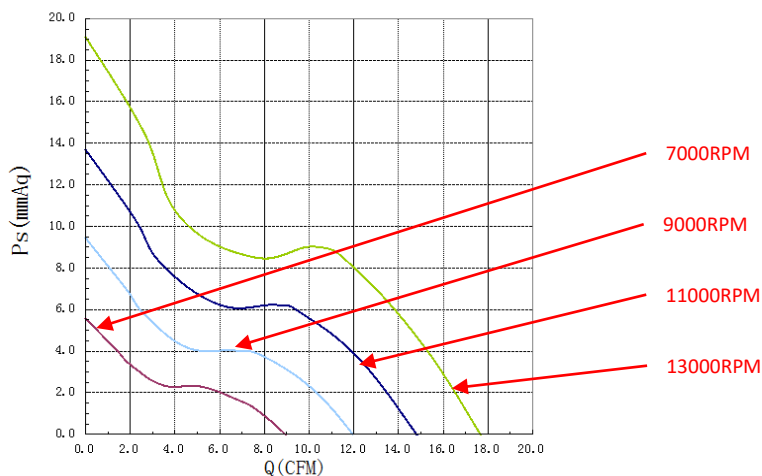

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure		Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min	(mmH2O)	inch-H2O	dB(A)
CD4028E12X	12	7~13.8	0.07	0.840	7000	9.54	0.270	5.57	0.219	28.50
CD4028L12X		7~13.8	0.143	1.716	9000	11.96	0.339	9.43	0.371	36.90
CD4028M12X		7~13.8	0.193	2.316	11000	14.83	0.420	13.70	0.540	42.00
CD4028H12X		7~13.8	0.213	2.556	13000	17.70	0.501	19.10	0.752	46.20