


DC Brushless Centrifugal Blower Forward Curved Single Inlet
直流无刷单进风前向式离心风机Φ160-062

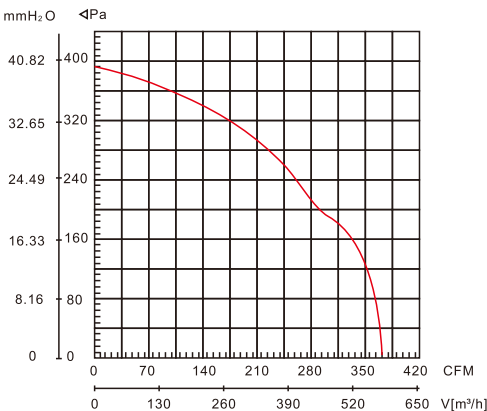

Material	impeller made of galvanized sheet
Type of protection	IP42
Bearing	Two Ball bearings
Technical features	Control input 0~5VDC/PWM Tach output
Protection	Locked-rotor protection, Current limited Under-voltage and over-voltage lockout protection Soft start
Motor Insulation Class	F
Direction of rotation	Clockwise, see on the impeller
Approvals	CE, CCC
Amb. Temp	-20~+60°C


材料	风轮采用镀锌板制成
防护等级	IP42
轴承	双滚珠轴承
电气性能	控制信号输入 0~5VDC/PWM 速度反馈信号
保护	堵转保护、限流保护，欠压和过压停止运转保护，软启动
绝缘等级	F级
转向	从扇叶面看为顺时针
产品符合的认证	CE、CCC
工作温度范围	-20~+60°C

项目Item	额定电压	工作电压	输入功率	额定转速	风量	风压	噪音
	Rated Voltage	Operating Voltage	Input power	Rated Speed	Air Flow	Air Pressure	Noise
型号Model	VDC	VDC	W	RPM	M³/H	Pa	dBA
DLT-F160062D024	24	21~26	70	1950	582	391	63

注：可以按客人要求进行定制

产品尺寸图

Product dimension drawing

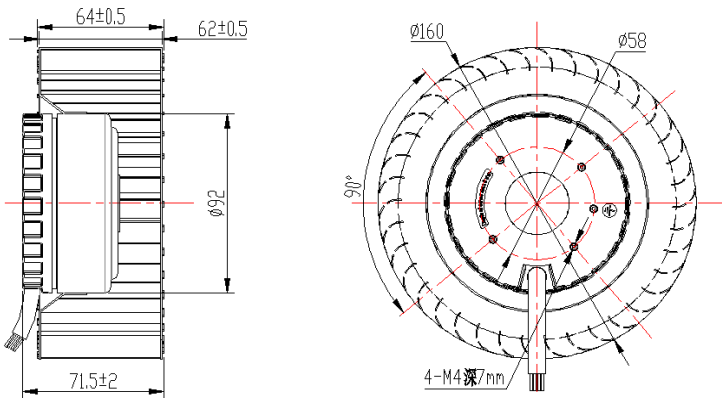

DC前倾式风机
DC forward tilt fan

DC鼓风风机系列
DC blower series

DC后倾式风机
DC backward tilt fan

EC前倾式风机
EC forward tilt fan

EC后倾式风机
EC rear tilt fan

EC轴流风机
EC axial flow fan

EC排气扇系列
EC Business exhaust fan

DC电机系列
Brushless DC motor

EC电机系列
Brushless EC motor