


DC Brushless Centrifugal Blower Forward Curved Single Inlet 直流无刷单进风前向式离心风机Φ180-062

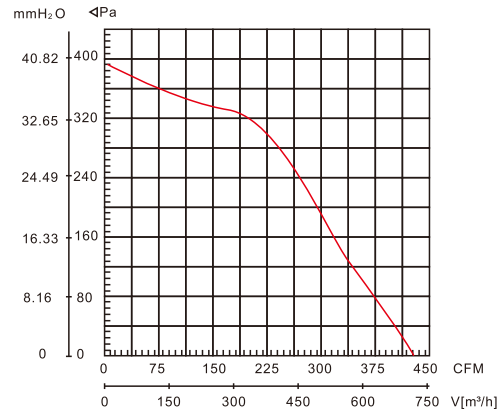

Material	impeller made of galvanized sheet
Type of protection	IP42
Bearing	Two Ball bearings
Technical features	Control input 0~5VDC/PWM Tach output
Protection	Locked-rotor protection, Current limited Under-voltage and over-voltage lockout protection Soft start
Motor Insulation Class	F
Direction of rotation	Clockwise, see on the impeller
Approvals	CE, CCC
Amb. Temp	-20~+60°C

材料	风轮采用镀锌板制成
防护等级	IP42
轴承	双滚珠轴承
电气性能	控制信号输入0~5VDC/PWM 速度反馈信号
保护	堵转保护、限流保护，欠压和过压停止 运转保护，软启动
绝缘等级	F级
转向	从扇叶面看为顺时针
产品符合的认证	CE、CCC
工作温度范围	-20~+60°C

项目Item	额定电压	工作电压	输入功率	额定转速	风量	风压	噪音
型号Model	Rated Voltage	Operating Voltage	Input power	Rated Speed	Air Flow	Air Pressure	Noise
	VDC	VDC	W	RPM	M ³ /H	Pa	dBA
DLT-F180062D024	24	21~26	75	1800	730	390	61

注：可以按客人要求进行定制

产品尺寸图

Product dimension drawing

