

B9733

97×97×33MM SERIES

Bearing Type: Two ball bearing


Rated Voltage: 12V

Material : Housing Plastic (UL 94V-0)
Impeller Plastic (UL 94V-0)


Protection : Auto-Restart

Operating Temp : ~10~70°C

Weight : 165g

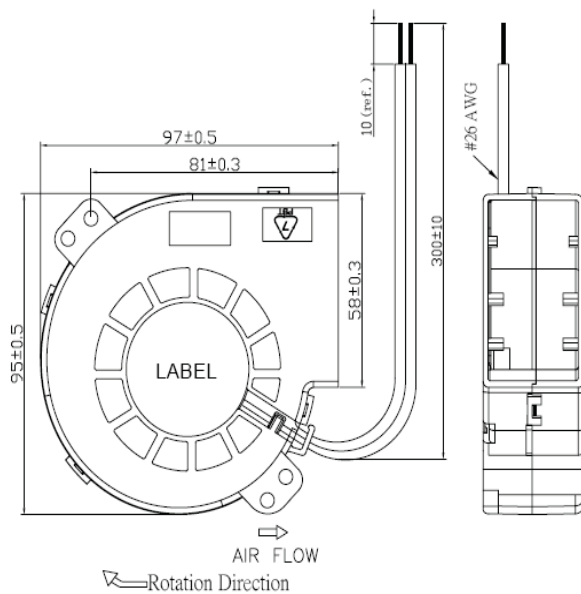

AIR FLOW-AIR PRESSURE PERFORMANCE CURVES
STATIC PRESSURE mm/H₂O

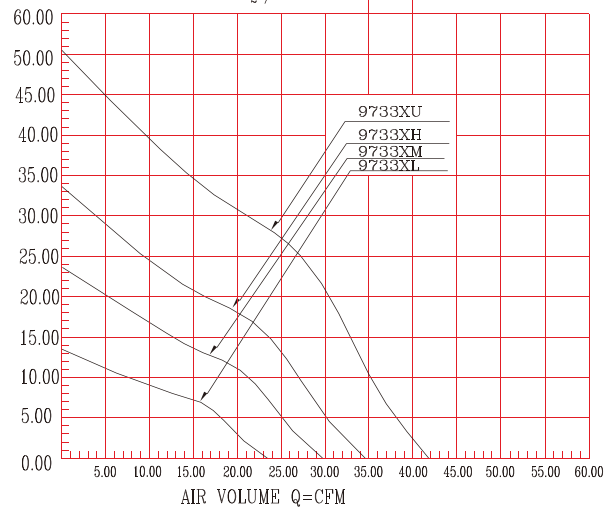

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min	(mmH ₂ O)	dB(A)
B129733BL	12	7~13.2	0.4	4.8	2600	23.53	0.67	13.57	46.4
B129733BM	12	7~13.2	0.45	5.4	3200	29.28	0.83	23.46	50.5
B129733BH	12	7~13.2	0.8	9.6	3800	34.58	1.01	33.67	55.3
B129733BU	12	7~13.2	1.2	14.4	4600	41.65	1.18	50.47	59.8

NOTES:"X"="B"

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject to change without notice. Please visit EF website at www.everflowtech.com for more update information.

*All model could be customized. Please contact EF sales department.