

F-R1225七片葉

120×120×25MM SERIES

Bearing Type: Two ball bearing
EBR



Rated Voltage: 12V/24V

Material : Housing Plastic (UL 94V-0)
Impeller Plastic (UL 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 140g

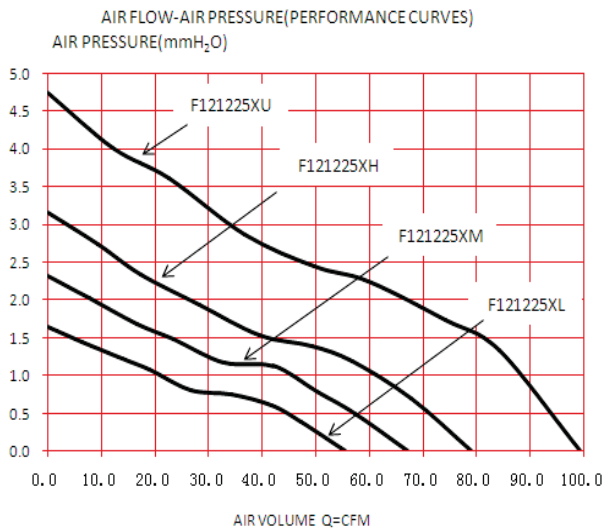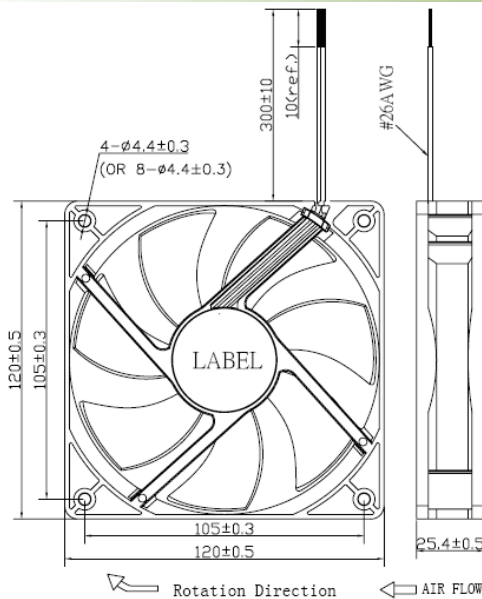

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
R121225BL	12	7~13.2	0.08	0.96	1500	55.44	1.57	1.64	28
R121225BM	12	7~13.2	0.13	1.56	1800	67.05	1.90	2.32	34.5
R121225BH	12	7~13.2	0.2	2.4	2100	79	2.24	3.15	39
R121225BU	12	7~13.2	0.4	4.8	2600	99.41	2.82	4.75	45
R121225SL	12	7~13.2	0.08	0.96	1500	55.44	1.57	1.64	28
R121225SM	12	7~13.2	0.13	1.56	1800	67.05	1.90	2.32	34.5
R121225SH	12	7~13.2	0.2	2.4	2100	79	2.24	3.15	39
R121225SU	12	7~13.2	0.4	4.8	2600	99.41	2.82	4.75	45

NOTES:"X"="B" or "S"

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject to change without notice. Please visit EF website at www.everflowtech.com for more update information.

*All model could be customized. Please contact EF sales department.