

F1225九片(第二代)

120×120×25MM SERIES

Bearing Type: Two ball bearing
EBR


Rated Voltage: 12V/24V

Material : Housing Plastic (UL 94V-0)
Impeller Plastic (UL 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 140g

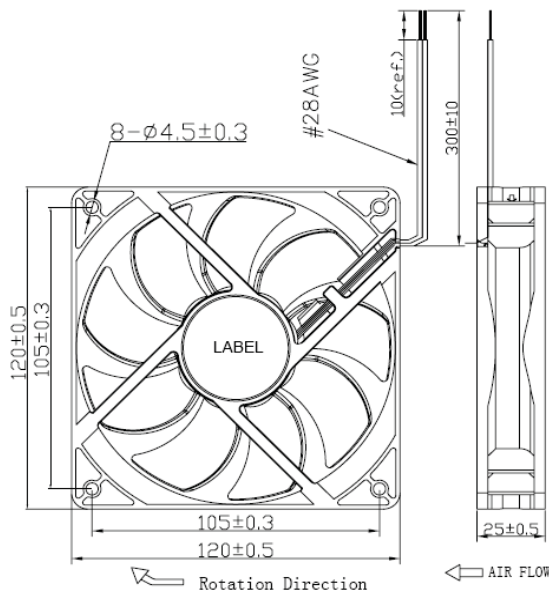

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

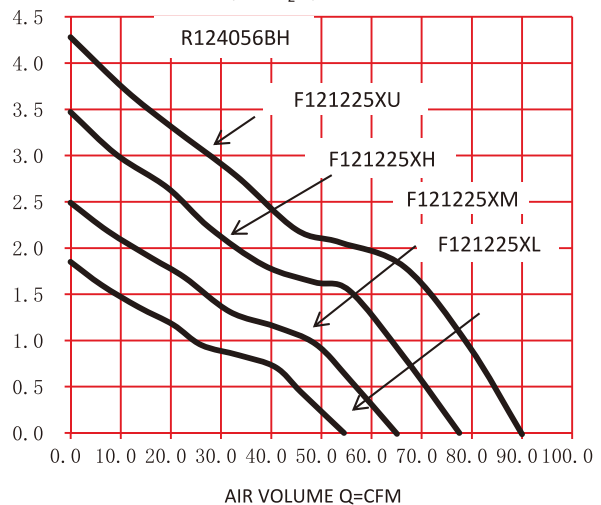

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121225BL	12	7~13.2	0.1	1.2	1500	54.5	1.54	1.85	28
F121225BM	12	7~13.2	0.17	2.04	1800	65.06	1.84	2.49	32.5
F121225BH	12	7~13.2	0.26	3.12	2100	77.49	2.20	3.4	37.5
F121225BU	12	7~13.2	0.43	5.16	2400	90.18	2.55	4.28	40.8
F121225SL	12	7~13.2	0.1	1.2	1500	54.5	1.54	1.85	28
F121225SM	12	7~13.2	0.17	2.04	1800	65.06	1.84	2.49	32.5
F121225SH	12	7~13.2	0.26	3.12	2100	77.49	2.20	3.47	37.5
F121225SU	12	7~13.2	0.4	4.8	2400	90.18	2.55	4.28	40.8

NOTES:"X"="B" or "S"

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject to change without notice. Please visit EF website at www.everflowtech.com for more update information.

*All model could be customized. Please contact EF sales department.