

F1232

120×120×32MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V


Material : Housing Plastic (UL 94V-0)

Impeller Plastic (UL 94V-0)


Protection : Auto-Restart

Operating Temp : ~10~70°C

Weight : 230g

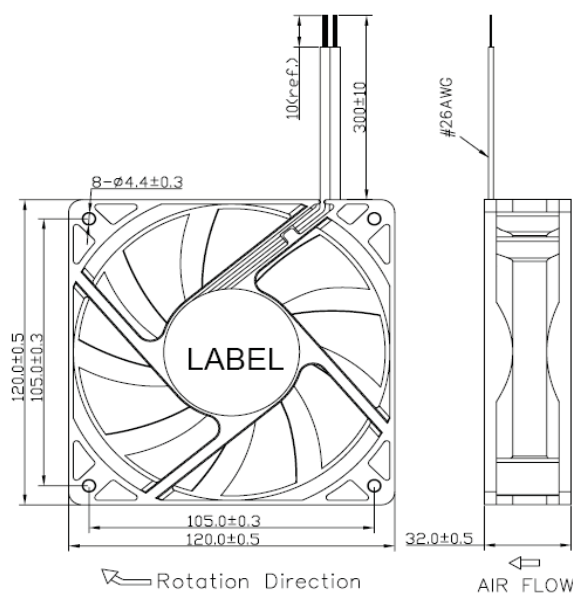

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

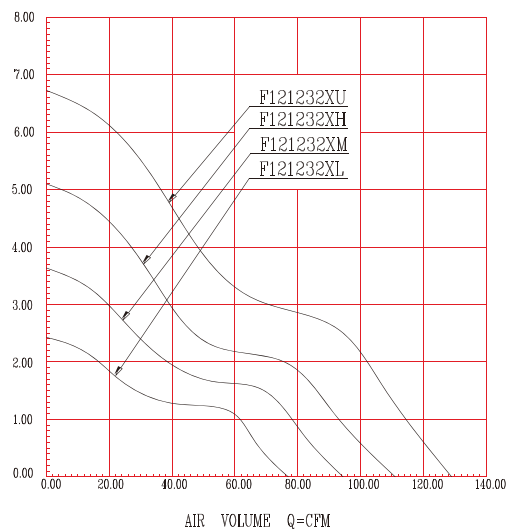

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
F121232BL	12	7~13.2	0.25	3	1800	77.12	2.18	2.44	32.7
F121232BM	12	7~13.2	0.50	6	2200	94.26	2.67	3.65	39
F121232BH	12	7~13.2	0.65	7.8	2600	111.39	3.16	5.10	45
F121232BU	12	7~13.2	1.00	12	3000	128.53	3.64	6.79	47

NOTES:"X"="B"

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject to change without notice. Please visit EF website at www.everflowtech.com for more update information.

*All model could be customized. Please contact EF sales department.