

F12038 第二套新開模

120×120×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL 94V-0)

Impeller Plastic (UL 94V-0)


Protection : Auto-Restart

Operating Temp : ~10~70°C

Weight : 325g

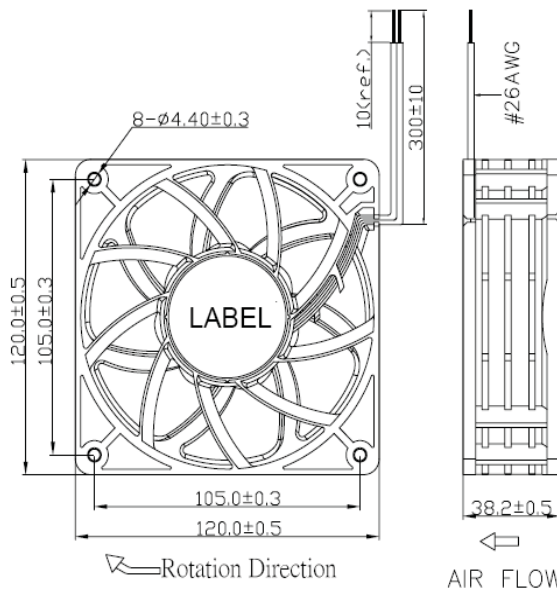

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

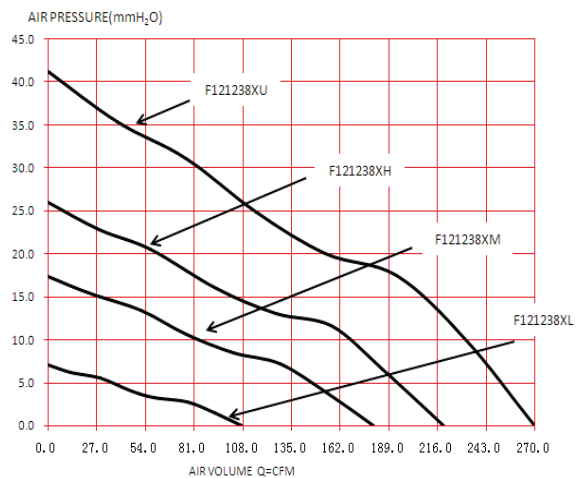

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min	(mmH ₂ O)	dB(A)
F121238BL	12	7~12.6	0.41	4.92	3000	107.81	3.05	7.04	44
F121238BM	12	7~12.6	1.3	15.6	5000	180.61	5.12	17.4	58
F121238BH	12	7~12.6	2.5	30	6200	222.33	6.31	23.27	65
F121238BU	12	7~12.6	3.51	42.12	7200	269.91	7.65	41.25	65.9

NOTES:"X"="B"

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject to change without notice. Please visit EF website at www.everflowtech.com for more update information.

*All model could be customized. Please contact EF sales department.