

F12038第三套新开模

120×120×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL 94V-0)

Impeller Plastic (UL 94V-0)


Protection : Auto-Restart

Operating Temp : ~10~70°C

Weight : 340g

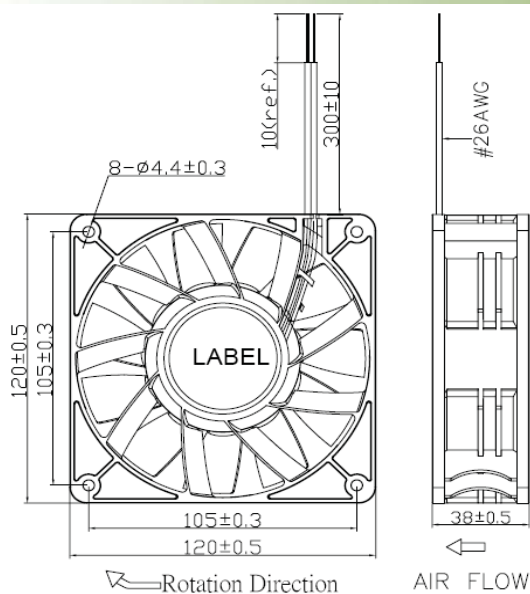

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

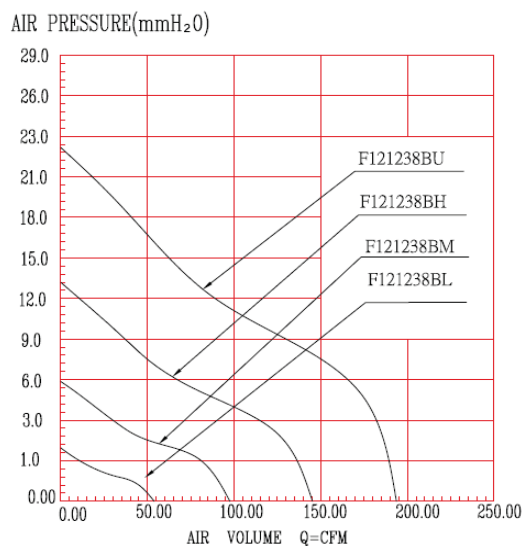

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
F121238BL	12	7~13.2	0.38	4.56	1200	53.66	1.52	1.74	29
F121238BM	12	7~13.2	0.45	5.4	2200	98.38	2.79	5.83	45
F121238BH	12	7~13.2	1.0	12	3200	145.9	4.14	13.24	54
F121238BU	12	7~13.2	2.5	30	4200	193.38	5.49	22.65	61

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject to change without notice. Please visit EF website at www.everflowtech.com for more update information.

*All model could be customized. Please contact EF sales department.