

F14025雙邊框

140×140×25MM SERIES

Bearing Type: Two ball bearing
EBR


Rated Voltage: 12V

Material : Housing Plastic (UL 94V-0)
Impeller Plastic (UL 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 147g

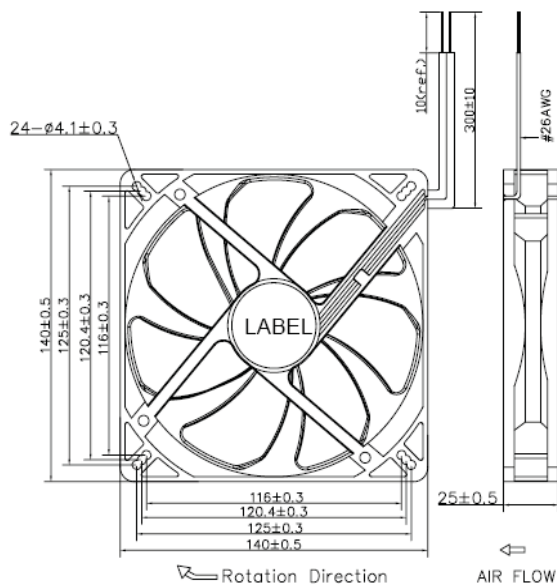

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE (mmH₂O)

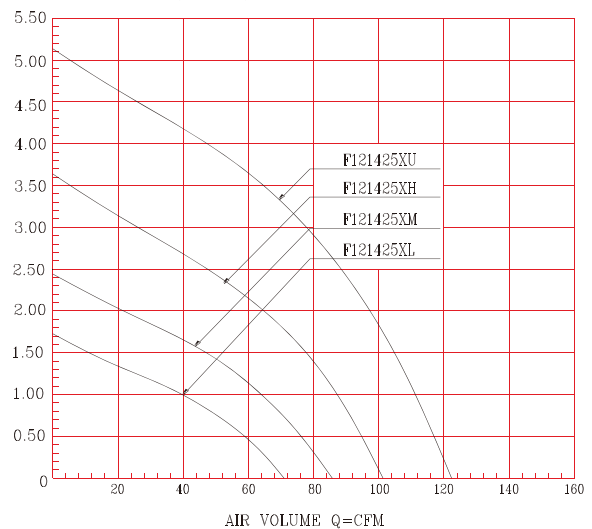

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
F121425BL	12	7~13.2	0.20	2.4	1500	70.94	2.01	1.71	26.5
F121425BM	12	7~13.2	0.35	4.2	1800	85.13	2.41	2.46	33.1
F121425BH	12	7~13.2	0.60	7.2	2200	104.05	2.95	3.68	39.2
F121425BU	12	7~13.2	1.10	13.2	2600	122.97	3.48	5.14	43.3
F121425SL	12	7~13.2	0.20	2.4	1500	70.94	2.01	1.71	26.5
F121425SM	12	7~13.2	0.35	4.2	1800	85.13	2.41	2.46	33.1
F121425SH	12	7~13.2	0.60	7.2	2200	104.05	2.95	3.68	39.2

NOTES:"X"="B" or "S"

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject to change without notice. Please visit EF website at www.everflowtech.com for more update information.

*All model could be customized. Please contact EF sales department.