

R18017

180×180×17MM SERIES

Bearing Type: EBR


Rated Voltage: 5V

Material : Housing Plastic (UL 94V-0)
Impeller Plastic (UL 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 131g

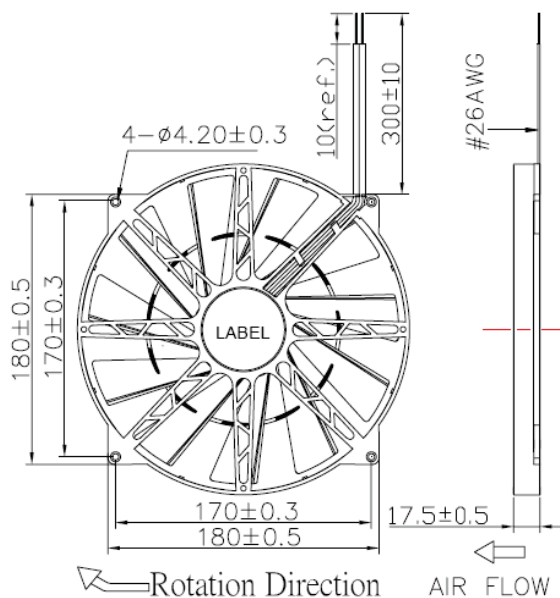

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

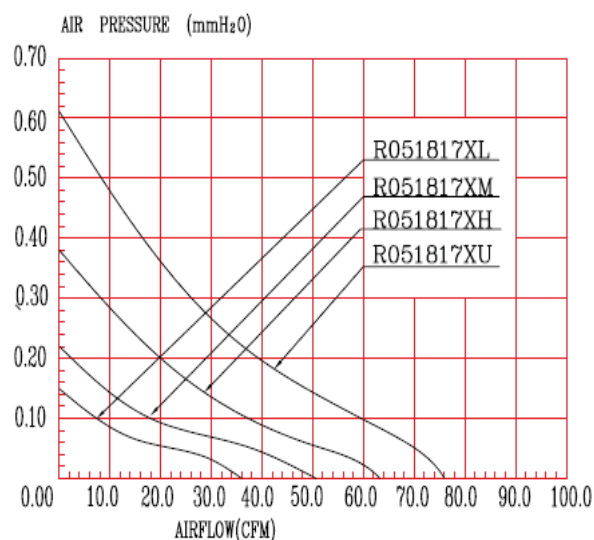

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
R051817SL	5	2.5~5.5	0.22	1.1	600	37.93	1.07	0.15	22.8
R051817SM	5	2.5~5.5	0.24	1.2	800	50.57	1.43	0.27	29
R051817SH	5	2.5~5.5	0.26	1.3	1000	63.21	1.79	0.38	33.8
R051817SU	5	2.5~5.5	0.30	1.5	1200	75.86	2.15	0.61	37.8

NOTES:"X"="S"

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject to change without notice. Please visit EF website at www.everflowtech.com for more update information.

*All model could be customized. Please contact EF sales department.