


DC Brushless Centrifugal Blower Forward Curved Single Inlet 直流无刷单进风前向式离心风机Φ120-062

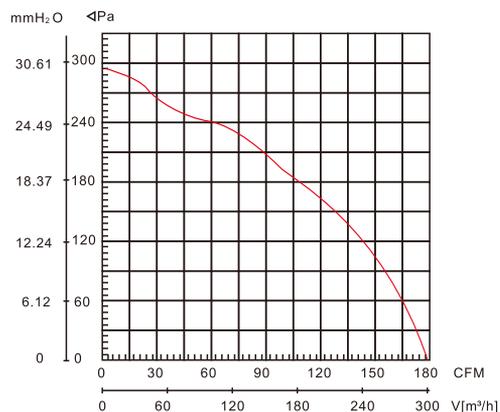


Material	impeller made of galvanized sheet	材料	风轮采用镀锌板制成
Type of protection	IP42	防护等级	IP42
Bearing	Ball bearings	轴承	滚珠轴承
Technical features	Control input 0~5VDC/PWM Tach output	电气性能	控制信号输入 0~5VDC/PWM 速度反馈信号
Protection	Locked-rotor protection, Current limited Under-voltage and over-voltage lockout protection Soft start	保护	堵转保护、限流保护，欠压和过压停止 运转保护，软启动
Motor Insulation Class	F	绝缘等级	F级
Direction of rotation	Clockwise, see on the impeller	转向	从扇叶面看为顺时针
Approvals	CE, CCC	产品符合的认证	CE、CCC
Amb. Temp	-20~+60°C	工作温度范围	-20~+60°C

项目Item	额定电压	工作电压	额定电流	额定转速	风量	风压	噪音
	Rated Voltage	Operating Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise
型号Model	VDC	VDC	A	RPM	M³/H	Pa	dBA
DLT-F120062D024	24	21~26	1.2	2400	284	291	60.6
DLT-F120062D012	12	9~14	2.5	2400	284	291	60.6

注：可以按客人要求进行定制

产品尺寸图

Product dimension drawing

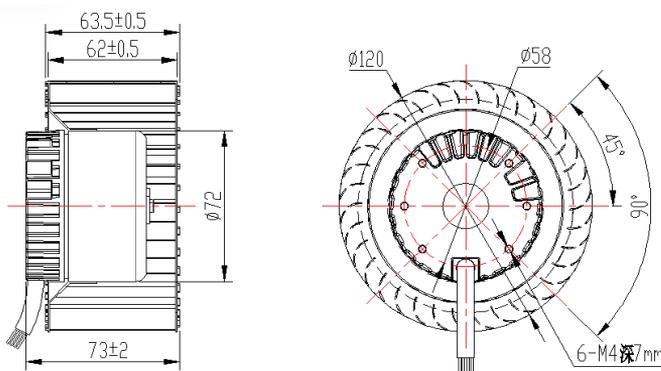

DC前倾式风机
DC forward tilt fan

DC轴流风机系列
DC blower series

DC后倾式风机
DC backward tilt fan

EC前倾式风机
EC forward tilt fan

EC后倾式风机
EC rear tilt fan

EC轴流风机
EC axial flow fan

EC排气扇系列
EC Brushless exhaust fan

DC电机系列
Brushless DC motor

EC电机系列
Brushless EC motor